GOVERNMENT OF INDIA
**OFFICE OF DIRECTOR GENERAL OF CIVIL AVIATION**
TECHNICAL CENTRE, OPP SAFDARJANG AIRPORT, NEW DELHI

# CIVIL AVIATION REQUIREMENTS
# SECTION 9 – AIR SPACE AND AIR NAVIGATION SERVICES
# STANDARDS SERIES 'D', PART V

**ISSUE V, 10th November 2026** **EFFECTIVE: FORTHWITH**

F. No. 21011/49/2018-ANS

Subject: **Aeronautical Telecommunications – Secondary Surveillance Radar**

## INTRODUCTION

In pursuant to Article 28 of the Convention on International Civil Aviation each contracting State undertakes to provide in its territory, air navigation facilities to facilitate air navigation and also adopt and put in to operation the appropriate standard systems for communication procedures, codes, markings, signals etc., in accordance with standards which may be recommended or established from time to time, pursuant to the Convention. International Civil Aviation Organization adopts and amends from time to time, as may be necessary, international standards and recommended practices and procedures for Aeronautical Telecommunications – Secondary Surveillance Radar in Annex 10 Volume IV.
This CAR is issued under the provisions of Rule 29C and Rule 133A of the Aircraft Rules, 1937 for the requirements to be followed in respect of Aeronautical Telecommunications – Secondary Surveillance Radar.

This CAR is issued in supersession of CAR Section 4 Series D Part V, Issue III dated 27th July 2015.

## APPLICABILITY

This CAR is applicable to Air Navigation Service Provider & Scheduled/NSOP/General Aviation for the requirements to be followed in respect of Aeronautical Telecommunications – Secondary Surveillance Radar

## 1. DEFINITIONS

**Airborne Collision Avoidance System (ACAS**).An aircraft system based on secondary surveillance radar (SSR) transponder signals which operate independently of ground-based equipment to provide advice to the pilot on potential conflicting aircraft that are equipped with SSR transponders.

*Note.— SSR transponders referred to above are those operating in Mode C or Mode S. ACAS may also use automatic dependent surveillance — broadcast (ADS-B) signals received from other aircraft to improve its performance.*

***Automatic Dependent Surveillance-Broadcast (ADS-B) OUT.*** A function on an aircraft or vehicle that periodically broadcasts its state vector (position and velocity) and other information derived from on-board systems in a format suitable for ADS-B IN capable receivers.

***Automatic Dependent Surveillance-Broadcast (ADS-B) IN.*** A function that receives surveillance data from ADS-B OUT data sources.

**Aircraft address**. A unique combination of twenty-four bits available for assignment to an aircraft for the purpose of air-ground communication, navigation and surveillance.

**Collision avoidance logic**. The sub-system or part of ACAS that analyses data relating to an intruder and own aircraft, decides whether or not advisories are appropriate and, if so, generates the advisories. It includes the following functions: range and altitude tracking, threat detection and RA generation. It excludes surveillance.

**Human Factors principles**. Principles which apply to design, certification, training, operations and maintenance and which seek safe interface between the human and other system components by proper consideration to human performance.

**Lost C2 Link state.** The state of the RPAS in which the C2 Link performance has degraded, as a result of a C2 Link interruption that is longer than the lost C2 Link decision time, to a point where it is not sufficient to allow the remote pilot to actively manage the flight in a safe and timely manner.

**Matching Interrogator Identifier (II) code.** II code whose binary format in the interrogator code (IC) field is the same as the binary format in the IC field of the surveillance identifier (SI) code.

**Matching Surveillance Identifier (SI) code.** SI code whose binary format in the IC field is the same as the binary format in the IC field of the interrogator identifier (II) code.

**Runway Transition Zone.** A zone of a rectangular box exactly enclosing a runway in the horizontal direction and extending to 100 feet altitude above ground level.

**Secondary surveillance radar (SSR).** A surveillance radar system which uses transmitters/receivers (interrogators) and transponders.

**Surveillance radar**. Radar equipment used to determine the position of an aircraft in range and azimuth.

**Transponder occupancy.** A state of unavailability of the transponder from the time it detects an incoming signal that appears to cause some action or from the time of a self-initiated transmission, to the time that it is capable of replying to another interrogation.

*Note.— Signals from various systems that contribute to transponder occupancy are described in the* Aeronautical Surveillance Manual *(Doc 9924), Appendix M.*

## 2. GENERAL

### 2.1 SECONDARY SURVEILLANCE RADAR(SSR)

### 2.1.1 General requirement

**2.1.1.1** When SSR is installed and maintained in operation as an aid to air traffic services, it shall conform with the provisions of 3.1 unless otherwise specified in this para 2.1.

*Note.— As referred to in this CAR, Mode A/C transponders are those which conform to the characteristics prescribed in 3.1.1. Mode S transponders are those which conform to the characteristics prescribed in 3.1.1 and 3.1.2. The functional capabilities of Mode A/C transponders are an integral part of those of Mode S transponders.*

### 2.1.2 Interrogation modes (ground-to-air)

**2.1.2.1** Interrogation for air traffic services shall be performed on the modes described in 3.1.1.4.3 or 3.1.2. The uses of each mode shall be as follows:

1) **Mode A** - to elicit transponder replies for identity and surveillance.

2) **Mode C** - to elicit transponder replies for automatic pressure-altitude transmission and surveillance.

**3) Intermode–**

*Mode A/C-only all-call:* to elicit replies for surveillance of Mode A/C transponders. Mode S transponders do not reply.

**4) Mode S–**

a) Mode S-only all-call: to elicit replies for acquisition of Mode S transponders.

b) Broadcast: to transmit information to all Mode S transponders. No replies are elicited.

c) Selective: for surveillance of, and communication with, individual Mode S transponders. For each interrogation, a reply is elicited only from the transponder uniquely addressed by the interrogation.

**2.1.2.1.1** Coordination with appropriate national and international authorities for the implementation aspects of the SSR system which will permit its optimum use shall be affected.

**2.1.2.1.2** The assignment of interrogator identifier (II) codes, where necessary in areas of overlapping coverage, across international boundaries of flight

information regions, shall be the subject of regional air navigation agreements.

**2.1.2.1.3** The assignment of surveillance identifier (SI) codes, where necessary in areas of overlapping coverage, shall be the subject of regional air navigation agreements.

**2.1.2.2** Mode A and Mode C interrogations shall be provided.

**2.1.2.2.1** Interrogators commissioned on or after 1 January 2030 shall also comply with the Mode A and C interrogator requirements specified in 3.1.1.5.2.2 and 3.1.1.8.2.2.

**2.1.2.3** In areas where improved aircraft identification is necessary to enhance the effectiveness of the ATC system, SSR ground facility having Mode S features shall include aircraft identification capability.

### 2.1.2.4 SIDE-LOBE SUPPRESSION CONTROLINTERROGATION

**2.1.2.4.1** Side-lobe suppression shall be provided in accordance with the provisions of 3.1.1.4 and 3.1.1.5 on all Mode A and Mode C interrogations.

**2.1.2.4.2** Side-lobe suppression shall be provided in accordance with the provisions of 3.1.2.1.5.1.2.3 on all Mode A/C-only all-call interrogations.

**2.1.2.4.3** Side-lobe suppression shall be provided in accordance with the provisions of 3.1.2.1.5.2.1 on all Mode S-only all-call interrogations.

### 2.1.3 Transponder reply modes (air-to-ground)

**2.1.3.1** Transponders shall respond to Mode A interrogations in accordance with the provisions of 3.1.1.7.12.1 and to Mode C interrogations in accordance with the provisions of 3.1.1.7.12.2.

**2.1.3.1.1** The pressure altitude reports contained in Mode S replies shall be derived as specified in 3.1.1.7.12.2.

**2.1.3.2** Where the need for Mode C automatic pressure-altitude transmission capability within a specified airspace has been determined, transponders, when used within the airspace concerned, shall respond to Mode C interrogations with pressure-altitude encoding in the information pulses.

**2.1.3.2.1** All transponders, regardless of the airspace in which they will be used, shall respond to Mode C interrogations with pressure-altitude information.

**2.1.3.2.2** For aircraft with 7.62 m (25 ft) or better pressure altitude sources, the pressure-altitude information provided by Mode S transponders in response to selective interrogations (i.e. in the AC field, 3.1.2.6.5.4) should be

reported in 7.62 m (25 ft) increments.

**2.1.3.2.3** All Mode A/C transponders installed on or after 1 January 1992 shall report pressure-altitude encoded in the information pulses in Mode C replies.

**2.1.3.2.4** All Mode S transponders installed on or after 1 January 1992 shall report pressure-altitude encoded in the information pulses in Mode C replies and in the AC field of Mode S replies.

**2.1.3.2.5** All Mode S transponder equipped aircraft with 7.62 m (25 ft) or better pressure altitude sources shall report pressure altitude encoded in 7.62 m (25 ft) increments in the AC field of Mode S replies.

**2.1.3.2.6** When a Mode S transponder reports altitude in 7.62 m (25 ft) increments, the reported value of the altitude shall be the value obtained by expressing the measured value of the uncorrected pressure altitude of the aircraft in 7.62m (25 ft) increments.

*Note.—This requirement relates to the installation and use of the Mode S transponder. The purpose is to ensure that altitude data obtained from a 30.48m (100ft) increment source are not reported using the formats intended for 7.62 m (25 ft) data.*

**2.1.3.3** Transponders used within airspace where the need for Mode S airborne capability has been determined shall also respond to intermode and Mode S interrogations in accordance with the applicable provisions of 3.1.2.

**2.1.3.3.1** Requirements for mandatory carriage of SSR Mode S transponders shall be on the basis of regional air navigation agreements which shall specify the airspace and the airborne implementation time scales.

**2.1.3.3.2** The agreements indicated in 2.1.3.3.1 shall provide at least five years' notice.

### 2.1.4 Mode A reply codes (information pulses)

**2.1.4.1** All transponders shall be capable of generating 4 096 reply codes conforming to the characteristics given in3.1.1.6.2.

**2.1.4.1.1** ATS Provider shall establish the procedures for the allotment of SSR codes in conformity with Regional Air Navigation agreements, taking into account other users of the system.

**2.1.4.2** The following Mode A codes shall be reserved for special purposes:

**2.1.4.2.1** Code 7700 to provide recognition of an aircraft in an emergency.

**2.1.4.2.2** Code 7600 to provide recognition of an aircraft with radio communication failure.

**2.1.4.2.3** Code 7500 to provide recognition of an aircraft which is being subjected to

unlawful interference.

**2.1.4.2.4** Code 7400 to provide recognition of a remotely piloted aircraft system (RPAS) in a lost C2 Link state.

**2.1.4.3** Appropriate provisions shall be made in ground decoding equipment to ensure immediate recognition of Mode A codes 7400, 7500, 7600 and7700.

**2.1.4.4** Mode A code 0000 shall be reserved for allocation subject to regional agreement, as a general purpose code.

**2.1.4.5** Mode A code 2000 shall be reserved to provide recognition of an aircraft which has not received any instructions from air traffic control units to operate the transponder.

### 2.1.5 Mode S airborne equipment capability

**2.1.5.1** Transponder levels. All Mode S transponders shall confirm to one of the following five levels:

*Note. — The transponder used. for a Mode S site monitor may differ from the requirements defined for a normal Mode S transponder. For example, it may be necessary to reply to all-call interrogations when the effective air/ground state is "on-the-ground".. For more details see* Aeronautical Surveillance Manual *(Doc 9924) Appendix D.*

**2.1.5.1.1** Level1 transponders

**2.1.5.1.2.1** Level1 transponders shall have the capabilities prescribed for:

a) Mode A identity and Mode C pressure-altitude reporting(3.1.1);

b) intermode and Mode S all-call transactions(3.1.2.5);

c) addressed surveillance altitude and identity transaction (3.1.2.6.1, 3.1.2.6.3, 3.1.2.6.5 and 3.1.2.6.7);

d) lockout protocols(3.1.2.6.9);

e) basic data protocols except both data link capability reporting (3.1.2.6.10.2.2) and basic dataflash protocol (3.1.2.6.10.3);

f) air - air service and squitter transactions (3.1.2.8) and

g) system characteristics of the SSR Mode S transponder (3.1.2.10) as applicable to the transponder level.

**2.1.5.1.2** Level 2 transponders –

**2.1.5.1.2.1** Level 2 transponders shall have the capabilities of 2.1.5.1.1 and also those prescribed for:

a) standard length communications (Comm-B) (3.1.2.6.6, 3.1.2.6.8,

3.1.2.6.11.2 and 3.1.2.6.11.4);

b) data link capability reporting(3.1.2.6.10.2.2);

c) aircraft identification reporting (3.1.2.9)and

d) SI code capability and operation (3.1.2.3.2.1.4, 3.1.2.5.2.1, 3.1.2.6.1.3, 3.1.2.6.1.4.1, 3.1.2.6.9.1.1 and 3.1.2.6.9.2).

**2.1.5.1.2.2** Level 2 transponders with Comm-A capability. Level 2 transponders with Comm-A capability shall have the capabilities of 2.1.5.1.2.1 and those prescribed for Comm-A standard length communication described in 3.1.2.6.2, 3.1.2.6.4 and 3.1.2.6.11.1.

**2.1.5.1.2.3** Level 2 transponders with Air-initiated Comm-B capability. Level 2 transponders with Air-initiated Comm-B capability shall have the capabilities of 2.1.5.1.2.1 and those prescribed for Air-initiated Comm-B standard length communication described in 3.1.2.6.11.3.

**2.1.5.1.2.4** Level 2 transponders with basic dataflash capability. Level 2 transponders with basic dataflash capability shall have the capabilities of 2.1.5.1.2.1 and also those prescribed for basic dataflash described in 3.1.2.6.10.3

**2.1.5.1.3** Level 3 transponders

**2.1.5.1.3.1** Level 3 - Level 3 transponders shall have the capabilities of 2.1.5.1.2.1, 2.1.5.1.2.2, 2.1.5.1.2.3 and those prescribed for ground-to-air extended length message (ELM) communications (3.1.2.7.1 to 3.1.2.7.5).

**2.1.5.1.4** Level 4 transponders-

**2.1.5.1.4.1** Level 4 transponders shall have the capabilities of 2.1.5.1.3 and also those prescribed for air-to-ground extended length message (ELM) communications (3.1.2.7.7 and 3.1.2.7.8).

**2.1.5.1.5** Level 5 transponders-

**2.1.5.1.5.1** Level 5 transponders shall have the capabilities of 2.1.5.1.4 and also those prescribed for enhanced Comm-B and extended length message (ELM) communications (3.1.2.6.11.3.4, 3.1.2.7.6 and 3.1.2.7.9).

**2.1.5.1.6** **Extended squitter** - Extended squitter transponders shall have the capabilities of 2.1.5.1.2, 2.1.5.1.3, 2.1.5.1.4 or 2.1.5.1.5 and also those prescribed for extended squitter operation (3.1.2.8.6). Transponders with this capability shall be designated with a suffix“e”.

*Note.— For example, a Level 2 transponder with extended squitter capability would be designated “Level 2e”.*

**2.1.5.1.7** Extended squitter non-transponder devices. Devices that are capable of broadcasting extended squitters that are not part of a Mode S transponder shall conform to all of the 1090 MHz RF signals in space requirements specified for a Mode S transponder, except

for transmit power levels for the identified equipment class as specified in 5.1.1.

**2.1.5.2** Mode S transponder minimum capability

**2.1.5.2.1** All Mode S transponders used by international civil air traffic shall conform, at least, to the requirements of Level 2 transponders prescribed in 2.1.5.1.2.1

**2.1.5.2.2 Recommendation**.— It is to be ensured that that Level 1 transponders are not used in areas where SI codes are used

**2.1.5.2.3** All Mode S transponders shall maintain the alert condition if the Mode A identity code is changed to one of the Mode A codes of set 1 defined in 3.1.2.6.10.1.1.1, a).

**2.1.5.3** Mode S transponders installed on aircraft with gross mass in excess of 5700 kg or a maximum cruising true air speed capability in excess of 463 km/h (250 kt) shall operate with antenna diversity as prescribed in 3.1.1.7.18 and 3.1.2.10.4 if:

a) the aircraft individual certificate of airworthiness is first issued on or after 1 January 1990;or

b) Mode S transponder carriage is required on the basis of regional air navigation agreement in accordance with 2.1.3.3.1 and 2.1.3.3.2.

*Note.— Aircraft with maximum cruising true airspeed exceeding 324 km/h (175 kt) are required to operate with a peak power of not less than 21.0 dBW as specified in3.1.2.10.2 c).*

**2.1.5.4 TRANSPONDER CAPABILITY-REQUIRED AT SPECIFIC DATES**

**2.1.5.4.1** All Mode S transponders certified on or after 1 January 1999 shall recover sensitivity to within 3 dB of minimum triggering level (MTL) no later than 45 microseconds after receipt of the sync phase reversal following a Mode S interrogation that is not accepted (3.1.2.4.1.2) or that is accepted but requires no reply.

**2.1.5.4.2** Transponder designs first certified on or after 1 January 2011 shall have the spurious Mode A/C reply protection capability as specified in 3.1.1.7.8.5.2.

**2.1.5.4.3** Mode S Level 2 transponders certified on or after 1 January 2020 shall have data parity with overlay control as specified in 3.1.2.6.11.2.5.

**2.1.5.4.4** All Mode S transponders certified on or after 1 January 2020 shall not reply to Mode A/C/S all-call interrogations defined in 3.1.2.1.5.1.1.

**2.1.5.4.5** Mode S transponders certified on or after 1 January 2030 shall not accept the type control subfield (TCS), rate control subfield (RCS), or surface antenna subfield (SAS) commands received when DI = 2.

**2.1.5.4.6** Mode S transponders certified on or after 1 January 2030 shall maintain the alert condition if the Mode A identity code is changed to one of the codes of set 2 defined in 3.1.2.6.10.1.1.1, b).

**2.1.5.4.7** Mode S transponders certified on or after 1 January 2030 shall not set to zero in bit 33 of the data link capability report when aircraft identification cannot be updated within 8 seconds (see 3.1.2.6.10.2.2.3)

**2.1.5.4.8** Mode S transponders certified on or after 1 January 2030 shall not set to zero for the aircraft identification upon the loss of the interface providing aircraft identification (see 3.1.2.9.1.4).

**2.1.5.4.9** Transponders certified on or after 1 January 2030 shall have their RF output power as specified in 3.1.1.7.17.2 and 3.1.2.10.2.1.2.

**2.1.5.4.10** **Recommendation.—** *Transmitters used to replace defective obsolete transmitters in transponders should meet the requirement defined in 3.1.1.7.17.2.1 and 3.1.2.10.2.1.2.1*

**2.1.5.4.11** Transponders certified on or after 1 January 2030 shall have an improved dead time as specified in 3.1.1.7.3.2 and 3.1.2.10.3.2.2.

**2.1.5.4.12** Mode S transponders certified on or after 1 January 2030 shall have a Mode S reply rate limiting of type 1 as specified in 3.1.2.10.3.6.1.2.

### 2.1.6 The SSR Mode S address (aircraft address)

The SSR mode S address shall be one of 16777214 twenty-four-bit aircraft addresses allocated by ICAO to the State of Registry or common mark registering authority and assigned as prescribed in 3.1.2.4.1.2.3.1.1and the Appendix 'A'

### 2.1.7 Transponder occupancy

Note.— See Appendix M of the Aeronautical Surveillance Manual (Doc 9924) for guidance on consistent modelling of transponder occupancy

### 2.1.8 1 090 MHz receiver

**2.1.8.1.1** ***Decoding of 1 090 MHz messages :*** 1 090 MHz receivers produced on or after 1 January 2030 shall be capable of decoding messages transmitted by transponders compliant with the active state transponder output power specified in 3.1.1.7.17.2 and 3.1.2.10.2.1.2.

**2.1.8.1.2** Recommendation.— **1 090 MHz receivers produced before 1 January 2030 should be capable of decoding messages transmitted by transponders compliant with the active state transponder output power specified in 3.1.1.7.17.2 and 3.1.2.10.2.1.2.**

### 2.1.9 Mode S interrogator capability

**2.1.9.1** Mode S interrogators shall comply with the requirements defined in 3.1.1 and 3.1.2.

**2.1.9.2** Mode S interrogators shall not use Mode A/C/S all-call interrogations.

*Note.— The use of Mode A/C/S all-call interrogations does not allow the use of stochastic lockout override and therefore might not ensure a sufficient probability of acquisition in areas of high density of flights or when other interrogators lockout transponder on II = 0 for supplementary acquisition.*

#### 2.1.9.3 II/SI code operation

**2.1.9.3.1** Mode S ground station using an SI code shall:

a) acquire Mode S II-only transponders on the matching II code;

b) selectively interrogate Mode S II-only transponders on the matching II code; and

c) not lockout Mode S II-only transponders when ground stations with overlapping coverage are assigned matching II or SI codes.

*Note 1.— A table of matching II/SI codes can be found in Doc 9924, Appendix H.*

*Note 2.— Mode S II/SI capable transponders support both II and SI codes. Only locking out Mode S II/SI capable transponders means the legacy Mode S II-only transponders are not in a lockout condition and can be acquired by other Mode S ground stations using the matching II code. The suppression of lockout for Mode S II-only transponder is only used when there is overlapping coverage with a ground station using a matching II or SI code, as it is important to use lockout to reduce RF transmissions*

**2.1.9.3.2 Recommendation.—** *Mode S II/SI capable interrogator using an II code should be configurable to only lockout Mode S II/SI capable transponders.*

*Note 1.— This mode of operation is used when matching SI codes are used by overlapping interrogators.*

*Note 2.— A matching SI code is an SI code whose binary format in the IC field is the same as the binary format in the IC field of the II code. Each Mode S II code has four "matching" SI codes. A table of matching II/SI codes can be found in Doc 9924, Appendix H.*

*Note 3.— This recommendation is to make possible the assignment of matching II codes to Mode S interrogators in areas in which not all transponders are SI code capable and where a matching SI code is assigned.*

*Note 4.— This recommendation is not necessary if a monitoring programme has demonstrated that all transponders are SI code capable or if SI codes do not need to be used in the ICAO Region. More information on the use of this capability to make possible the assignment of SI codes can be found in Doc 9924, Appendix J.*

## 2.2 HUMAN FACTORS CONSIDERATIONS

Human Factors principles shall be observed in the design and certification of surveillance radar, transponder and collision avoidance systems.

### 2.2.1 Operation of controls

**2.2.1.1** Transponder controls which are not intended to be operated in flight shall not be directly accessible to the flight crew.

**2.2.1.2 Recommendation.—** The operation of transponder controls, intended for use during flight, should be evaluated to ensure they are logical and tolerant to human error. In particular, where transponder functions are integrated with other system controls, the manufacturer should ensure that unintentional transponder mode switching (i.e. an operational state to 'STANDBY' or 'OFF') is minimized.

*Note.— This may take the form of a confirmation of mode switching, required by the flightcrew.Typically'LineSelect'Keys,'TouchScreen'or'CursorControlled/Tracker- ball' methods used to change transponder modes should be carefully designed to minimize flight crew error.*

**2.2.1.3 Recommendation.—** The flight crew should have access at all times to the information of the operational state of the transponder.

*Note.—Information on the monitoring of the operational state of the transponder is provided in* RTCA DO-181 F, Minimum Operational Performance Standards for Air Traffic Control Radar Beacon System/ Mode Select (ATCRBS/Mode S) Airborne Equipment, *and in* EUROCAE ED-73F, Minimum Operational Performance Standards (MOPS) for Secondary Surveillance Radar Mode S Transponders. ,

### 2.3 Interference Tolerance Criterion

**2.3.1** Aeronautical surveillance and collision avoidance system receivers defined in this volume utilizing the 1 030 and/or 1 090 MHz channels shall be able to meet their performance requirements under an average interference power to average noise power level ratio of no more than minus 10 dB.

*Note 1.— Interference levels above this level may be harmful to the intended operation of the systems in this volume. This would apply to the combination of all non-pulsed interference sources present. Pulsed interference sources or sources with less than 100 per cent operational duty cycle need to be evaluated on a case-by-case basis. Compatibility between standardized systems in this Annex may be evaluated on a case-by-case basis, and interference mitigations may be used which are only available to standardized systems in this Annex.*

*Note 2.— The interference can be treated as additive noise such that interference 10 dB below a receiver's baseline noise floor generates 0.4 dB of additive noise.*

*Note 3.— Additional information on application of this interference tolerance criterion and means of compliance can be found in Doc 9924.*

---

## 3. SURVEILLANCE SYSTEMS

## 3.1 SECONDARY SURVEILLANCE RADAR (SSR) SYSTEM CHARACTERISTICS

*Note 1.— Section 3.1.1 prescribes the technical characteristics of SSR Mode A and Mode C capabilities. Section 3.1.2 prescribes the characteristics of Mode S capabilities. Table 3-11 provides a summary of the interrogation signal details. Chapter 5 prescribes additional requirements on Mode S extended squitters.*

*Note 2. — Systems using Mode S capabilities are generally used for air traffic control surveillance systems. In addition, certain ATC applications may use Mode S emitters, e.g. for vehicle surface surveillance or for fixed target detection on surveillance systems. Under such specific conditions, the term "aircraft" can be understood as "aircraft or vehicle (A/V)". While those applications may use a limited set of data, any deviation from standard physical characteristics must be considered very carefully by the appropriate authorities. They must take into account not only their own surveillance (SSR) environment but also possible effects on other systems like ACAS.*

*Note 3.— Non-Standard-International alternative units are used as permitted by CAR Section 1 Series 'B' Part I.*

### 3.1.1 Mode A and Mode C capabilities

*Note 1.— In this section, SSR modes are designated by letters A and C. Suffixed letters, e.g. A2, C4, are used to designate the individual pulses used in the air-to- ground pulse trains. This common use of letters is not to be construed as implying any particular association of modes and codes.*

### 3.1.1.1 INTERROGATION AND CONTROL (INTERROGATION SIDE-LOBE SUPPRESSION) RADIO FREQUENCIES (GROUND-TO-AIR)

**3.1.1.1.1** The carrier frequency of the interrogation and control transmissions shall be 1030MHz.

**3.1.1.1.2** The frequency tolerance shall be plus or minus 0.2 MHz.

**3.1.1.1.3** The carrier frequencies of the control transmission and of each of the interrogation pulse transmissions shall `not differ from each other by more than 0.2MHz.

### 3.1.1.2 REPLY CARRIER FREQUENCY (AIR-TO-GROUND)

**3.1.1.2.1** The carrier frequency of the reply transmission shall be 1090MHz.

**3.1.1.2.2** The frequency tolerance shall be plus or minus 1 MHz.

### 3.1.1.3 POLARIZATION

Polarization of the interrogation, control and reply transmissions shall be predominantly vertical.

### 3.1.1.4 INTERROGATION MODES (SIGNALS-IN-SPACE)

*Table 3-11 provides a summary of the interrogation signal details.*

**3.1.1.4.1** The interrogation shall consist of two transmitted pulses designated P1 and P3. A control pulse P2 shall be transmitted following the first interrogation pulse P1.

**3.1.1.4.2** Interrogation Modes A and C shall be as defined in 3.1.1.4.3.

**3.1.1.4.3** The interval between P1 and P3 shall determine the mode of interrogation and shall be as follows:

| | |
|---|---|
| Mode A | 8 ±0.18 microseconds |
| Mode C | 21 ±0.18 microseconds |

**3.1.1.4.4** The interval between P1 and P2 shall be 2.0 plus or minus 0.1 microseconds.

**3.1.1.4.5** The duration of pulses P1, P2 and P3 shall be 0.8 plus or minus 0.09 microseconds.

**3.1.1.4.6** The rise time of pulses P1, P2 and P3 shall be between 0.05 and 0.1 microseconds.

**3.1.1.4.7** The decay time of pulses P1, P2 and P3 shall be between 0.05 and 0.2 microseconds.

**3.1.1.5 INTERROGATOR AND CONTROL TRANSMISSION CHARACTERISTICS (INTERROGATION SIDE-LOBE SUPPRESSION-SIGNALS-IN-SPACE)**

**3.1.1.5.2** The radiated amplitude of P2 shall be:

a) equal to or greater than the radiated amplitude of P1 from the side-lobe transmissions of the antenna radiating P1;and

b) at a level lower than 9dB below the radiated amplitude of P1,within the desired arc of interrogation.

**3.1.1.5.2** Within the desired beam width of the directional interrogation (main lobe), the radiated amplitude of P3 shall comply with 3.1.1.5.2.1 or 3.1.1.5.2.2 .

3.1.1.5.2.1 For interrogator commissioned before 1 January 2030, the radiated amplitude of P3 shall be within 1 dB of the radiated amplitude of P1.

3.1.1.5.2.2 For interrogator commissioned on or after 1 January 2030, the radiated amplitude of P3 shall be within 0.5 dB of the radiated amplitude of P1.

3.1.1.5.3 One or two control pulses (P2 alone, or P1 and P2) shall be transmitted using a separate antenna pattern to suppress responses from aircraft in the side lobes of the interrogator antenna.

Note.— When using control pulses P1 and P2, separate RF paths are used for the interrogation P1 pulse and the control P1 pulse. The pulse characteristics and timing for both P1 pulses are given in 3.1.1.4. Further details on the use of control pulses can be found in Doc 9924.

**3.1.1.6 REPLY TRANSMISSION CHARACTERISTICS (SIGNALS-IN-SPACE)**

**3.1.1.6.1 Framing pulses**. The reply function shall employ a signal comprising two framing pulses spaced 20.3 microseconds as the most elementary code.

**3.1.1.6.2** *INFORMATION PULSES*

**3.1.1.6.2.1** Information pulses shall be spaced in increments of 1.45 microseconds from the first framing pulse. The designation and position of these information pulses shall be as follows:

| Pulses | Position (microseconds) |
|---|---|
| C1 | 1.45 |
| A1 | 2.90 |
| C2 | 4.35 |
| A2 | 5.80 |
| C4 | 7.25 |
| A4 | 8.70 |
| X | 10.15 |
| B1 | 11.60 |
| D1 | 13.05 |

| | |
|---|---|
| B2 | 14.50 |
| D2 | 15.95 |
| B4 | 17.40 |
| D4 | 18.85 |

*Note.— The Standard relating to the use of these pulses is given in 2.1.4.1. Information on the "X" pulse is contained in the* Aeronautical Surveillance Manual *(Doc 9924)*

**3.1.1.6.2.2** The position of the X pulse shall not be used in replies to Mode A or Mode C interrogations if the safe operation of surveillance systems cannot be maintained.

**3.1.1.6.2.3** INTENTIONALLY LEFT BLANK

**3.1.1.6.3** **Special position identification pulse** In addition to the information pulses provided, a special position identification pulse shall be transmitted but only as a result of manual (pilot) selection. When transmitted, it shall be spaced at an interval of 4.35 microseconds following the last framing pulse of Mode A replies only.

**3.1.1.6.4** **Reply pulse shape**. All reply pulses shall have a pulse duration of 0.45 plus or minus 0.1 microsecond, a pulse rise time between 0.05 and 0.1 microsecond and a pulse decay time between 0.05 and 0.2 microsecond. The pulse amplitude variation of one pulse with respect to any other pulse in a reply train shall not exceed 1dB.

**3.1.1.6.5** **Reply pulse position tolerances**. The pulse spacing tolerance for each pulse (including the last framing pulse) with respect to the first framing pulse of the reply group shall be plus or minus 0.10 microseconds. The pulse interval tolerance of the special position identification pulse with respect to the last framing pulse of the reply group shall be plus or minus 0.10microsecond.Thepulse spacing tolerance of any pulse in the reply group with respect to any other pulse (except the first framing pulse) shall not exceed plus or minus 0.15microsecond.

**3.1.1.6.6** **Code nomenclature**. The code designation shall consist of digits between 0 and 7 inclusive, and shall consist of the sum of the subscripts of the pulse numbers given in 3.1.1.6.2 above, employed as follows:

| **Digit** | **Pulse Group** |
|---|---|
| First(most significant) | A |
| Second | B |
| Third | C |
| Fourth | D |

### 3.1.1.7 TECHNICAL CHARACTERISTICS OF TRANSPONDERS WITH MODE A AND MODE C CAPABILITIESONLY

**3.1.1.7.1 Reply.** The transponder shall reply (not less than 90 percent triggering) when all of the following conditions have been met:

a) the received amplitude of P3 is within plus or minus 1 dB of the received amplitude of P1;

b) either no pulse is received in the interval 1.3 microseconds to2.7 microseconds after P1, or P1 exceeds by more than 9 dB any pulse received in this interval;

c) the received amplitude of a proper interrogation is more than 10 dB above the received amplitude of random pulses where the latter are not recognized by the transponder as P1, P2 or P3.

d) the interval between P1 and P3 is 8 plus or minus 0.2 microsecond (Mode A), or 21 plus or minus 0.2 microsecond (Mode C); and

e) the duration of P1 and P3 is 0.8 plus or minus 0.1 microsecond.

**3.1.1.7.2** The transponder shall not reply under the following conditions:

a) to interrogations when the interval between pulses P1 and P3 differs from those specified in 3.1.1.4.3 by more than plus or minus 1.0 microsecond;

b) upon receipt of any single pulse which has no amplitude variations approximating a normal interrogation condition.

**3.1.1.7.3 Dead time**.

**3.1.1.7.3.1** For all transponders, the time interval beginning at the end of a reply transmission and ending when the receiver has regained sensitivity to within 3 dB of MTL (dead time) shall not exceed 125 microseconds.

**3.1.1.7.3.2** For transponders with improved dead time, the time interval beginning at the end of a reply transmission and ending when the receiver has regained sensitivity to within 3 dB of MTL (dead time) shall not exceed 20 microseconds..

**3.1.1.7.4 SUPPRESSION**

**3.1.1.7.4.1** The transponder shall be suppressed when the received amplitude of P2 is equal to, or in excess of, the received amplitude of P1 and spaced 2.0 plus or minus 0.15 microseconds. The detection of P3 is not required as a prerequisite for initiation of suppression action.

**3.1.1.7.4.2** The transponder suppression shall be for a period of 35 plus or minus 10microseconds.

**3.1.1.7.4.2.1** The suppression shall be capable of being reinitiated for the full duration within 2 microseconds after the end of any suppression period.

**3.1.1.7.4.3** Suppression in presence of $S_1$ pulse

*Note:- The S1 pulse is used in a technique employed by ACAS known as "whisper-shout" to facilitate ACAS surveillance of Mode A/C aircraft in higher traffic densities. The whisper-shout technique is explained in the Airborne Collision Avoidance System (ACAS) Manual (doc 9863).*

When an $S_1$ pulse is detected 2.0 plus or minus 0.15 microseconds before the P1 of a Mode A or Mode C interrogation:

a) with *S1* and *P1* above MTL, the transponder shall be suppressed as specified in3.1.1.7.4.1;with *P1* at MTL and *S1* at MTL, the transponder shall be suppressed and shall reply to no more than 10 per cent of Mode A/C interrogations;

b) with *P1* at MTL and *S1* at MTL -3 dB, the transponder shall reply to Mode A/C interrogations at least 70 per cent of the time; and

c) with *P1* at MTL and *S1* at MTL -6 dB, the transponder shall reply to Mode A/C interrogations at least 90 per cent of the time.

*Note 1.— The suppression action is because of the detection of S1 and P1 and does not require detection of a P2 or P3 pulse.*

*Note 2.— S1 has a lower amplitude than P1. Certain ACAS use this mechanism to improve target detection (4.3.7.1).*

*Note 3.— These requirements also apply to a Mode A/C only capable transponder when an S1 precedes an intermode interrogation (2.1.2.1).*

**3.1.1.7.5 RECEIVER SENSITIVITY AND DYNAMICRANGE**

**3.1.1.7.5.1** The minimum triggering level of the transponder shall be such that replies are generated to at least 90 per cent of the interrogation signals when:

a) the two pulses P1 and P3 constituting an interrogation are of equal amplitude and P2 is not detected; and

b) the amplitude of these signals is nominally 73 dB below 1mW, with limits between 69 dB and 77 dB below 1mW.

**3.1.1.7.5.2** The reply and suppression characteristics shall apply over received amplitude of P1 between minimum triggering level and 50dB above that level.

**3.1.1.7.5.3** The variation of the minimum triggering level between modes shall not exceed 1 dB for nominal pulse spacing and pulse widths.

**3.1.1.7.6** **Pulse duration discrimination**. Signals of received amplitude between minimum triggering level and 45 dBm , and consisting of P1 and/or P3

with a duration less than 0.3 microseconds, shall not cause the transponder to initiate reply or suppression action more than 10 percent of the time. With the exception of single pulses with amplitude variations approximating an interrogation, any single pulse of duration more than 1.5 microseconds shall not cause the transponder to initiate reply or suppression action more than 10 per cent of the time over the signal amplitude range of minimum triggering level (MTL) to 50 dB above that level.

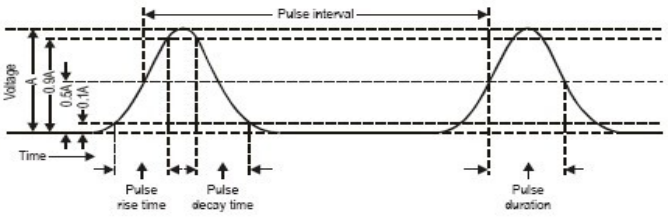


Definitions

*Phase reversal*. A 180-degree change in the phase of the radio frequency carrier.

*Phase reversal duration*. The time between the 10-degree and 170-degree points of a phase reversal.

*Pulse amplitude A*. The peak voltage amplitude of the pulse envelope.

*Pulse decay time*. The time between 0.9A and 0.1A on the trailing edge of the pulse envelope.

*Pulse duration*. The time interval between 0.5A points on leading and trailing edges of the pulse envelope.

*Pulse interval*. The time interval between the 0.5A point on the leading edge of the first pulse and the 0.5A point on the leading edge of the second pulse.

*Pulse rise time*. The time between 0.1A and 0.9A on the leading edge of the pulse envelope.

*Time intervals*. The intervals are referenced to:

a) the 0.5A point on the leading edge of a pulse;
b) the 0.5A point on the trailing edge of a pulse; or
c) the 90-degree point of a phase reversal.

*Transponder sensitivity and power reference point*. The antenna end of the transmission line of the transponder.

**Figure 3-1. Definitions of secondary surveillance radar waveform shapes, Intervals and the reference point for sensitivity and power.**

**3.1.1.7.7** **Echo suppression and recovery**. The transponder shall contain an echo suppression facility designed to permit normal operation in the presence of echoes of signals-in-space. The provision of this facility shall be compatible with the requirements for suppression of side lobes given in3.1.1.7.4.1.

**3.1.1.7.7.1** **Desensitization**. Upon receipt of any pulse more than 0.7 microsecond in duration, the receiver shall be desensitized by an amount that is within at least 9 dB of the amplitude of the desensitizing pulse but shall at no time exceed the amplitude of the desensitizing pulse with, the exception of possible overshoot during the first microsecond following the desensitizing pulse.

**3.1.1.7.7.2** **Recovery**. Following desensitization, the receiver shall recover sensitivity (within 3 dB of minimum triggering level) within 15 microseconds after reception of a desensitizing pulse having signal strength up to 50 dB above minimum triggering level. Recovery shall be

at an average rate not exceeding 4.0 dB per microsecond.

**3.1.1.7.8** SPURIOUS EMISSIONS AND SPURIOUS RESPONSES

**3.1.1.7.8.1** Equipment random triggering rate. In the absence of valid interrogation signals,transponders shall not generate more than 5 unwanted Mode A or Mode C replies per second as integrated over an interval of at least 30 seconds.

**3.1.1.7.8.2** **Installed random triggering rate**. In the absence of valid interrogation signals, transponders shall not generate more than 30 unwanted Mode A or Mode C replies per second as integrated over an interval of at least 30 seconds, This installed random triggering rate shall not be exceeded when all possible interfering equipment installed in the same aircraft are operating at maximum interference levels.

**3.1.1.7.8.3** Random triggering rate in the presence of low-level in-band continuous wave (CW) interference. The total random trigger rate on all Mode A and/or Mode C replies shall not be greater than 10 reply pulse groups or suppressions per second, averaged over a period of 30 seconds, when operated in the presence of non-coherent CW interference at a frequency of 1 030 ±0.2 MHz and a signal level of –60 dBm or less.

**3.1.1.7.8.4 SPURIOUS RADIATION**

**3.1.1.7.8.4.1** Recommendation.— CW radiation should not exceed 70 dB below 1 W for the transponder.

**3.1.1.7.8.5 SPURIOUS RESPONSES**

**3.1.1.7.8.5.1** Recommendation.— The response to signals not within the receiver pass band should be at least 60 dB below normal sensitivity.

**3.1.1.7.8.5.2** For transponders with spurious Mode A/C reply protection capability, the spurious

Mode A/C reply ratio resulting from low-level Mode S interrogations shall be no more than:

a) an average of 1 per cent in the input interrogation signal range between –81 dBm and the Mode S MTL; and

b) a maximum of 3 per cent at any given level in the input interrogation signal range between –81 dBm and the Mode S MTL.

Note 1.— For transponders that reply to Mode A/C/S all-call interrogations, failure to detect a low-level Mode S interrogation can also result in the transponder decoding a three-pulse Mode A/C/S all-call interrogation. This would result in the transponder responding with a Mode S all-call (DF = 11) reply. The above requirement will also control these DF = 11 replies since it

places a limit on the probability of failing to correctly detect the Mode S interrogation.

Note 2.— More information about issuing a type certificate for aircraft and separate design approval can be found in the Airworthiness Manual (Doc 9760).

**3.1.1.7.9 REPLY RATE**

**3.1.1.7.9.1** All transponders shall be capable of continuously generating at least 500 replies per second for a 15-pulse coded reply. Transponder installations used solely below 4 500 m (15 000 ft), or below a lesser altitude established by the appropriate authority or by regional air navigation agreement, and in aircraft with a maximum cruising true airspeed not exceeding 175kt (324km/h) shall be capable of generating at least 1 000 15-pulse coded replies per second for a duration of 100 milliseconds. Transponder installations operated above 4500m (15000 ft) or in aircraft with a maximum cruising true airspeed in excess of 175 kt (324 km/h), shall be capable of generating at least 1200 15-pulse coded replies per second for a duration of 100 milliseconds.

*Note1.—A 15-pulse reply includes 2 framing pulses, 12 information pulses, and the SPI pulse.*

*Note 2.— The reply rate requirement of 500 replies per second establishes the minimum continuous reply rate capability of the transponder. As per the altitude and speed criteria above, the 100 or 120 replies in a 100 millisecond interval defines the peak capability of the transponder. The transponder must be capable of replying to this short term burst rate, even though the transponder may not be capable of sustaining this rate. If the transponder is subjected to interrogation rates beyond its reply rate capability, the reply rate limit control of 3.1.1.7.9.2 acts to gracefully desensitize the transponder in a manner that favors closer interrogators. Desensitization eliminates weaker interrogation signals.*

**3.1.1.7.9.2** Reply rate limit control. To protect the system from the effects of transponder over-interrogation by preventing response to weaker signals when a predetermined reply rate has been reached, a sensitivity reduction type reply limit control shall be incorporated in the equipment. The limit shall be set between 500 and 2 000 Mode A/C replies per second, without regard to the number of pulses in each reply. Sensitivity reduction in excess of 3 dB shall not take effect until 90 per cent of the selected value is exceeded.

**3.1.1.7.10** **Reply delay and jitter**. The time delay between the arrival, at the transponder receiver, of the leading edge of P3 and the transmission of the leading edge of the first pulse of the reply shall be 3 plus or minus 0.5 microseconds. The total jitter of the reply pulse code group, with respect to P3, shall not exceed 0.1 microsecond for receiver input levels between 3 dB and 50 dB above minimum triggering level. Delay variations between Mode A and Mode C shall not exceed 0.2 microsecond.

### 3.1.1.7.11 TRANSPONDER POWER OUTPUT AND DUTYCYCLE

**3.1.1.7.11.1** The peak pulse power available at the antenna end of the transmission line of the transponder shall be at least 21 dB and not more than 27 dB above 1W, except that for transponder installations used solely below 4 500m (15 000 ft), or below a lesser altitude established by the appropriate authority or by regional air navigation agreement, a peak pulse power available at the antenna end of the transmission line of the transponder of at least 18.5dB and not more than 27dB above 1W shall be permitted.

**3.1.1.7.11.2** The peak pulse power specified in 3.1.1.7.11.1 shall be maintained over a range of replies from code 0000 at a rate of 400 replies per second to a maximum pulse content at a rate of 1200 replies per second or a maximum value below 1200 replies per second of which the transponder is capable.

### 3.1.1.7.12 REPLYCODES

**3.1.1.7.12.1 Identification.** The reply to a Mode A interrogation shall consist of the two framing pulses specified in 3.1.1.6.1 together with the information pulses (Mode A code) specified in3.1.1.6.2.

**3.1.1.7.12.1.1** The Mode A code shall be selected from the 4 096 codes available.

**3.1.1.7.12.2 Pressure-altitude transmission**. The reply to Mode C interrogation shall consist of the two framing pulses specified in 3.1.1.6.1 above. When digitized pressure-altitude information is available, the information pulses specified in 3.1.1.6.2 shall also be transmitted.

**3.1.1.7.12.2.1** Transponders shall be provided with means to remove the information pulses but to retain the framing pulses when the provision of 3.1.1.7.12.2.4 below is not complied with in reply to Mode C interrogation.

**3.1.1.7.12.2.2** The information pulses shall be automatically selected by an analog-to-digital converter connected to a pressure-altitude data source in the aircraft referenced to the standard pressure setting of 1013.25 hecto pascals.

**3.1.1.7.12.2.3** Pressure-altitude shall be reported in 100-ft increments by selection of pulses as shown in the Appendix to this chapter.

**3.1.1.7.12.2.4** The digitizer code selected shall correspond to within plus or minus 38.1 m (125 ft), on a 95 per cent probability basis, with the pressure-altitude information (referenced to the standard pressure setting of 1013.25 hecto pascals), used on board the aircraft to adhere to the assigned flight profile.

**3.1.1.7.13** **Transmission of the special position identification (SPI) pulse.** When required, this pulse shall be transmitted with Mode A replies, as specified in 3.1.1.6.3, for a period of between 18 plus or minus 1 seconds.

**3.1.1.7.14** **ANTENNA**

**3.1.1.7.14.1** The transponder antenna system, when installed on an aircraft, shall have a radiation pattern which is essentially omni directional in the horizontal plane.

**3.1.1.7.14.2** The vertical radiation pattern shall be nominally equivalent to that of a quarter-wave monopole on a ground plane.

**3.1.1.7.15** Simultaneous Signals. If a P1 – P2 suppression pair and a Mode A or Mode C interrogation are recognized simultaneously, the transponder shall be suppressed. An interrogation shall not be recognized as Mode A or Mode C if the transponder is in suppression (3.1.1.7.4). If a Mode A and a Mode C interrogation are recognized simultaneously, the transponder shall complete the transaction cycle as if only a Mode C interrogation had been recognized.

**3.1.1.7.16** Reply ratio in the presence of low-level in-band CW interference. In the presence of non-coherent CW interference at a frequency of 1 030 ±0.2 MHz at signal levels of 20 dB or more below the desired Mode A/C interrogation signal level, the transponder shall reply correctly to at least 90 per cent of the interrogations.

**3.1.1.7.17** **Unwanted Output Power**

**3.1.1.7.17.1** Inactive state transponder output power. When the transponder is in the inactive state, (refer to Figure 3-11), the peak power at 1 090 MHz plus or minus 3 MHz at the antenna end of the transmission line of the transponder, shall not exceed –50 dBm.

Note 1.— Inactive state transponder output power is constrained in this way to ensure that an aircraft, when located as near as 185 m (0.1 NM) to a Mode A/C or Mode S interrogator, does not cause interference to that installation.

Note 2.— Transponders with Mode S capability and installed with an ACAS unit have stricter requirements defined in 3.1.2.10.2.1.1.

**3.1.1.7.17.2** Active state transponder output power.

**3.1.1.7.17.2.1** The RF output power shall be less than or equal to the peak pulse power minus 50 dB for the interval starting 10 microseconds prior to the Mode A/C transmission and for the interval of 10 microseconds following a Mode A/C transmission.

**3.1.1.7.17.2.2** For intervals between transmitted pulses that are greater than 0.5 microsecond, the power level at the lowest point within the interval shall be 50 dB or more below the peak pulse power.

Note 1.— These power limitations protect 1 090 MHz receivers from potential missed decodes when signals are received at close range and within desired detection range. In the absence of such limits, signal levels during non-pulse intervals can occur above receiver thresholds and can lead to unintended distortion of pulse positions or false pulse decodes preventing proper detection of transmitted signals. It also makes it more difficult for receivers to decode overlapped replies.

Note 2.— The presence of a signal at a level of 50 dB or more below the peak power may not be measurable within the first 0.5 microsecond following the transmission of a pulse because of the allowed decay time. It is possible that a signal transmitted 50 dB below the peak pulse power can still affect high sensitivity receivers when transmitted in close range. More information is available in Doc 9924.

Note 3.— Information on how to verify unwanted output power can be found in RTCA/DO-181F or EUROCAE/ED-73F.

**3.1.1.7.18** **Transponder antenna system and diversity operation**. Transponders equipped for diversity operation shall have two RF ports for operation with two antennas, one antenna on the top and the other on the bottom of the aircraft's fuselage. The received signal from one of the antennas shall be selected for acceptance and the reply shall be transmitted from the selected antenna only.

**3.1.1.7.18.1** **Radiation pattern**. The radiation pattern of antennas when installed on an aircraft shall be nominally equivalent to that of a quarter-wave monopole on a ground plane.

Note.— Transponder antennas designed to increase gain at the expense of vertical beamwidth are undesirable because of their poor performance during turns.

**3.1.1.7.18.2** **Antenna location**. The top and bottom antennas shall be mounted as near as possible to the centre line of the fuselage. Antennas shall be located so as to minimize obstruction to their fields in the horizontal plane.

**3.1.1.7.18.2.1** Recommendation.— The horizontal distance between the top and bottom antennas should not be greater than 7.6 m (25 ft).

Note.— This recommendation is intended to support the operation of any diversity transponder (including cables) with any diversity antenna installation and still satisfy the requirement of 3.1.2.10.4.5.

**3.1.1.7.18.3** **Antenna selection.** Transponders equipped for diversity operation shall have the capability to evaluate a pulse sequence simultaneously received on both antenna channels to determine individually for each channel if the P1 pulse and the P3 pulse of a Mode A or Mode C

interrogation meet the requirements for Mode A and Mode C interrogations as defined in 3.1.1.

**3.1.1.7.18.3.1** If the two channels simultaneously receive a P1 – P3 pulse pair that meets the requirements for a Mode A or Mode C interrogation, the antenna at which the signal strength is greater shall be selected for the transmission of the reply.

**3.1.1.7.18.3.2** If only one channel receives a pulse pair that meets the requirements for an interrogation, or if only one channel accepts an interrogation, the antenna associated with that channel shall be selected regardless of received signal strength.

**3.1.1.7.18.3.3** Selection threshold. If antenna selection is based on signal level, it shall be carried out at all signal levels between MTL and –21 dBm.

Note.— Either antenna may be selected if the difference in signal level is less than 3 dB.

**3.1.1.7.18.3.4** Received signal delay tolerance. If an interrogation is received at one antenna 0.125 microsecond or less in advance of reception at the other antenna, the interrogations shall be considered to be simultaneous interrogations, and the above antenna selection criteria applied. If an accepted interrogation is received at either antenna 0.375 microsecond or more in advance of reception at the other antenna, the antenna selected for the reply shall be that which received the earlier interrogation. If the relative time of receipt is between 0.125 and 0.375 microsecond, the transponder shall select the antenna for reply either on the basis of the simultaneous interrogation criteria or on the basis of the earlier time of arrival.

**3.1.1.7.18.4** Diversity transmission channel isolation. The peak RF power transmitted from the selected antenna shall exceed the power transmitted from the non-selected antenna by at least 20 dB.

**3.1.1.7.18.5** Reply delay of diversity transponders. The total two-way transmission difference in mean reply delay between the two antenna channels (including the differential delay caused by transponder-to- antenna cables and the horizontal distance along the aircraft centre line between the two antennas) shall not exceed 0.13 microsecond for interrogations of equal amplitude. This requirement shall hold for interrogation signal strengths between MTL +3 dB and –21 dBm. The jitter requirements on each individual channel shall remain as specified for non-diversity transponders.

Note.— This requirement limits apparent jitter caused by antenna switching and by cable delay differences.

**3.1.1.7.19** **Variable direct data**. Variable direct data from the aircraft which can change in flight shall be

a) the Mode C altitude code (3.1.1.7.12.2);

b) the Mode A identity code (3.1.1.7.12.1); and

c) the SPI condition (3.1.1.6.3).

**3.1.1.7.19.1 Interfaces for variable direct data**

**3.1.1.7.19.1.1** A means shall be provided, while on the ground or during flight, for the SPI condition to be inserted by the pilot, without the entry or modification of other flight data.

**3.1.1.7.19.1.2** A means shall be provided, while on the ground or during flight, for the Mode A identity code to be displayed to the pilot and modified without the entry or modification of other flight data.

Note.— Implementation of the pilot action for entry of data will be as simple and efficient as possible in order to minimize the time required and reduce the possibility of errors in the data entry.

**3.1.1.7.19.1.3** Interfaces shall be included to accept the pressure-altitude.

Note.— A specific interface design for the variable direct data is not prescribed.

**3.1.1.8 TECHNICAL CHARACTERISTICS OF GROUND INTERROGATORS MODE A AND MODE C CAPABILITIES**

**3.1.1.8.1** **Interrogation repetition frequency**. The maximum interrogation repetition frequency shall be 450 interrogations per second.

**3.1.1.8.1.1** To minimize unnecessary transponder triggering and the resulting high density of mutual interference, all interrogators shall use the lowest practicable interrogator repetition frequency that is consistent with the display characteristics, interrogator antenna beam width and antenna rotation speed employed.

**3.1.1.8.2 RADIATED POWER**

**3.1.1.8.2.1** **Recommendation**: In order to minimize system interference the effective radiated power of interrogators shall be reduced to the lowest value consistent with the operationally required range of each individual interrogator site.

**3.1.1.8.2.2** *Inactive-state interrogator output power.* For interrogator commissioned on or after 1 January 2030, when the interrogator is not transmitting an interrogation, its output shall not exceed –5 dBm effective radiated power at any frequency between 960 MHz and 1 215 MHz.

**3.1.1.8.3** When Mode C information is to be used from aircraft flying below transition levels, the altimeter pressure reference datum shall be taken into account.

**3.1.1.8.4 INTERROGATOR RADIATED FIELDPATTERN**

The beam width of the directional interrogator antenna radiating P3 shall not be wider than is operationally required. The side- and back-lobe radiation of the directional antenna should be at least 24 dB below the peak of the main-lobe radiation.

**3.1.1.8.5 INTERROGATOR MONITOR**

**3.1.1.8.5.1** The range and azimuth accuracy of the ground interrogator shall be monitored at sufficiently frequent intervals to ensure system integrity.

**3.1.1.8.5.2** In addition to range and azimuth monitoring, provision shall be made to monitor continuously the other critical parameters of the ground interrogator for any degradation of performance exceeding the allowable system tolerances and to provide an indication of any such occurrence.

**3.1.1.8.6 SPURIOUS EMISSIONS AND SPURIOUS RESPONSES**

**3.1.1.8.6.1** SPURIOUS RADIATION

CW radiation shall not exceed 76 dB below 1 W for the interrogator.

**3.1.2 Mode S and inter mode capabilities**

**3.1.2.1 Interrogation signals-in-space characteristics.** The paragraphs herein describe the signals-in-space at the antenna (s) of the interrogator.

**3.1.2.1.1 Interrogation carrier frequency**. The carrier frequency of all interrogations (uplink transmissions) from ground facilities with Mode S capabilities shall be 1030 plus or minus 0.01 MHz, except during the phase reversal, while maintaining the spectrum requirements of 3.1.2.1.2.

*Note. - During the phase reversal the frequency of the signal may shift by several MHz before returning to the specified value.*

**3.1.2.1.2 Interrogation spectrum**. The spectrum of a Mode S interrogation about the carrier frequency shall not exceed the limits specified in Figure3-2.

**3.1.2.1.3 Polarization**. Polarization of the interrogation and control transmissions shall be nominally vertical.

**3.1.2.1.4 Modulation**. For Mode S interrogations, the carrier frequency shall be pulse modulated. In addition, the data pulse, P6, shall have internal phase modulation.

**3.1.2.1.4.1 Pulse modulation**. Intermode and Mode S interrogations shall consist of a sequence of pulses as specified in 3.1.2.1.5 and Tables 3-1, 3-2, 3-3, and 3-4, as summarized in Table 3-11.

**3.1.2.1.4.2 Phase modulation**. The short (16.25-microsecond) and long (30.25-microsecond) P6 pulses of 3.1.2.1.4.1 shall have internal binary differential phase modulation consisting of 180-degree phase reversals of the carrier at a 4 megabit per second rate.

**3.1.2.1.4.2.1 Phase reversal duration**. The duration of the phase reversal shall be less than 0.08 microseconds and the phase shall advance (or retard) monotonically throughout the transition region. There shall be no amplitude modulation applied during the phase transition.

**3.1.2.1.4.2.2 Phase relationship.** The tolerance on the 0 and 180-degree phase relationship between successive chips and on the sync phase reversal (3.1.2.1.5.2.2) within the *P*6 pulse shall be plus or minus 5degrees.

*Note1.— The minimum duration of the phase reversal is not specified. Nonetheless, the spectrum requirements of 3.1.2.1.2 must be met.*

*Note 2.— The phase reversal can be generated using different methods. This includes hard keying with strong amplitude drop and rapid phase reversal or other techniques with little or no amplitude drop, but with frequency shift during the phase reversal and slow phase reversal (80ns). A demodulator cannot make any assumption on the type of modulation technology used and therefore cannot rely on the specificities of the signal during the phase reversal to detect a phase reversal.*

**Table 3-1. Pulse shapes — Interrogation pulse durations**

| *Pulse* | *Duration* | *Duration Tolerance* | *(Rise time)* | | *(Decay time)* | |
|---|---|---|---|---|---|---|
| | | | *Min.* | *Max* | *Min.* | *Max* |
| $P_1$, $P_2$, $P_3$, $P_5$ | 0.80 | ±0.09 | 0.05 | 0.10 | 0.05 | 0.20 |
| $P_4$(short) | 0.80 | ±0.09 | 0.05 | 0.10 | 0.05 | 0.20 |
| | | | | | | |
| $P_6$(short) | 16.25 | ±0.20 | 0.05 | 0.10 | 0.05 | 0.20 |
| $P_6$ (long) | 30.25 | ±0.20 | 0.05 | 0.10 | 0.05 | 0.20 |
| $S_1$ | 0.80 | ±0.10 | 0.05 | 0.10 | 0.05 | 0.20 |

**3.1.2.1.5 Pulse and phase reversal sequences**. Specific sequences of the pulses or phase reversals described in 3.1.2.1.4 shall constitute interrogations.

**3.1.2.1.5.1 Intermode interrogation**

**3.1.2.1.5.1.1 Mode A/C/S all-call interrogation.** This interrogation consists of a minimum three pulses: P1, P3, and the long P4 as shown in Figure 3-3.

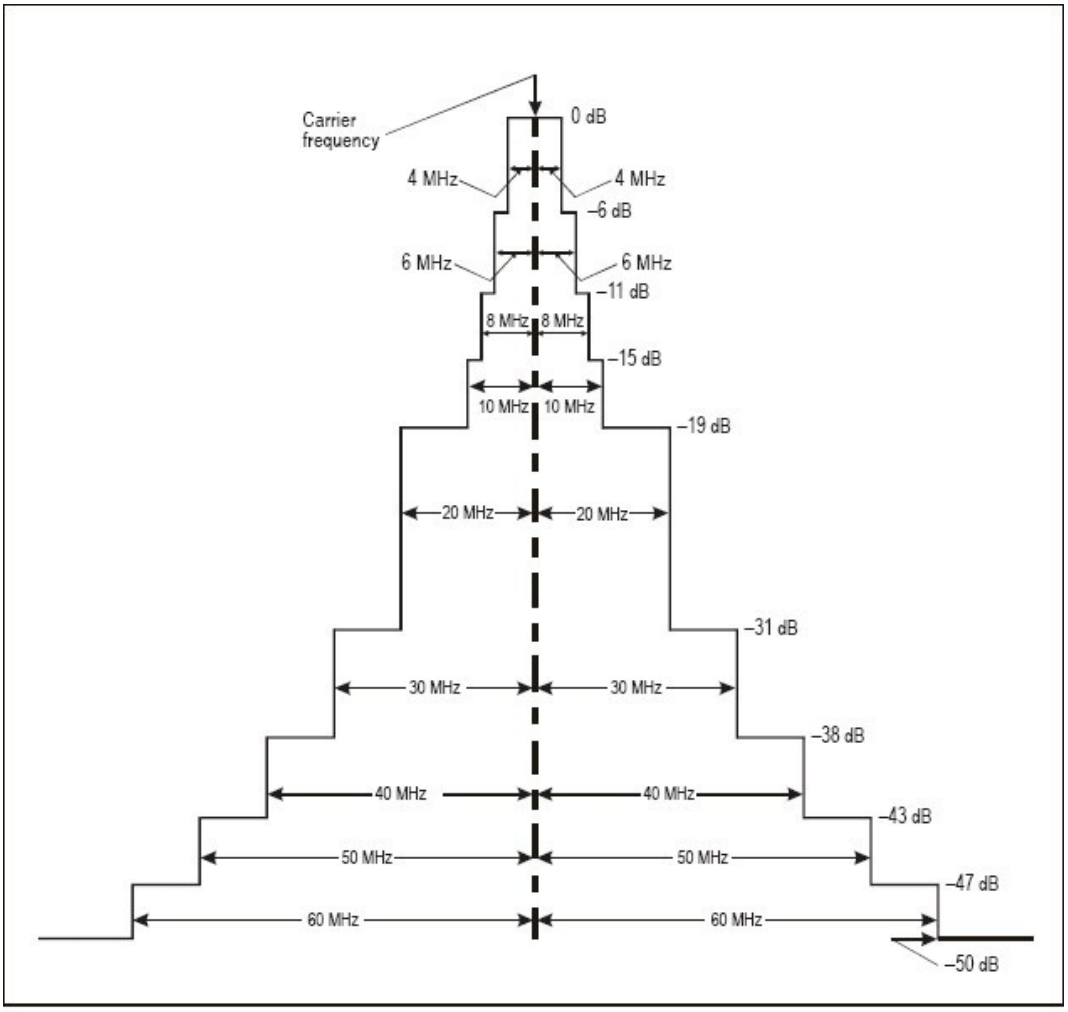


**Figure 3-2. Required spectrum limits for interrogator transmitter**

**3.1.2.1.5.1.2 Mode A/C-only all-call interrogation**. This interrogation is defined as P1, P3, and a short P4 as shown in Figure 3-3.

*Note.— The Mode A/C-only all-call interrogation elicits a Mode A or Mode C reply from a Mode A/C transponder. A Mode S transponder recognizes the short P4 pulse and does not reply to thisinterrogation.*

**3.1.2.1.5.1.2.1 Pulse intervals**. The pulse intervals between P1 and P3 shall be as defined in 3.1.1.4.3 The pulse interval between P3 and P4 shall be 2 plus or minus 0.04 microsecond.

**3.1.2.1.5.1.2.2 Pulse amplitudes**. Relative amplitudes between pulses P1 and P3 shall be in accordance with 3.1.1.5. The amplitude of P4 shall be within -0.5 / +2.5 dB of the amplitude of P3.

**3.1.2.1.5.1.2.3** Sidelobe suppression. The pulse interval between P1 and P2 shall be 2 plus or minus 0.04 microsecond. Amplitude of P2 shall be in accordance with 3.1.1.5.

Note 1.— Side-lobe suppression is required for SSR interrogators per 2.1.2.4.1. ACAS and multilateration system interrogations may or may not include the P2 pulse.

Note 2.— When used, P2 is additionally radiated to prevent replies from aircraft in the side and back lobes of the antenna.

**3.1.2.1.5.2** **Mode S interrogation**. The Mode S interrogation consists of a minimum of three pulses: P1, P2 and P6 as shown in Figure3-4.

**3.1.2.1.5.2.1** **Mode S side-lobe suppression**. The P5 pulse shall be used with the Mode S-only all-call interrogation (UF = 11, see 3.1.2.5.2) to prevent replies from aircraft in the side and back lobes of the antenna (3.1.2.1.5.2.5). When used, P5 shall be transmitted using a separate antenna pattern.

**3.1.2.1.5.2.2** **Sync phase reversal**. The first phase reversal in the P6 pulse shall be the sync phase reversal. It shall be the timing reference for subsequent transponder operations related to the interrogation.

**3.1.2.1.5.2.3** **Data phase reversals**. Each data phase reversal shall occur only at a time interval (N times 0.25) plus or minus 0.02 microsecond (N equal to, or greater than 2) after the sync phase reversal. The 16.25-microsecond P6 pulse shall contain at most 56 data phase reversals. The 30.25-microsecond P6 pulse shall contain at most 112 data phase reversals. The last chip, that is the 0.25-microsecond time interval following the last data phase reversal position, shall be followed by a 0.5-microsecond guard interval.

**3.1.2.1.5.2.4** **Intervals**. The pulse interval between P1 and P2 shall be 2 plus or minus 0.04 microseconds. The interval between the leading edge of P2 and the sync phase reversal of P6 shall be 2.75 plus or minus 0.04 microseconds. The leading edge of P6 shall occur 1.25 plus or minus 0.04 microsecond before the sync phase reversal. P5, if transmitted, shall be centered over the sync phase reversal; the leading edge of P5 shall occur 0.4 plus or minus 0.04 microsecond before the sync phase reversal.

**3.1.2.1.5.2.5** **Pulse amplitudes**. The amplitude of P2 and the amplitude of the first microsecond of P6 shall be greater than the amplitude of P1 minus 0.25 dB. Exclusive of the amplitude transients associated with phase reversals, the amplitude variation of P6 shall be less than 1dB and the amplitude variation between successive chips in P6 shall be less than 0.25dB. The radiated amplitude of P5 at the antenna of the transponder shall be:

a) equal to or greater than the radiated amplitude of P6 from the side-lobe transmissions of the antenna radiating P6; and

b) at a level lower than 9 dB below the radiated amplitude of P6 within the desired arc of interrogation.

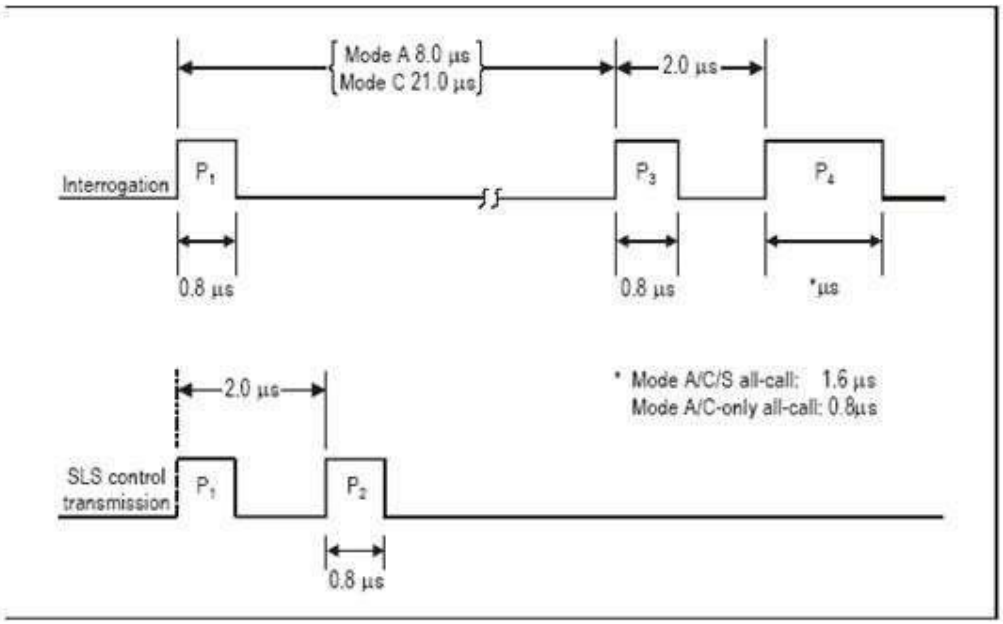


**Figure 3-3. Intermode interrogation pulse sequence**

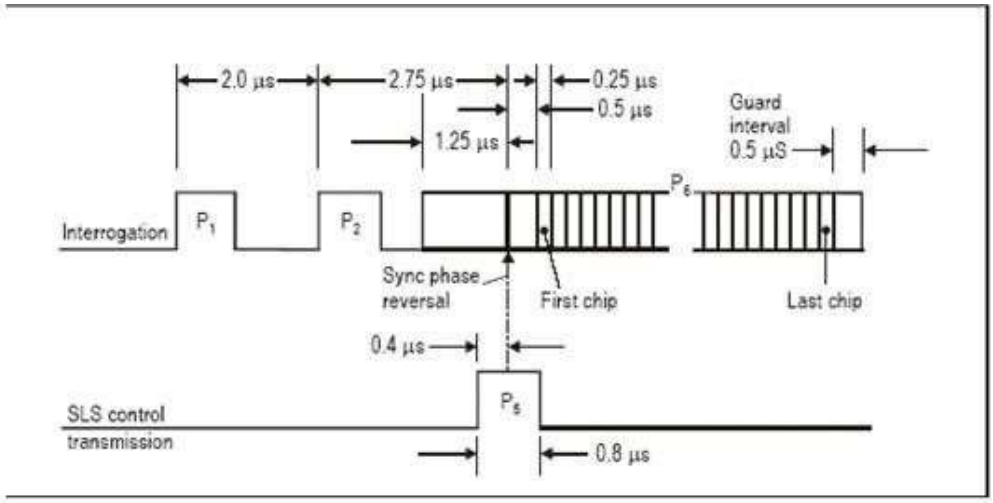


**Figure 3-4. Mode S interrogation pulse sequence**

**3.1.2.2 REPLY SIGNALS-IN-SPACECHARACTERISTICS**

**3.1.2.2.1 Reply carrier frequency**.

**3.1.2.2.1.1** Standard pulse position modulation (PPM) reply carrier frequency The carrier frequency of all standard Mode S PPM replies (downlink transmissions) shall be 1090 plus or minus 1MHz.

**3.1.2.2.1.2 Phase overlay reply frequency.** The carrier frequency of all phase overlay reply transmissions as defined in 3.1.2.3.1.2.2 shall be 1 090 MHz plus or minus 25 KHz.

**3.1.2.2.2 Reply spectrum:** The spectrum of Mode S reply about the carrier frequency shall not exceed the limits specified in Figure3-5.

**3.1.2.2.3 Polarization**. Polarization of the reply transmissions shall be nominally vertical.

**3.1.2.2.4 Modulation**. The Mode S reply shall consist of a preamble and a data block. The preamble shall be a 4-pulse sequence and the data block shallbebinarypulse-positionmodulatedata1megabitperseconddata rate.

**3.1.2.2.4.1 Pulseshapes**.PulseshapesshallbeasdefinedinTable3-2.Allvalues are in microseconds.

**3.1.2.2.5 Mode S reply**. The Mode S reply shall be as shown in Figure 3-6. The datablockinModeSrepliesshallconsistofeither56or112information bits.

**3.1.2.2.5.1 Pulse intervals**. All reply pulses shall start at a defined multiple of 0.5 microsecond from the first transmitted pulse. The tolerance in all cases shall be plus or minus 0.05microsecond.

**3.1.2.2.5.1.1 Reply preamble**. The preamble shall consist of four pulses, each with duration of 0.5 microsecond. The pulse intervals from the first transmitted pulse to the second, third and fourth transmitted pulses shall be 1, 3.5 and 4.5 microseconds, respectively.

**3.1.2.2.5.1.2 Reply data pulses**. The reply data block shall begin 8 microseconds after the leading edge of the first transmitted pulse. Either 56 or 112 one-microsecond bit intervals shall be assigned to each transmission. A 0.5-microsecond pulse shall be transmitted either in the first or in the second half of each interval. When a pulse transmitted in the second half of one interval is followed by another pulse transmitted in the first half of the next interval, the two pulses merge and a one-microsecond pulse shall be transmitted.

**3.1.2.2.5.2 Pulse amplitudes**. The pulse amplitude variation between one pulse and any other pulse in a Mode S reply shall not exceed 2dB.

#### 3.1.2.2.6 Reply phase overlay characteristics

**3.1.2.2.6.1** Reply phase overlay modulation type. The phase modulation reply transmission defined 3.1.2.3.1.2.2 in shall use 8 phase-shift keying (PSK) phase states to transmit 3-bits associated with a single phase state for each PPM data bit and in each of the four preamble pulses.

**3.1.2.2.6.2** Phase error tolerance. The phase error of transmitted phase information shall be within 3.0 degrees root-mean-square (RMS) and 12.2 degrees peak for the duration of any 0.5 microsecond PPM reply pulse, excluding the leading and trailing edges of the pulse. When a one-microsecond pulse is transmitted as a result of a PPM ZERO data bit in the second half of one PPM bit interval followed by a PPM ONE bit in the first half of the next interval, the phase error for the phase information for each of the 2-phase states shall be within 3.0 degrees RMS and 12.2 degrees peak, except during the phase transition interval when a phase change is required between the 2-phase states, and the leading and trailing edges of the one-microsecond pulse. The phase error tolerance is in addition to the average frequency tolerance specified in 3.1.2.2.1.2, including the phase drift tolerance specified in 3.1.2.2.6.4.

Note.— During transmitter pulse turn-on and turn-off, the phase of the transmitted signal is typically not stable until the final RF output power is reached at the top portion of the pulse. The phase overlay reception algorithm does not rely on a constant phase during the transient portions of the pulse.

**3.1.2.2.6.3** Phase modulation during the phase transition interval. For a 1.0 microsecond pulse which is formed by a PPM ZERO data bit followed by a PPM ONE data bit, the phase transition interval in which the phase is allowed to change between states shall be less than the 400-nanosecond intervals commencing 200 nanoseconds prior to the PPM bit interval transition at the centre of the 1.0 microsecond pulse.

Note 1.— To meet the pulse-to-pulse amplitude variation requirement in 3.1.2.2.5.2, the RF peak output power of any merged PPM pulses will not vary more than 1 dB due to PO for a receiver bandwidth of 8
MHz when linearly applying phase overlay (PO) across the 400-nanosecond phase transition interval.

Note 2.— The worst case for spectral growth is when the phase overlay frequency shifts are 180 degrees between symbols in 1 microsecond wide PPM data pulses as shown in Figure 3-9. To meet the spectrum requirement in 3.1.2.2.2, one method of reducing spectral growth in this case is to ensure the 180-degree phase transition is linear.

**3.1.2.2.6.4** Phase drift. The peak phase drift due to transmitter frequency drift shall be within ±43 degrees for the entire message duration. The phase drift tolerance is in addition to the average frequency tolerance specified in 3.1.2.2.1.2.

**3.1.2.2.6.5** Reply spectrum. The reply spectrum defined in 3.1.2.2.2 shall be met when phase overlay transmissions are active.

### 3.1.2.3 MODE S DATASTRUCTURE

### 3.1.2.3.1 DATA ENCODING

**3.1.2.3.1.1 Interrogation data**. The interrogation data block shall consist of the sequence of 56 or 112 data chips positioned after the data phase reversals within P6 (3.1.2.1.5.2.3). A 180-degree carrier phase reversal preceding a chip shall characterize that chip as a binary ONE. The absence of a preceding phase reversal shall denote a binary ZERO.

**3.1.2.3.1.2 Reply data**.

**3.1.2.3.1.2.1 Standard PPM data**. The reply data block shall consist of 56 or 112 data bits formed by binary pulse position modulation encoding of the reply data as described in 3.1.2.2.5.1.2. A pulse transmitted in the first half of the interval shall represent a binary ONE whereas a pulse transmitted in the second half shall represent a binary ZERO.

**3.1.2.3.1.2.2 Phase overlay modulated data.** For phase overlay modulated signals, the PPM reply data shall additionally contain 8PSK modulated data within the bit interval containing the pulse, either the first half or the second half of the interval as per 3.1.2.3.1.2.1.

**3.1.2.3.1.2.2.1 Phase overlay data definition.** In addition to the binary ONE or binary ZERO represented by PPM, each data interval shall consist of three additional bit values representing the phase modulated reply data as determined by the encoded phase of the pulse in the bit interval as shown in Table 3-7.

**3.1.2.3.1.2.2.2 Sync phase reference pulses.** The reference sync phase shall be encoded in the four preamble pulses and the data pulses of the first four PPM data bits by maintaining constant phase for these pulses.

**3.1.2.3.1.2.2.3 Phase reference.** The reference phase shall represent zero degrees. This reference established by the data pulses in 3.1.2.3.1.2.2.2 is used to establish the phase for subsequent phase state determination.

**3.1.2.3.1.3 Bit numbering**. The bits shall be numbered in the order of their transmission, beginning with bit 1. Unless otherwise stated, numerical values encoded by groups (fields) of bits shall be encoded using positive binary notation and the first bit transmitted shall be the most significant bit (MSB). Information shall be coded in fields which consist of at least one bit.

### 3.1.2.3.2 FORMATS OF MODE S INTERROGATIONS AND REPLIES

**3.1.2.3.2.1 Essential fields**. Every Mode S transmission shall contain two essential fields. One is a descriptor which shall uniquely define the format of the transmission. This shall appear at the beginning of the transmission for

all formats. The descriptors are designated by the UF (uplink format) or DF (downlink format) fields. The second essential field shall be a 24-bit field appearing at the end of each transmission and shall contain parity information. In all uplink and in currently defined downlink formats parity information shall be overlaid either on the aircraft address (3.1.2.4.1.2.3.1) or on the interrogator identifier according to 3.1.2.3.3.2. The designators are AP (address/parity) or PI (parity/interrogator identifier).

**3.1.2.3.2.1.1** **UF: Uplink format**. This uplink format field (5 bits long except in format 24 where it is 2 bits long) shall serve as the uplink format descriptor in all Mode S interrogations and shall be coded according to Figure3-7.

**3.1.2.3.2.1.2** **DF: Downlink format**. This downlink format field (5 bits long except in format 24 where it is 2 bits long) shall serve as the downlink format descriptor in all Mode S replies and shall be coded according to Figure 3-8.

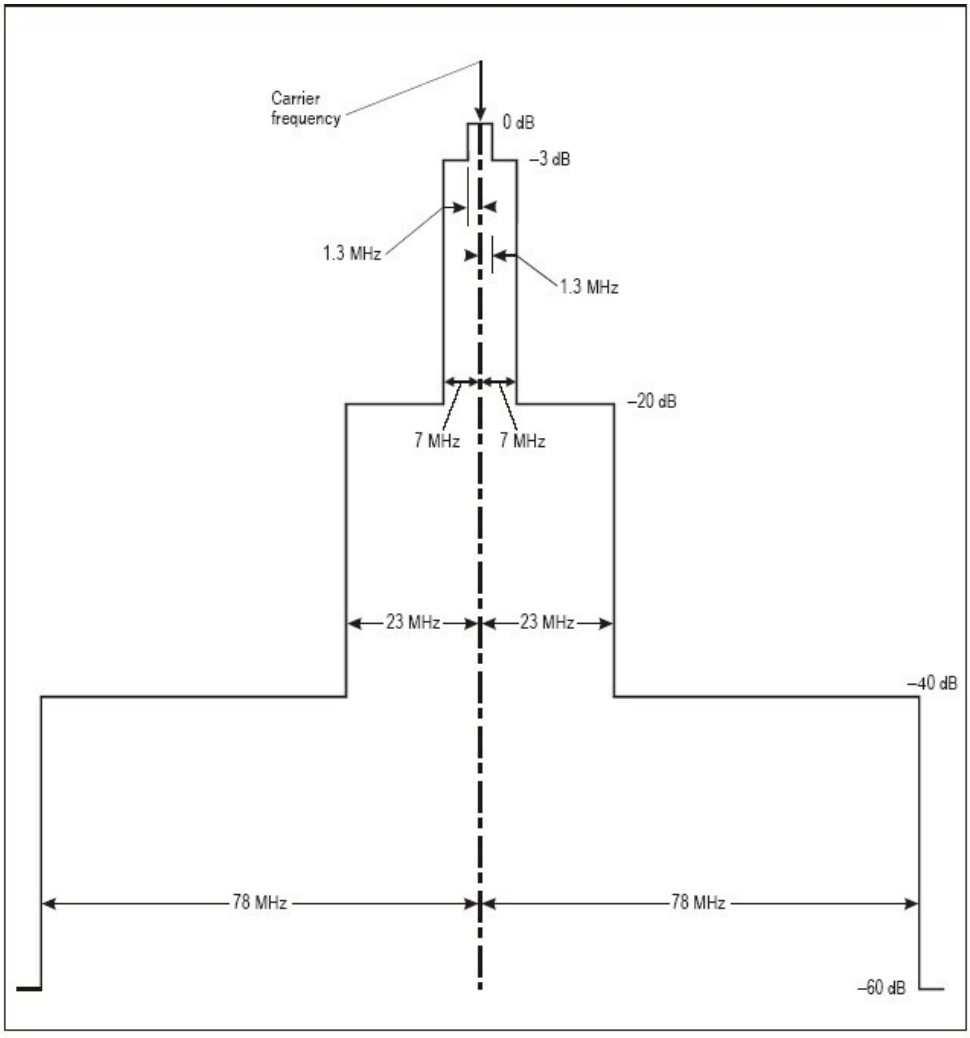


**Figure 3-5. Required spectrum limits for transponder transmitter**

*Note.— This figure shows the spectrum centred on the carrier frequency and will therefore shift in its entirety plus or minus 1 MHz along with the carrier frequency.*

**Table 3-2. Pulse shapes — Mode S replies**

| *Pulse duration* | *Duration tolerance* | *(Rise time) Max.* | *(Decay time) Max.* |
|---|---|---|---|
| 0.5 | ±0.05 | 0.1 | 0.2 |
| 1.0 | ±0.05 | 0.1 | 0.2 |

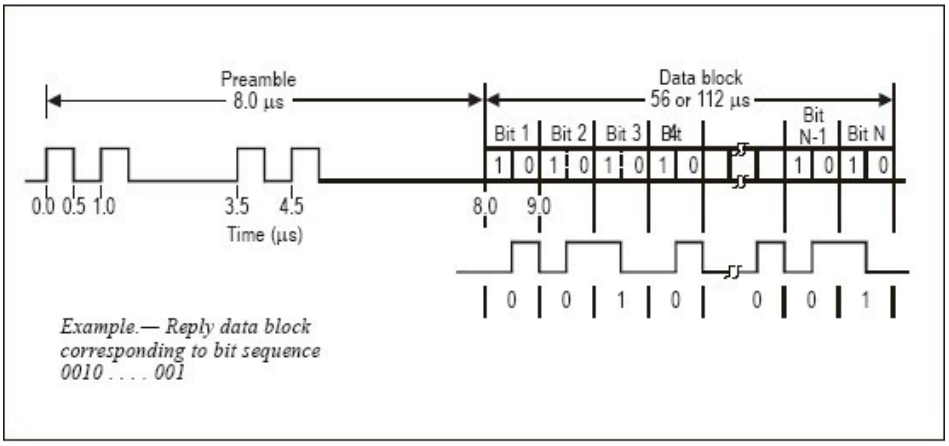


**Figure 3-6. Mode S reply**

**3.1.2.3.2.1.3** **AP: Address/parity**. This 24-bit (33-56 or 89-112) field shall appear in all uplink and currently defined downlink formats except the ModeS-only all-call reply, DF = 11. The field shall contain parity overlaid on the aircraft address according to3.1.2.3.3.2.

**3.1.2.3.2.1.4** **PI: Parity/interrogator identifier**. This 24-bit (33-56) or (89-112) downlink field shall have parity overlaid on the interrogator's identity code according to 3.1.2.3.3.2 and shall appear in the Mode S all-call reply, DF = 11 and in the extended squitter, DF = 17 or DF = 18. If the reply is made in response to a Mode S-only all- call with CL field (3.1.2.5.2.1.3) and IC field (3.1.2.5.2.1.2) equal to 0,or is an acquisition or an extended squitter (3.1.2.8.5, 3.1.2.8.6 or 3.1.2.8.7), the II and the SI codes shall be0.

**3.1.2.3.2.1.5** **DP: Data parity.** This 24-bit (89 - 112) downlink field shall contain the parity overlaid on a "Modified AA" field which is established by performing a modulo-2 summation (e.g. Exclusive-Or function) of the discrete address most significant 8 bits and BDS1, BDS2 where BDS1 (3.1.2.6.11.2.2) and BDS2 (3.1.2.6.11.2.3) are provided by the "RR" (3.1.2.6.1.2) and "RRS" (3.1.2.6.1.4.1) as specified in and 3.1.2.6.11.2.3.

Example:

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Discrete address | = | AA | AA | AA | Hex = | 1010 | 1010 | 1010 | 1010 | 101 |
| BDS1.BDS2 | = | 5F | 00 | 00 | Hex = | 1111 | 0000 | 0000 | 0000 | 000 |
| Discrete address | ⊕ | BDS1, | BDS2 | | Hex = | 0101 | 1010 | 1010 | 1010 | 101 |
| "Modified AA" | = | F5 | AA | AA | Hex = | 0101 | 1010 | 1010 | 1010 | 101 |

where "⊕" prescribes modulo-2 addition
The resulting "Modified AA" field then represents the 24 bit sequence (a1, a2...a24) that shall be used to generate the DP field in accordance with paragraph 3.1.2.3.3.2.

The DP field shall be used in DF=20 and DF=21 replies if the transponder is capable of supporting the DP field and if the overlay control (OVC-3.1.2.6.1.4.1.i) bit is set to one (1) in the interrogation requesting downlink of GICB registers.

**3.1.2.3.2.2 Unassigned coding space**. Unassigned coding space shall contain all ZEROs as transmitted by interrogators and transponders.

**3.1.2.3.2.3 Zero and unassigned codes**. A zero code assignment in all defined fields shall indicate that no action is required by the field. In addition, codes not assigned within the fields shall indicate that no action is required.

**3.1.2.3.2.4 Intentionally left blank**

**3.1.2.3.2.5 Phase overlay reply data formats**. An overview of the transmitted phase overlay data message structure is shown in Figure 3-10.

**3.1.2.3.2.5.1 Phase overlay message data.** Phase data (PD) message bits shall be contained in bits 1 through 204 of the 324-bit phase data message. If phase overlay is not enabled for the reply or extended squitter, the message data field shall be zero filled**.**

**3.1.2.3.2.5.2 Phase overlay message type field.** Phase overlay bits 1 through 8 of the 324-bit phase data message shall contain the message type defining the PO message as shown in Table 3-12.

**Note.—** The data format of the ADS-B State and Status Message, phase overlay Mode S GICB Data Messages and phase overlay Interrogation/Reply Monitor Messages ADS-R, ADS-SLR and TIS-B are described in the Technical Provisions for Mode S Services and Extended Squitter (Doc 9871).

**3.1.2.3.2.5.3 Phase overlay parity correction data.** Phase overlay bits 205 through 324 of the phase data message shall contain the 120-bit forward error correction (FEC) data encoded in accordance with either 3.1.2.3.2.5.3.1 or 3.1.2.3.2.5.3.2, as specified by the Message Type value in Table 3-12.

**3.1.2.3.2.5.3.1 Reed-Solomon**. When transmitting phase overlay message types 1-6

(RS Message Type Block), the transmitted phase overlay shall use a Reed Solomon RS (54, 34) code with 6-bit symbols where two adjacent phase states (two adjacent PPM pulse data bits) are used as one 6-bit symbol (3 phase bits per 1 PPM bit). The RS (54, 34) code is shortened from a 63 symbol (2N-1) code. The first nine 6-bit symbols of the 63 symbol code that is used for the RS (54, 34) code shall have all bits set to zero. The Reed-Solomon shall use a generator polynomial start value of 1 to compute the parity error correction value. The Reed Solomon shall use a field polynomial of $x^6 + x + 1$.

Note.— Example of Reed-Solomon encodings are shown in Doc 9924

3.1.2.3.2.5.3.2 **Low Density Parity Code (LDPC).** When transmitting phase overlay message types 7-12 (LDPC Message Type Block), the transmitted phase overlay parity data shall be established by a cyclic LDPC (54, 34) code with 6 blocks of binary data as shown in Table 3-13, with each block of 54 bits input to the LDPC parity check matrix independently, and after encoding the parity of each block, the message and parity bits are assembled back in order. The LDPC encoder shall use a field polynomial of $x^{20} + x^{18} + x^{11} + x^9 + x^2 + 1$.

Note.— The parity check matrix is presented in Doc 9924

**3.1.2.3.3 ERROR PROTECTION**

**3.1.2.3.3.1 Technique**. Parity check coding shall be used within Mode S interrogations and replies to provide protection against the occurrence of errors.

**3.1.2.3.3.1.1 Parity check sequence**. A sequence of 24 parity check bits shall be generated by the rule described in 3.1.2.3.3.1.2 and shall be incorporated into the field formed by the last 24 bits of all Mode S transmissions. The 24 parity checkbits shall be combined with either the address coding or the interrogator identifier coding as described in 3.1.2.3.3.2. The resulting combination then forms either the AP (address/parity, 3.1.2.3.2.1.3) field or the PI (parity/interrogator identifier, 3.1.2.3.2.1.4) field.

**3.1.2.3.3.1.2 Parity check sequence generation**. The sequence of 24 parity bits (p1, p2,..., p24) shall be generated from the sequence of information bits (m1, m2,..., mk) where k is 32 or 88 for short or long transmissions respectively. This shall be done by means of a code generated by the polynomial:

$$G(x) = 1 + x^3 + x^{10} + x^{12} + x^{13} + x^{14} + x^{15} + x^{16}$$
$$+ x^{17} + x^{18} + x^{19} + x^{20} + x^{21} + x^{22} + x^{23} + x^{24}$$

When by the application of binary polynomial algebra, $x^{24}$ [M(x)] is divided by G(x) where the information sequence M(x) is:

$$m_k + m_{k-1}x + m_{k-2}x^2 + \ldots + m_1x^{k-1}$$

The result is a quotient and a remainder R(x) of degree less than 24. The bit sequence formed by this remainder represents the parity check sequence. Parity bit pi, for any I from 1 to 24, is the coefficient of x24-i in R(x).

*NOTES:*

| Format No. | UF | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 0 | 00000 | 3 | RL:1 | 4 | AQ:1 | DS:8 | 10 | AP:24 | .... Short air-air surveillance (ACAS) |
| 1 | 00001 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 2 | 00010 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 3 | 00011 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 4 | 00100 | PC:3 | RR:5 | DI:3 | SD:16 | | | AP:24 | .... Surveillance, altitude request |
| 5 | 00101 | PC:3 | RR:5 | DI:3 | SD:16 | | | AP:24 | .... Surveillance, identify request |
| 6 | 00110 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 7 | 00111 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 8 | 01000 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 9 | 01001 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 10 | 01010 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 11 | 01011 | PR:4 | IC:4 | CL:3 | 16 | | | AP:24 | .... Mode S only all-call |
| 12 | 01100 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 13 | 01101 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 14 | 01110 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 15 | 01111 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 16 | 10000 | 3 | RL:1 | 4 | AQ:1 | 18 | MU:56 | AP:24 | .... Long air-air surveillance (ACAS) |
| 17 | 10001 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 18 | 10010 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 19 | 10011 | 107 | | | | | | | ... Reserved for military use |
| 20 | 10100 | PC:3 | RR:5 | DI:3 | SD:16 | MA:56 | | AP:24 | .... Comm-A, altitude request |
| 21 | 10101 | PC:3 | RR:5 | DI:3 | SD:16 | MA:56 | | AP:24 | .... Comm-A, identify request |
| 22 | 10110 | 27 or 83 | | | | | | AP:24 | ... Reserved for military use |
| 23 | 10111 | 27 or 83 | | | | | | AP:24 | ... Reserved |
| 24 | 11 | RC:2 | NC:4 | MC:80 | | | | AP:24 | .... Comm-C (ELM) |

1. XX:M denotes a field designated "XX" which is assigned M bits.
2. N denotes unassigned coding space with N available bits. These shall be coded as ZEROs for transmission.
3. For uplink formats (UF) 0 to 23 the format number corresponds to the binary code in the first five bits of the interrogation. Format number 24 is defined as the format beginning with "11" in the first two bit positions while the following three bits vary with the interrogation content.
4. All formats are shown for completeness, although a number of them are unused. Those formats for which no application is presently defined remain undefined in length. Depending on future assignment they may be short (56 bits) or long (112 bits) formats. Specific formats associated with Mode S capability levels are described in later paragraphs.
5. The PC, RR, DI and SD fields do not apply to a Comm-A broadcast interrogation.

Figure 3-7. Summary of Mode S interrogation or uplink formats

| Format No. | DF | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 00000 | VS:1 | CC:1 | 1 | SL:3 | 2 | RI:4 | 2 | AC:13 | AP:24 | .... Short air-air surveillance (ACAS) |
| 1 | 00001 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 2 | 00010 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 3 | 00011 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 4 | 00100 | FS:3 | | DR:5 | | UM:6 | | AC:13 | | AP:24 | .... Surveillance, altitude reply |
| 5 | 00101 | FS:3 | | DR:5 | | UM:6 | | ID:13 | | AP:24 | .... Surveillance, identify reply |
| 6 | 00110 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 7 | 00111 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 8 | 01000 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 9 | 01001 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 10 | 01010 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 11 | 01011 | CA:3 | | | | AA:24 | | | | PI:24 | .... All-call reply |
| 12 | 01100 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 13 | 01101 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 14 | 01110 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 15 | 01111 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 16 | 10000 | VS:1 | 2 | SL:3 | 2 | RI:4 | 2 | AC:13 | MV:56 | AP:24 | .... Long air-air surveillance (ACAS) |
| 17 | 10001 | CA:3 | | AA:24 | | | ME:56 | | | PI:24 | ... Extended squitter |
| 18 | 10010 | CF:3 | | AA:24 | | | ME:56 | | | PI:24 | ... Extended squitter/non transponder |
| 19 | 10011 | AF:3 | | 10<br>4 | | | | | | | ... Reserved for military use |
| 20 | 10100 | FS:3 | | DR:5 | | UM:6 | | AC:13 | MB:56 | AP:24<br>DP:24 | .... Comm-B, altitude reply<br>.... (see *Note 5*) |
| 21 | 10101 | FS:3 | | DR:5 | | UM:6 | | ID:13 | MB:56 | AP:24<br>DP:24 | .... Comm-B, identify reply<br>.... (see *Note 5*) |
| 22 | 10110 | 27 or 83 | | | | | | | | P:24 | ... Reserved for military use |
| 23 | 10111 | 27 or 83 | | | | | | | | P:24 | ... Reserved |
| 24 | 11 | 1 | | KE:1 | | ND:4 | | MD:80 | | AP:24 | .... Comm-D (ELM) |

*NOTES:*

1. XX:M denotes a field designated "XX" which is assigned M bits.

   P:24 denotes a 24-bit field reserved for parity information.

2. N denotes unassigned coding space with N available bits. These shall be coded as ZEROs for transmission.

3. For downlink formats (DF) 0 to 23 the format number corresponds to the binary code in the first five bits of the reply. Format number 24 is defined as the format beginni with "11" in the first two bit positions while the following th bits may vary with the reply content.

4. All formats are shown for completeness, although a number them are unused. Those formats for which no application presently defined remain undefined in length. Depending future assignment they may be short (56 bits) or long (112 bi formats. Specific formats associated with Mode S capabil levels are described in later paragraphs.

**Figure 3-8. Summary of Mode S reply or downlink formats**

Note 5 to Figure 3-8.

*5. The Data parity (DP) (3.1.2.3.2.1.5) is used if it has been commanded by the OVC (3.1.2.6.1.4.i) in accordance with paragraph 3.1.2.6.11.2.5.*

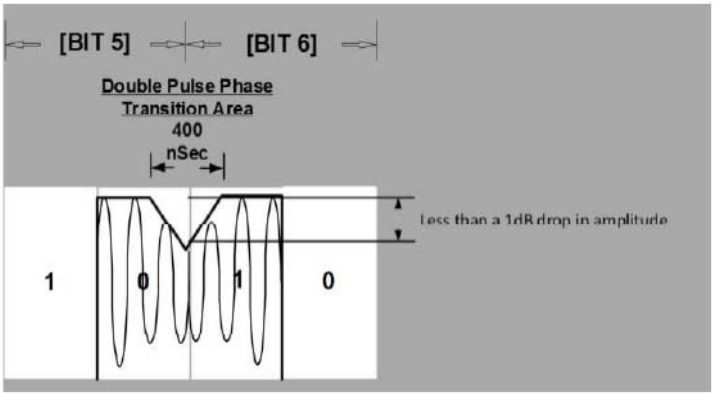


**Figure 3-9. Phase overlay one microsecond phase transition**

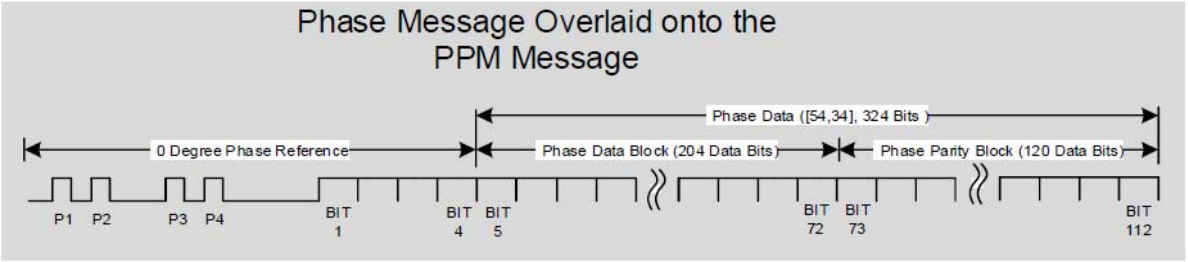


**Figure 3-10. Phase overlay message structure**

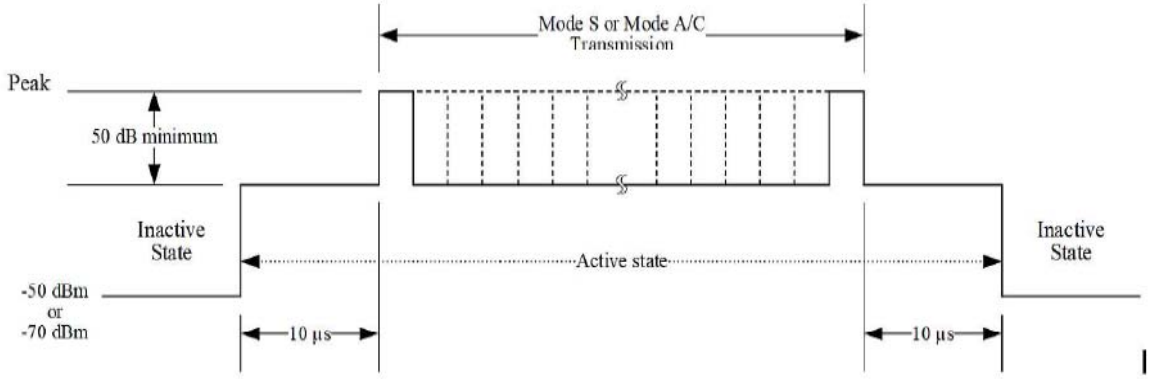


**Figure 3-11 Unwanted output power**

**Table 3-3. Field definitions**

| *Field* | | *Format* | | |
|---|---|---|---|---|
| *Designator* | *Function* | *UF* | *DF* | *Reference* |
| AA | Address announced | | 11, 17, 18 | 3.1.2.5.2.2.2 |
| AC | Altitude code | | 4, 20 | 3.1.2.6.5.4 |
| AF | Application field | | 19 | 3.1.2.8.8.2 |
| AP | Address/parity | All | 0, 4, 5, 16, 20, 21, 24 | 3.1.2.3.2.1.3 |
| AQ | Acquisition | 0 | | 3.1.2.8.1.1 |
| CA | Capability | | 11, 17 | 3.1.2.5.2.2.1 |
| CC | Cross-link capability | | 0 | 3.1.2.8.2.3 |
| CF | Control field | | 18 | 3.1.2.8.7.2 |
| CL | Code label | 11 | | 3.1.2.5.2.1.3 |
| DF | Downlink format | | All | 3.1.2.3.2.1.2 |
| DI | Designator identification | 4, 5, 20, 21 | | 3.1.2.6.1.3 |
| DP | Data parity | | 20, 21 | 3.1.2.3.2.1.5 |
| DR | Downlink request | | 4, 5, 20, 21 | 3.1.2.6.5.2 |
| DS | Data selector | 0 | | 3.1.2.8.1.3 |
| FS | Flight status | | 4, 5, 20, 21 | 3.1.2.6.5.1 |
| IC | Interrogator code | 11 | | 3.1.2.5.2.1.2 |
| ID | Identity | | 5, 21 | 3.1.2.6.7.1 |
| KE | Control, ELM | | 24 | 3.1.2.7.3.1 |
| MA | Message, Comm-A | 20, 21 | | 3.1.2.6.2.1 |
| MB | Message, Comm-B | | 20, 21 | 3.1.2.6.6.1 |
| MC | Message, Comm-C | 24 | | 3.1.2.7.1.3 |
| MD | Message, Comm-D | | 24 | 3.1.2.7.3.3 |
| ME | Message, extended squitter | | 17, 18 | 3.1.2.8.6.2 |
| MU | Message, ACAS | 16 | | 4.3.8.4.2.3 |
| MV | Message, ACAS | | 16 | 3.1.2.8.3.1<br>4.3.8.4.2.4 |
| NC | Number of C-segment | 24 | | 3.1.2.7.1.2 |
| ND | Number of D-segment | | 24 | 3.1.2.7.3.2 |
| PC | Protocol | 4, 5, 20, 21 | | 3.1.2.6.1.1 |
| PI | Parity/interrogator identifier | | 11, 17, 18 | 3.1.2.3.2.1.4 |
| PR | Probability of reply | 11 | | 3.1.2.5.2.1.1 |
| RC | Reply control | 24 | | 3.1.2.7.1.1 |
| RI | Reply information | | 0 | 3.1.2.8.2.2 |
| RL | Reply length | 0 | | 3.1.2.8.1.2 |
| RR | Reply request | 4, 5, 20, 21 | | 3.1.2.6.1.2 |
| SD | Special designator | 4, 5, 20, 21 | | 3.1.2.6.1.4 |
| UF | Uplink format | All | | 3.1.2.3.2.1.1 |
| UM | Utility message | | 4, 5, 20, 21 | 3.1.2.6.5.3 |
| VS | Vertical status | | 0 | 3.1.2.8.2.1 |

**Table 3-4. Subfield definitions**

| *Subfield* | | | |
|---|---|---|---|
| *Designator* | *Function* | *Field* | *Reference* |
| ACS | Altitude code subfield | ME | 3.1.2.8.6.3.1.2 |
| AIS | Aircraft identification subfield | MB | 3.1.2.9.1.1 |
| BDS 1 | Comm-B data selector subfield 1 | MB | 3.1.2.6.11.2.1 |
| BDS 2 | Comm-B data selector subfield 2 | MB | 3.1.2.6.11.2.1 |
| IDS | Identifier designator subfield | UM | 3.1.2.6.5.3.1 |
| IIS | Interrogator identifier subfield | SD | 3.1.2.6.1.4.1 a) |
| | | UM | 3.1.2.6.5.3.1 |
| LOS | Lockout subfield | SD | 3.1.2.6.1.4.1 d) |
| LSS | Lockout surveillance subfield | SD | 3.1.2.6.1.4.1 g) |
| MBS | Multisite Comm-B subfield | SD | 3.1.2.6.1.4.1 c) |
| MES | Multisite ELM subfield | SD | 3.1.2.6.1.4.1 c) |
| OVC | Overlay control | SD | 3.1.2.6.1.4.1.i) |
| RRS | Replay request subfield | SD | 3.1.2.6.1.4.1 e) and g) |
| RSS | Reservation status subfield | SD | 3.1.2.6.1.4.1 c) |
| SCS | Squitter capability subfield | MB | 3.1.2.6.10.2.2.1 |
| SIC | Surveillance identifier capability | MB | 3.1.2.6.10.2.2.1 |
| SIS | Surveillance identifier subfield | SD | 3.1.2.6.1.4.1 g) |
| SRS | Segment request subfield | MC | 3.1.2.7.7.2.1 |
| SSS | Surveillance status subfield | ME | 3.1.2.8.6.3.1.1 |
| TAS | Transmission acknowledgement subfield | MD | 3.1.2.7.4.2.6 |
| TMS | Tactical message subfield | SD | 3.1.2.6.1.4.1 d) |

**3.1.2.3.3.2 AP and PI field generation**. Different address parity sequences shall be used for the uplink and downlink.

**The code used in uplink** AP field generation shall be formed as specified below from either the aircraft 0a0ddres (3.1.2.4.1.2.3.1.1), theall-call address (3.1.2.4.1.2.3.1.2) or the broadcast address (3.1.2.4.1.2.3.1.3).

**The code used in downlink** AP field generation shall be formed directly from the sequence of 24 Mode S address bits ($a_1$, $a_2$,...,$a_{24}$), where $a_i$ is the i-th bit transmitted in the aircraft address (AA) field of an all-call reply (3.1.2.5.2.2.2).

The code used in downlink PI field generation shall be formed by a sequence of 24 bits ($a_1$, $a_2$,..., $a_{24}$), where the first 17 bits are ZEROs, the next three bits are a replica of the code label (CL) field (3.1.2.5.2.1.3) and the last four bits are a replica of the interrogator code (IC) field (3.1.2.5.2.1.2).

A modified sequence ($b_1$, $b_2$, ..., $b_{24}$) shall be used for uplink AP field generation. Bit bi is the coefficient of x48-i in the polynomial G(x) A(x), where:

$$A(x) = a_1x^{23} + a_2x^{22} + \ldots + a_{24}$$

and G(x) is as defined in 3.1.2.3.3.1.2.

In the aircraft address ai shall be the i-th bit transmitted in the AA field of an all-call reply. In the all-call and broadcast addresses ai shall equal 1 for all values of i.

**3.1.2.3.3.2.1 Uplink transmission order.** The sequence of bits transmitted in the uplink AP field is:

$$t_{k+1}, t_{k+2} \ldots t_{k+24}$$

where the bits are numbered in order of transmission, starting with k + 1.

In uplink transmissions:

$$t_{k+i} = b_i \oplus p_i$$

where "$\oplus$" prescribes modulo-2 addition: i equals 1 is the first bit transmitted in the AP field.

**3.1.2.3.3.2.2 Downlink transmission order.** The sequence of bits transmitted in the downlink AP and PI field is:

$$t_{k+1}, t_{k+2} \ldots t_{k+24}$$

where the bits are numbered in order of transmission, starting with k + 1. In downlink transmissions:

$$t_{k+i} = a_i \oplus p_i$$

where "⊕" prescribes modulo-2 addition: i equals 1 is the first bit transmitted in the AP or PI field.

### 3.1.2.4 GENERAL INTERROGATION-REPLYPROTOCOL

**3.1.2.4.1 Transponder transaction cycle**. A transponder transaction cycle shall begin when the SSR Mode S transponder has recognized an interrogation. The transponder shall then evaluate the interrogation and determine whether it shall be accepted. If accepted, it shall then process the received interrogation and generate a reply, if appropriate. The transaction cycle shall end when:

a) Anyone of the necessary conditions for acceptance has not been met, or

b) an interrogation has been accepted and the transponder has either:

1) completed the processing of the accepted interrogation if no reply is required, or

2) completed the transmission of a reply.

A new transponder transaction cycle shall not begin until the previous cycle has ended.

**3.1.2.4.1.1 Interrogation recognition**. SSR Mode S transponders shall be capable of recognizing the following distinct types of interrogations:

a) Modes A and C;
b) intermode; and
c) Mode S.

**3.1.2.4.1.1.1 Mode A and Mode C interrogation recognition**. A Mode A or Mode C interrogation shall be recognized when a P1-P3 pulse pair meeting the requirements of 3.1.1.4 has been received, and the leading edge of a P4 pulse with an amplitude that is greater than a level 6 dB below the amplitude of P3 is not received within the interval from 1.3 to 2.7 microseconds following the leading edge of P3.

**3.1.2.4.1.1.2 Intermode interrogation recognition**.

**3.1.2.4.1.1.2.1** A Mode A/C-only all-call interrogation shall be recognized when the requirements of 3.1.1.7.1 are met with a P4 pulse being of any duration greater than 0.7 microsecond and occurring 2 ± 0.1 microsecond from P3

**3.1.2.4.1.1.2.2** A Mode A/C-only all-call interrogation shall be recognized if the received power of P4 is above P3 minus 1 dB at any signal level of P1 – P3 from MTL+1 dB to –21 dBm.

**3.1.2.4.1.1.2.3** An interrogation shall not be recognized as an intermode interrogation if:

a) the received amplitude of the pulse in the P4 position is smaller than 6 dB below the amplitude of P3;or

b) the pulse interval between P3 and P4 is larger than 2.7 microseconds or shorter than 1.3 microseconds; or

c) the received amplitude of P1 and P3 is between MTL and -45 dBm and the pulse duration of P1 or P3 is less than 0.3 microsecond; or

d) the transponder is in suppression(3.1.2.4.2). or

e) the pulse interval between P1 and P3 differs from the nominal spacing by 1.0 microsecond or more; or

f) the pulse duration of P4 is less than 0.3 microsecond.

**3.1.2.4.1.1.3 Mode S interrogation recognition**. A Mode S interrogation shall be recognized when a P6 pulse is received with a sync phase reversal within the interval from 1.20 to 1.30 microseconds following the leading edge of P6. A Mode S interrogation shall not be recognized if a sync phase reversal is not received within the interval from 1.05 to 1.45 microseconds following the leading edge ofP6.

**3.1.2.4.1.2 Interrogation acceptance**. Recognition according to 3.1.2.4.1 shall be a prerequisite for acceptance of any interrogation.

**3.1.2.4.1.2.1 Mode A and Mode C interrogation acceptance.** Mode A and Mode C interrogations shall be accepted when recognized (3.1.2.4.1.1.1).

**3.1.2.4.1.2.2 Intermode interrogation acceptance**

**3.1.2.4.1.2.2.1 Mode A/C/S all-call interrogation acceptance**.

**3.1.2.4.1.2.2.2 Mode A/C-only all-call interrogation acceptance**. A Mode A/C- only all-call interrogation shall not be accepted by a Mode S transponder.

**3.1.2.4.1.2.3 Mode S interrogation acceptance**. A Mode S interrogation shall

only be accepted if:

a) the transponder is capable of processing the uplink format (UF) of the interrogation(3.1.2.3.2.1.1);

b) the address of the interrogation matches one of the addresses as defined in 3.1.2.4.1.2.3.1 implying that parity is established, as defined in3.1.2.3.3;

c) no all-call lockout condition applies, as defined in 3.1.2.6.9;and

d) the transponder is capable of processing the uplinked data and presenting it at an output interface as prescribed in 3.1.2.10.5.2.2.1.

**3.1.2.4.1.2.3.1** **Addresses**. Mode S interrogations shall contain either:

a) aircraft address; or

b) the all-call address; or

c) the broadcast address.

**3.1.2.4.1.2.3.1.1** **Aircraft address**. If the aircraft's address is identical to the address extracted from a received interrogation according to the procedure of 3.1.2.3.3.2 and 3.1.2.3.3.2.1, the extracted address shall be considered correct for purposes of Mode S interrogation acceptance.

**3.1.2.4.1.2.3.1.2** **All-call address**. A Mode S-only all-call interrogation (uplink format UF = 11) shall contain an address, designated the all-call address, consisting of twenty-four consecutive ONEs. If the all-call address is extracted from a received interrogation with format UF = 11 according to the procedure of 3.1.2.3.3.2 and 3.1.2.3.3.2.1, the address shall be considered correct for Mode S-only all-call interrogation acceptance.

**3.1.2.4.1.2.3.1.3** **Broadcast address**. To broadcast a message to all Mode S transponders within the interrogator beam, a Mode S interrogation uplink format 20 or 21 shall be used and an address of twenty-four consecutive ONEs shall be substituted for the aircraft address. If the UF code is 20 or 21 and this broadcast address is extracted from a received interrogation according to the procedure of 3.1.2.3.3.2 and 3.1.2.3.3.2.1, the address shall be considered

correct for Mode S broadcast interrogation acceptance.

**3.1.2.4.1.3** **Transponder replies**. Mode S transponders shall transmit the following reply types:

a) Mode A and Mode C replies; and

b) Mode S replies.

**3.1.2.4.1.3.1** **Replies to intermode interrogations**. A Mode S reply with downlink format 11 is transmitted in accordance with the provisions of 3.1.2.5.2.2 when a Mode A/C/S all-call interrogation has been accepted by a transponder certified before 1January 2020.

*Note.— Since Mode S transponders do not accept Mode A/C-only all-call interrogations, no reply is generated.*

**3.1.2.4.1.3.2** **Replies to Mode S interrogations**. The information content of a Mode S reply shall reflect the conditions existing in the transponder after completion of all processing of the interrogation eliciting that reply. The correspondence between uplink and downlink formats shall be as summarized in Table 3-5.

**3.1.2.4.1.3.2.1** Replies to SSR Mode S-only all-call interrogations. The downlink format of the reply to a Mode S-only all-call interrogation (if required) shall be DF = 11. The reply content and rules for determining the requirement to reply shall be as defined in 3.1.2.5.

**3.1.2.4.1.3.2.2** Replies to surveillance and standard length communications interrogations. A Mode S reply shall be transmitted when a Mode S interrogation with UF=4, 5, 20or 21 and an aircraft address has been accepted. The contents of these interrogations and replies shall be as defined in3.1.2.6.

**3.1.2.4.1.3.2.3** Replies to extended length communications interrogations.
A series of Mode S replies ranging in number from 0 to 16 shall be transmitted when a Mode S interrogation with UF = 24 has been accepted. The downlink format of the reply (if any) shall be DF = 24. Protocols defining the number and content of the replies shall be as defined in 3.1.2.7.

**3.1.2.4.1.3.2.4** Replies to air-air surveillance interrogations. A Mode S reply shall be transmitted when a Mode S interrogation with UF=0 and an aircraft address has been accepted. The contents of these interrogations and replies shall be as defined in 3.1.2.8.

Table 3-5. Interrogation — reply protocol summary

| *Interrogation UF* | *Special conditions* | *Reply DF* |
|---|---|---|
| 0 | RL (3.1.2.8.1.2) equals 0 | 0 |
| | RL (3.1.2.8.1.2) equals 1 | 16 |
| 4 | RR (3.1.2.6.1.2) less than 16 | 4 |
| | RR (3.1.2.6.1.2) equal to or greater than 16 | 20 |
| 5 | RR (3.1.2.6.1.2) less than 16 | 5 |
| | RR (3.1.2.6.1.2) equal to or greater than 16 | 21 |
| 11 | Transponder locked out to interrogator code, IC (3.1.2.5.2.1.2) | No reply |
| | Stochastic reply test fails (3.1.2.5.4) | No reply |
| | Otherwise | 11 |
| 20 | RR (3.1.2.6.1.2) less than 16 | 4 |
| | RR (3.1.2.6.1.2) equal to or greater than 16 | 20 |
| | AP contains broadcast address (3.1.2.4.1.2.3.1.3) | No reply |
| 21 | RR (3.1.2.6.1.2) less than 16 | 5 |
| | RR (3.1.2.6.1.2) equal to or greater than 16 | 21 |
| | AP contains broadcast address (3.1.2.4.1.2.3.1.3) | No reply |
| 24 | RC (3.1.2.7.1.1) equals 0 or 1 | No reply |
| | RC (3.1.2.7.1.1) equals 2 or 3 | 24 |

### 3.1.2.4.2 SUPPRESSION

**3.1.2.4.2.1** **Effects of suppression**. A Mode S-capable transponder in suppression (3.1.1.7.4) shall not recognize Mode A, Mode C or intermode interrogations if either the P1 pulse alone or both the P1 and P3 pulses of the interrogation are received during the suppression interval. Suppression shall not affect the recognition of, acceptance of, or replies to Mode S interrogations.

**3.1.2.4.2.2** **Suppression pairs.** The two-pulse Mode A/C suppression pair defined in 3.1.1.7.4.1 shall initiate suppression in a Mode S transponder regardless of the position of the pulse pair in a group of pulses, provided the transponder is not already suppressed or in a transaction cycle.

**3.1.2.4.2.3** Declaration of aircraft status

3.1.2.4.2.3.1 Declared air/ground status determination. Declared air/ground status shall be restricted to “on-the-ground”, “airborne” or “unknown”.

3.1.2.4.3.1.1 If an automatic means of determining the on-the-ground condition is available and indicates “on-the ground”, the declared air/ground status shall be “on-the-ground”.

3.1.2.4.3.1.2 If an automatic means of determining the on-the-ground condition is available and does not indicate “on-the ground”, the declared air/ground status shall be “airborne”.

3.1.2.4.3.1.3 If an automatic means of determining the on-the-ground condition is unavailable, the declared air/ground status shall be “unknown”.

Note.— The declared air/ground status may be set by air/ground data input (see 3.1.2.10.5.1.3) provided by an automatic means of determining the on-the-ground condition. Automatic means of determining the on-the-ground condition may include, for example, a weight on wheels switch, a strut switch or an airframe-specific air/ground algorithm output.

3.1.2.4.3.2 Declared air/ground status validation. Aircraft with an automatic means of determining the on-the-ground condition and whose transponders have access to at least one of ground speed, radio altitude or airspeed, shall perform the following validation check:

3.1.2.4.3.2.1 If an automatic means of determining the on-the-ground condition is available and indicates “on-the-ground”, the declared air/ground status shall be changed to “airborne” if:

Ground Speed > Speed Threshold OR Airspeed > Speed Threshold OR Radio Altitude > 50 feet

Where Speed Threshold is the lesser of 100 knots or the typical rotation speed of the aircraft (if available).

Note 1.— If an automatic means of determining the on-the-ground condition is not available or the declared air/ground status is “airborne”, no validation check is required.

Note 2.— Modern aircraft with integrated avionics suites commonly contain sophisticated algorithms for determining the declared air/ground status based on multiple aircraft sensors. These algorithms are customized to the airframe and designed to overcome individual sensor failures. These algorithms are an acceptable means to determine the declared air/ground status and do not require the additional validation in this section.

3.1.2.4.3.3 Effective air/ground state determination. Effective air/ground state shall be restricted to “on-the-ground” or “airborne”.

3.1.2.4.3.3.1 When the declared air/ground status is “airborne” or “unknown”, the effective air/ground state shall be “airborne”.

3.1.2.4.3.3.2 When the declared air/ground status is “on-the-ground”, the effective air/ground state shall be “on-the-ground”.

### 3.1.2.5 INTERMODE AND MODE S ALL-CALLTRANSACTIONS

#### 3.1.2.5.1 Intermode Transactions

#### 3.1.2.5.2 Mode S-only All Call Transactions

**3.1.2.5.2.1** Mode S-only all-call transactions, uplink format11

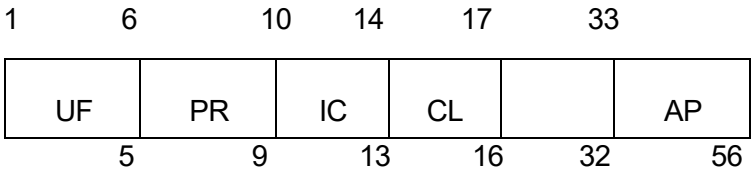


The format of this interrogation shall consist of these fields:

| **Field** | **Reference** |
|---|---|
| UF uplink format | 3.1.2.3.2.1.1 |
| PR probability of reply | 3.1.2.5.2.1.1 |
| I: Probability of reply C interrogator code | 3.1.2.5.2.1.2 |
| CL code label | 3.1.2.5.2.1.3 |
| spare -- 16 bits | |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.5.2.1.1 PR: Probability of reply.** This 4-bit (6-9) uplink field shall contain commands to the transponder specifying the probability of reply to that interrogation (3.1.2.5.4). Codes are as follows:

| | |
|---|---|
| 0 | signifies reply with probability of1 |
| 1 | signifies reply with probability of1/2 |
| 2 | signifies reply with probability of1/4 |
| 3 | signifies reply with probability of1/8 |
| 4 | signifies reply with probability of1/16 |
| 5,6, 7 | not assigned |
| 8 | signifies disregard lockout, reply with probability of1 |
| 9 | signifies disregard lockout, reply with probability of1/2 |
| 10 | signifies disregard lockout, reply with probability of1/4 |
| 11 | signifies disregard lockout, reply with probability of1/8 |
| 12 | signifies disregard lockout, reply with probability of 1/16 |
| 13,14,15 | not assigned. |

**3.1.2.5.2.1.2 IC: Interrogator code**. This 4-bit (10-13) uplink field shall contain either the 4-bit interrogator identifier code (3.1.2.5.2.1.2.3) or the lower 4 bits of the 6-bit surveillance identifier code (3.1.2.5.2.1.2.4) depending on the value of the CL field (3.1.2.5.2.1.3).

**3.1.2.5.2.1.2.1** It is recommended that whenever possible an interrogator should operate using a single interrogator code.

**3.1.2.5.2.1.2.2** The use of multiple interrogator codes by one interrogator. An interrogator shall not interleave Mode S-only all-call interrogations using different interrogator codes.

An interrogator may use more than one interrogator code and may use different interrogator codes in different interrogations. An interrogator shall only use multiple interrogator codes on a sector

basis and shall not use more than two interrogator codes.

*Note.— An explanation of RF interference issues, sector size and impact on data link transactions is presented in the Aeronautical Surveillance Manual (ICAO Doc 9924).*

**3.1.2.5.2.1.2.3 II: Interrogator identifier.** This 4-bit value shall define an interrogator identifier (II) code. These II codes shall be assigned to interrogators in the range from 0 to 15. When multiple II codes are assigned to one interrogator only, one II code shall be used for full data link purposes. Limited data link activity including single segment Comm-A, uplink and downlink broadcast protocols and GICB extraction may be performed by both II codes.

**3.1.2.5.2.1.2.4 SI: Surveillance identifier**. This 6-bit value shall define a surveillance identifier (SI) code. These SI codes shall be assigned to interrogators in the range from 1 to 63. The SI code value of 0 shall not be used. The SI codes shall be used with the multisite lockout protocols (3.1.2.6.9.1). The SI codes shall not be used with the multisite communications protocols (3.1.2.6.11.3.2, 3.1.2.7.4 or3.1.2.7.7).

**3.1.2.5.2.1.3 CL: Code label**. This 3-bit (14-16) uplink field shall define the contents of the IC field.

Coding (in binary)

000 signifies that the IC field contains the II code
001 signifies that the IC field contains SI codes 1 to 15
010 signifies that the IC field contains SI codes 16 to 31
011 signifies that the IC field contains SI codes 32 to 47
100 signifies that the IC field contains SI codes 48 to 63

The other values of the CL field shall not be used.

**3.1.2.5.2.1.3.1 Surveillance identifier (SI)** code capability report. Transponders which process the SI codes (3.1.2.5.2.1.2.4) shall report this capability by setting bit 35 to 1 in the surveillance identifier capability (SIC) subfield of the MB field of the data link capability report (3.1.2.6.10.2.2).

**3.1.2.5.2.1.4 Operation based on lockout override for an interrogator without an assigned interrogator code**

**3.1.2.5.2.1.4.1 Maximum Mode S-only all-call interrogation rate.** The maximum rate of Mode S-only all-call interrogations made by an interrogator using acquisition based on lock out override shall depend on the reply probability as follows:

a) for a reply probability equal to1.0:

the smaller of 3 interrogations per 3 dB beam dwell or 30 interrogations per second;

b) for a reply probability equal to0.5:

the smaller of 5 interrogations per 3 dB beam dwell or 60 interrogations per second; and

c) for a reply probability equal to 0.25 or less:

the smaller of 10 interrogations per 3 dB beam dwell or 125 interrogations per second.

*Note.— These limits have been defined in order to minimize the RF pollution generated by such a method while keeping a minimum of replies to allow acquisition of aircraft within a beam dwell.*

**3.1.2.5.2.1.4.2 Recommendation.—** *Passive acquisition without using all-call interrogations should be used in the place of lock out override.*

*Note.—* The Aeronautical Surveillance Manual *(Doc 9924) provides guidance on different passive acquisition methods.*

***3.1.2.5.2.1.5 Supplementary acquisition***

**3.1.2.5.2.1.5.1 Lockout within a beam dwell**

When lockout is used to supplement the acquisition Method described in 3.1.2.5.2.1.4, all aircraft within the beam dwell of the aircraft being acquired should be commanded to lockout, not just those in the garble zone.

**3.1.2.5.2.1.5.2 Duration of lockout**

**3.1.2.5.2.1.5.2.1** Interrogators performing supplementary acquisition shall perform acquisition by transmitting a lockout command for no more than two consecutive scans to each of the aircraft already acquired in the beam dwell containing the garble zone and shall not repeat it before 48 seconds have elapsed.

**3.1.2.5.2.1.5.2.2** Mode S- only all-call interrogations for the purpose of supplementary acquisition should take place over a maximum of 18 seconds.

**3.1.2.5.2.2 All-call reply, downlink format 11**

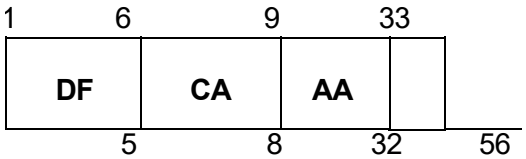

The reply to the Mode S-only all-call interrogation shall be the Mode S all-call reply, downlink format 11. The format of this reply shall consist of these fields:

Note.— Mode S all-call reply may be transmitted by transponders certified before 1 January 2020 in response to Mode A/C/S all-call interrogation (see 2.1.5.4.4).

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| CA capability | 3.1.2.5.2.2.1 |
| AA address announced | 3.1.2.5.2.2.2 |
| PI parity/interrogator identifier | 3.1.2.3.2.1.4 |

**3.1.25221** **CA: Capability**. This 3-bit (6-8) downlink field shall contain an encoded definition of the communications capability of the transponder and shall be used in the all-call reply format (DF = 11) and DF=17.

**Coding**

0 signifies no communications capability (surveillance only), and no ability to set CA code 7 and either “airborne” or “on-the-ground”

1 reserved

2 reserved

3 reserved

4 signifies at least Comm-A and Comm-B capability and ability to set CA code 7 and a declared air/ground status of “on-the-ground” (see 3.1.2.8.6.7)
signifies at least Comm-A and Comm-B capability and ability to set C code 7 and a declared air/ground status of “airborne” (see 3.1.2.8.6.7)

5 signifies at least Comm-A and Comm-B capability and ability to set CA code 7 and a declared air/ground status of “unknown” (see 3.1.2.8.6.7)

6 signifies the DR field is not equal to 0 or the FS field equals 2, 3, 4 or 5

Data link capability reports (3.1.2.6.10.2.2) shall be available from aircraft installations that set CA code 4, 5, 6 or 7.

**3.1.25222** **AA: Address announced**. This 24-bit (9-32) downlink field shall contain the aircraft address which provides unambiguous identification of the aircraft.

**3.1.2.5.3** **Lockout protocol.** The all-call lockout protocol defined in 3.1.2.6.9 shall be used by the interrogator with respect to an aircraft once the address of that specific aircraft has been acquired by an interrogator provided that:

— the interrogator is using an IC code different from zero; and

— the aircraft is located in an area where the interrogator is authorized to use lockout..

**3.1.2.5.4** **Stochastic all-call protocol**. The transponder shall execute a random

process upon acceptance of a Mode S-only all-call with a PR code equal to 1 to 4 or 9 to 12. A decision to reply shall be made in accordance with the probability specified in the interrogation. A transponder shall not reply if a PR code equal to 5, 6, 7, 13, 14 or 15 is received(3.1.2.5.2.1.1).

### 3.1.2.6 ADDRESSED SURVEILLANCE AND STANDARD LENGTH COMMUNICATIONTRANSACTIONS

### 3.1.2.6.1 SURVEILLANCE, ALTITUDE REQUEST, UPLINK FORMAT 4

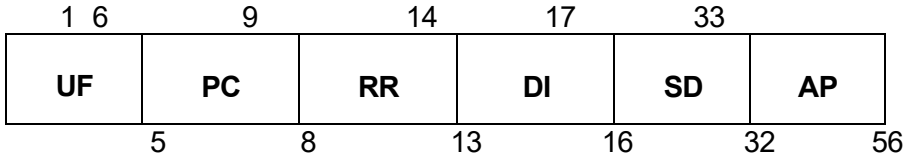


The format of this interrogation shall consist of these fields:

| Field | Reference |
|---|---|
| UF uplink format | 3.1.2.3.2.1.1 |
| PC protocol | 3.1.2.6.1.1 |
| RR reply request | 3.1.2.6.1.2 |
| DI designator identification | 3.1.2.6.1.3 |
| SD special designator | 3.1.2.6.1.4 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.6.1.1** **PC: Protocol**. This 3-bit, (6-8) uplink field shall contain operating commands to the transponder. The PC field values 2 through 7 shall be ignored and the values 0 and 1 shall be processed for surveillance or Comm-A interrogations containing DI = 3 (3.1.2.6.1.4.1).

Coding

0 signifies no action
1 signifies non-selective all-call lockout (3.1.2.6.9.2)
2 not assigned
3 not assigned
4 signifies close out Comm-B (3.1.2.6.11.3.2.3)
5 signifies close out uplink ELM(3.1.2.7.4.2.8)
6 signifies close out downlink ELM(3.1.2.7.7.3)
7 not assigned

**3.1.2.6.1.2** **RR: Reply request**. This 5-bit, (9-13) uplink field shall command the length and content of a requested reply.

The last four bits of the 5-bit RR code, transformed into their decimal equivalent, shall designate the BDS 1 code (3.1.2.6.11.2 or 3.1.2.6.11.3) of the requested Comm-B message if the most significant bit (MSB) of the RR code is 1 (RR is equal to or greater than 16).

Coding

RR = 0-15 shall be used to request a reply with surveillance format (DF=4 or 5);

RR = 16-31 shall be used to request a reply with Comm-B format (DF = 20 or 21);

RR = 16 shall be used to request transmission of an air-initiated Comm-B message according to3.1.2.6.11.3 or to request the extraction of a Comm-B broadcast message according to 3.1.2.6.11.4;

RR = 17 shall be used to request a data link capability report according to 3.1.2.6.10.2.2;

RR = 18 shall be used to request aircraft identification according to 3.1.2.9;

19-31 are not assigned in section 3.1

**3.1.2.6.1.3 DI: Designator identification.** This 3-bit (14-16) uplink field shall identify the structure of the SD field(3.1.2.6.1.4).

0 Coding signifies SD not assigned except for IIS, bits 21-27 and 29-32 are not assigned, and bit 28 contains the “OVC” (overlay control - 3.1.2.6.1.4.1.i).

1 signifies SD contains multisite and communications control information

2 signifies SD contains control data for extended squitter

3 signifies SD contains SI multisite lockout, broadcast and GICB control information, and bit 28 contains the “OVC” (overlay control- 3.1.2.6.1.4.1.i).

4-6 signifies SD not assigned

7 signifies SD contains extended data readout request, multisite and communications control information, and bit 28 contains the “OVC” (overlay control - 3.1.2.6.1.4.1.i)

**3.1.2.6.1.4 SD: Special designator**. This 16-bit (17-32) uplink field shall contain control codes which depend on the coding in the DI field.

*Note.— The special designator (SD) field is provided to accomplish the transfer of multisite, lockout and communications control information from the ground station to the transponder*.

*DI CODE* *SD FIELD STRUCTURE*

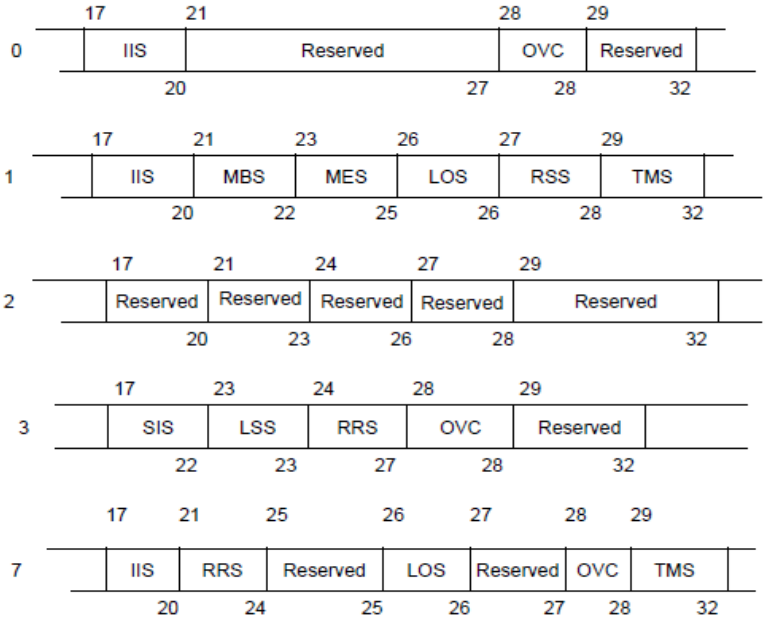

**3.1.2.6.1.4.1 Subfields in SD.** The SD field shall contain information as follows:

a) If DI = 0, 1 or7:

IIS, the 4-bit (17-20) interrogator identifier subfield shall contain the identifier code of the interrogator (3.1.2.5.2.1.2.3).

b) If DI =0:

bits 21-32 are not assigned.

c) If DI =1:

**MBS,** the 2-bit (21, 22) multisite Comm-B subfield shall have the following codes:

0 signifies no Comm-B action
1 signifies air-initiated Comm-B reservation request (3.1.2.6.11.3.1)
2 signifies Comm-B closeout(3.1.2.6.11.3.2.3)
3 not assigned.

**MES,** the 3-bit (23-25) multisite ELM subfield shall contain reservation and closeout commands for ELM as follows:

0 signifies no ELM action
1 signifies uplink ELM reservation request(3.1.2.7.4.1)
2 signifies uplink ELM closeout(3.1.2.7.4.2.8)
3 signifies downlink ELM reservation request(3.1.2.7.7.1.1)
4 signifies downlink ELM closeout(3.1.2.7.7.3)
5 signifies uplink ELM reservation request and downlink ELM closeout
6 signifies uplink ELM closeout and downlink ELM reservation request
7 signifies uplink ELM and downlink ELM closeouts.

**RSS,** the 2-bit (27, 28) reservation status subfield shall request the transponder to report its reservation status in the UM field. The following codes have been assigned:

0 signifies no request
1 signifies report Comm-B reservation status in UM
2 signifies report uplink ELM reservation status in UM
3 signifies report downlink ELM reservation status in UM.

d) If DI = 1 or7:

**LOS**, the 1-bit (26) lockout subfield, if set to 1, shall signify a multisite lockout command from the interrogator indicated in IIS. LOS set to 0, shall be used to signify that no change in lockout state is commanded.

**TMS,** the 4-bit (29-32) tactical message subfield shall contain communications control information used by the data link avionics.

e) If DI =7:

**RRS,** the 4-bit (21-24) reply request subfield in SD shall give the BDS2 code of a requested Comm-B reply.

Bits 25, 27 and 28 are not assigned.

f) If DI =2:

SD is not assigned. The SD field when DI = 2 was previously used to control the squitter format type and rate reported by the transponder through the deprecated type control subfield (TCS), rate control subfield (RCS), and squitter antenna subfield (SAS) commands.

g) If DI =3:

**SIS**, the 6-bit (17-22) surveillance identifier subfield in SD shall contain the surveillance identifier code of the interrogator (3.1.2.5.2.1.2.4).

**LSS,** the 1-bit (23) lockout surveillance subfield, if set to 1, shall signify a multisite lockout command from the interrogator indicated in SIS. If set to 0, LSS shall signify that no change in lockout state is commanded.

**RRS,** the 4-bit (24-27) reply request subfield in SD shall contain the BDS2 code of a requested GICB register.

Bits 28 to 32 are not assigned.

h) If DI=4, 5 or 6 then the SD field has no meaning and shall not impact other transaction cycle protocols. These DI codes remain reserved until future assignment of the SD field.

i) If DI = 0, 3, or7:

ii)

In addition to the requirements provided above, the “SD” shall contain the following: “OVC”: The 1-bit (bit 28) “overlay control” subfield in “SD” is used by the interrogator to command that the data parity (“DP” - 3.1.2.3.2.1.5) be overlaid upon the resulting reply to the interrogation in accordance with paragraph 3.1.2.6.11.2.5.

**3.1.2.6.1.5 PC and SD field processing.** When DI = 1, PC field processing shall be completed before processing the SD field.

### 3.1.2.6.2 COMM-A ALTITUDE REQUEST, UPLINK FORMAT20

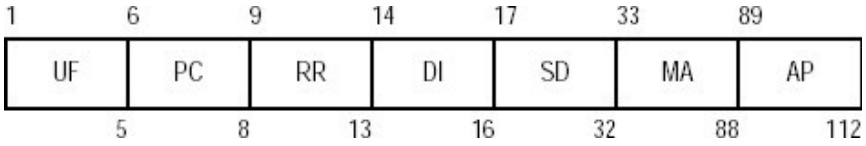


The format of this interrogation shall consist of these fields:

| Field | Reference |
|---|---|
| UF uplink format | 3.1.2.3.2.1.1 |
| PC protocol | 3.1.2.6.1.1 |
| RR reply request | 3.1.2.6.1.2 |
| DI designator identification | 3.1.2.6.1.3 |
| SD special designator | 3.1.2.6.1.4 |
| MA message, Comm-A | 3.1.2.6.2.1 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.6.2.1 MA: Message, Comm-A**. This 56-bit (33-88) field shall contain a data link message to the aircraft.

### 3.1.2.6.3 SURVEILLANCE IDENTITY REQUEST, UPLINK FORMAT5

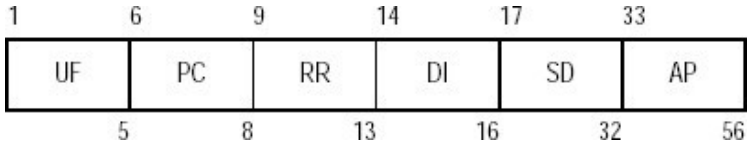


The format of this interrogation shall consist of these fields:

| Field | Reference |
|---|---|
| UF uplink format | 3.1.2.3.2.1.1 |
| PC protocol | 3.1.2.6.1.1 |
| RR reply request | 3.1.2.6.1.2 |
| DI designator identification | 3.1.2.6.1.3 |
| SD special designator | 3.1.2.6.1.4 |
| AP address/parity | 3.1.2.3.2.1.3 |

### 3.1.2.6.4 COMM-A IDENTITY REQUEST, UPLINK FORMAT21

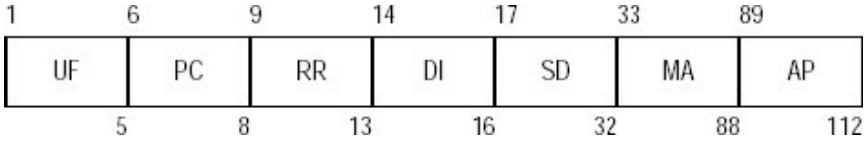


The format of this interrogation shall consist of these fields:

| Field | Reference |
|---|---|
| UF Uplink format | 3.1.2.3.2.1.1 |
| PC protocol | 3.1.2.6.1.1 |
| RR reply request | 3.1.2.6.1.2 |
| DI designator identification | 3.1.2.6.1.3 |
| SD special designator | 3.1.2.6.1.4 |
| MA message, Comm-A | 3.1.2.6.2.1 |
| AP address/parity | 3.1.2.3.2.1.3 |

### 3.1.2.6.5 SURVEILLANCE ALTITUDE REPLY, DOWNLINK FORMAT4

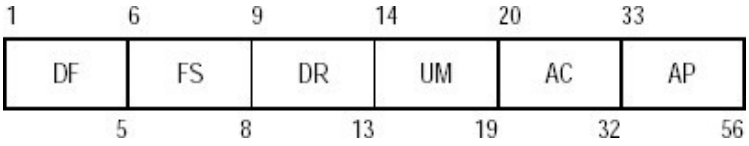


This reply shall be generated in response to an interrogation UF 4 or 20 with an RR field value less than 16. The format of this reply shall consist of these fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| FS flight status | 3.1.2.6.5.1 |
| DR downlink request | 3.1.2.6.5.2 |
| UM utility message | 3.1.2.6.5.3 |
| AC altitude code | 3.1.2.6.5.4 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.6.5.1** **FS: Flight status**. This 3-bit (6-8) downlink field shall contain the following information:

**Coding**

0 signifies no alert and no SPI, vertical status (VS) indicates “airborne”
1 signifies no alert and no SPI, VS indicates “on-the-ground”
2 signifies alert, no SPI, VS indicates “airborne”
3 signifies alert, no SPI, VS indicates “on-the-ground”
4 signifies alert and SPI, VS indicates “airborne” or “on-the-ground”
5 signifies no alert and SPI, VS indicates “airborne” or “on-the-ground”
6 reserved
7 not assigned

**3.1.2.6.5.2** **DR: Downlink request.** This 5-bit (9-13) downlink field shall contain requests to downlink information.

**Coding**

0 signifies no downlink request
1 signifies request to send Comm-B message
2 reserved for ACAS
3 reserved for ACAS
4 signifies Comm-B broadcast message 1available
5 signifies Comm-B broadcast message 2available
6 reserved for ACAS
7 reserved for ACAS
8-15 not assigned
16-31 see downlink ELM protocol (3.1.2.7.7.1) Codes
1-15 shall take precedence over codes16-31.

**3.1.2.6.5.3** **UM: Utility message**. This 6-bit (14-19) downlink field shall contain transponder communications status information as specified in 3.1.2.6.1.4.1 and3.1.2.6.5.3.1.

**3.1.2.6.5.3.1** Subfields in UM for multi site protocols

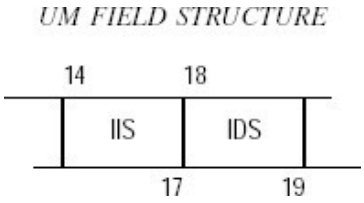


The following subfields shall be inserted by the transponder into the UM field of the reply if a surveillance or Comm-A interrogation (UF equals 4, 5, 20, 21) contains DI = 1 and RSS other than 0:

**IIS**: The 4-bit (14-17) interrogator identifier subfield reports the identifier of the interrogator that is reserved for multi site communications.

**IDS:** The 2-bit (18, 19) identifier designator subfield reports the type of reservation made by the interrogator identified in IIS.

Assigned coding is:

0 signifies no information
1 signifies IIS contains Comm-B II code
2 signifies IIS contains Comm-C II code
3 signifies IIS contains Comm-D II code.

**3.1.26.5.3.2** **Multisite reservation status**. The interrogator identifier of the ground station currently reserved for multisite Comm-B delivery (3.1.2.6.11.3.1) shall be transmitted in the IIS subfield together with code 1 in the IDS subfield if the UM content is not specified by the interrogation (when DI = 0 or 7, or when DI = 1 and RSS =0).

The interrogator identifier of the ground station currently reserved for downlink ELM delivery (3.1.2.7.6.1), if any, shall be transmitted in the IIS subfield together with code 3 in the IDS subfield if the UM content is not specified by the interrogation and there is no current Comm-B reservation.

**3.1.2.6.5.4** **AC: Altitude code**. This 13-bit (20-32) field shall contain altitude coded as follows:

a) Bit 26 is designated as the M bit, and shall be 0 if the altitude is reported in feet. M equals 1 shall be reserved to indicate that the altitude reporting is in metric units.

b) If M equals 0, then bit 28 is designated as the Q bit. Q equals 0 shall be used to indicate that the altitude is reported in 100-foot increments. Q equals 1 shall be used to indicate that the altitude is reported in 25-footincrements.

c) If the M bit (bit 26) and the Q bit (bit 28) equal 0, the altitude shall be coded according to the pattern for Mode C replies of 3.1.1.7.12.2.3. Starting with bit 20 the sequence shall be C1, A1, C2, A2, C4, A4, ZERO, B1, ZERO, B2, D2, B4, D4.

d) If the M bit equals 0 and the Q bit equals 1, the 11-bit field represented by bits 20 to 25, 27 and 29 to 32 shall represent a binary coded field with a least significant bit (LSB) of 25 ft. The binary value of the positive decimal integer “N” shall be encoded to report pressure-altitude in the range [(25 N - 1 000) plus or minus 12.5 ft]. The coding of 3.1.2.6.5.4 c) shall be used to report pressure-altitude above 50 187.5ft.

e) If the M bit equals 1, the 12-bit field represented by bits 20 to 25 and 27 to 32 shall be reserved for encoding altitude in metric units.

f) 0 shall be transmitted in each of the 13 bits of the AC field if altitude information is not available or if the altitude has been determined invalid.

**3.1.2.6.6** **COMM-B ALTITUDE REPLY, DOWNLINK FORMAT 20**

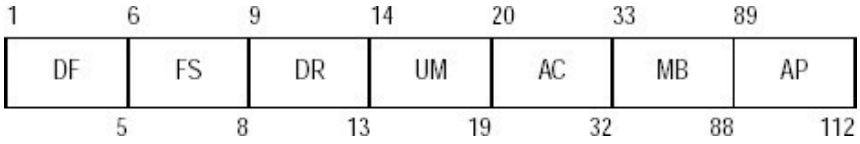

This reply shall be generated in response to an interrogation UF 4 or 20 with an RR field value greater than 15. The format of this reply shall consist of these fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| FS flight status | 3.1.2.6.5.1 |
| DR downlink request | 3.1.2.6.5.2 |
| UM utility message | 3.1.2.6.5.3 |
| AC altitude code | 3.1.2.6.5.4 |
| MB message, Comm-B | 3.1.2.6.6.1 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.6.6.1 MB: Message, Comm-B.** This 56-bit (33-88) downlink field shall be used to transmit data link messages to the ground.

### 3.1.2.6.7 SURVEILLANCE IDENTITY REPLY, DOWNLINK FORMAT5

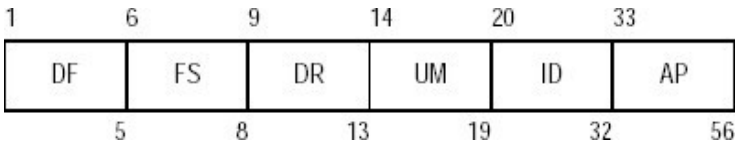


This reply shall be generated in response to an interrogation UF 5 or 21 with an RR field value less than 16. The format of this reply shall consist of these fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| FS flight status | 3.1.2.6.5.1 |
| DR downlink request | 3.1.2.6.5.2 |
| UM utility message | 3.1.2.6.5.3 |
| ID identity | 3.1.2.6.7.1 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.6.7.1 ID: Identity (Mode A code).** This 13-bit (20-32) field shall contain aircraft identity code, in accordance with the pattern for Mode A replies in 3.1.1.6. Starting with bit 20, the sequence shall be C1, A1, C2, A2, C4, A4, ZERO, B1, D1, B2, D2, B4, D4.

### 3.1.2.6.8 COMM-B IDENTITY REPLY, DOWNLINK FORMAT21

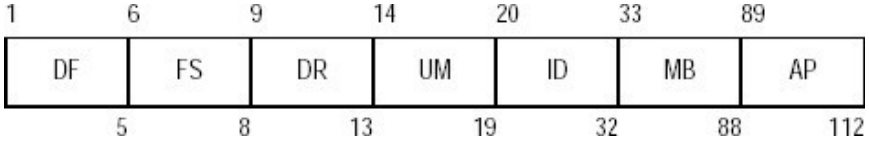


This reply shall be generated in response to an interrogation UF 5 or 21 with an RR field value greater than 15. The format of this reply shall consist of these fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| FS flight status | 3.1.2.6.5.1 |
| DR downlink request | 3.1.2.6.5.2 |
| UM utility message | 3.1.2.6.5.3 |
| ID identity | 3.1.2.6.7.1 |
| MB message, Comm-B | 3.1.2.6.6.1 |
| AP address/parity | 3.1.2.3.2.1.3 |

### 3.1.2.6.9 LOCKOUTPROTOCOLS

*Note.— Non-selective all-call lockout and multisite lockout are not mutually exclusive. Interrogators using multisite lockout protocols for interrogator networking coordination may use non- selective lockout commands in the same interrogation. For example, the non-selective lockout may be used to prevent Mode S transponder replies with DF=11 to wrongly detected Mode A/C/S all-call interrogations from Mode A/C-only all-call interrogations. This is because of the misinterpretation of the narrow P4 pulse as a wide P4 pulse.*

#### 3.1.2.6.9.1 Multisite all-call lockout

**The multisite lockout command shall be transmitted in the SD field (3.1.2.6.1.4.1).**A lockout command for an II code shall be transmitted in an SD with DI=1 or DI=7. An II lockout command shall be indicated by LOS code equals 1 and the presence of a non-zero interrogator identifier in the IIS subfield of SD. A lockout command for an SI code shall be transmitted in an SD with DI = 3. SI lockout shall be indicated by LSS equals 1 and the presence of a non-zero interrogator identifier in the SIS subfield of SD. After a transponder has accepted an interrogation containing a multisite lockout command, that transponder shall commence to lock out (i.e. not accept) any Mode S- only all-call interrogation which includes the identifier of the interrogator that commanded the lockout. The lockout shall persist for an interval TL (3.1.2.10.3.9) after the last acceptance of an interrogation containing the multisite lockout command. Multisite lockout shall not prevent acceptance of a Mode S-only all-call interrogation containing PR codes 8 to 12. If a lockout command (LOS = 1) is received together with IIS = 0, it shall be interpreted as a non-selective all - call lockout (3.1.2.6.9.2).

*Note 1.— Fifteen interrogators can send independent multisite II lockout commands. In addition, 63 interrogators*

*can send independent SI lockout commands. Each of these lockout commands must be timed separately.*

*Note 2.— Multisite lockout (which only uses non-zero II codes) does not affect the response of the transponder to Mode S-only all-call interrogations containing II equals 0.*

**3.1.2.6.9.2 Non-selective all-call lockout**

On acceptance of an interrogation containing code 1 in the PC field, a transponder shall commence to lock out (i.e. not accept) the Mode S-only all-call (UF = 11), with II equals 0.

This lockout condition shall persist for an interval TD (3.1.2.10.3.9) after the last receipt of the command. Non-selective lockout shall not prevent acceptance of a Mode S-only all-call interrogation containing PR codes 8 to 12.

*Note — Non-selective lockout does not affect the response of the transponder to Mode S-only all-call interrogations containing II not equal to 0.*

**3.1.2.6.10 BASIC DATA PROTOCOLS**

**3.1.2.6.10.1 Flight status protocol**. Flight status shall be reported in the FS field (3.1.2.6.5.1).

**3.1.2.6.10.1.1 Alert**. An alert condition shall be reported in the FS field if the Mode A identity code transmitted in Mode A replies and in downlink formats DF equals 5 and DF equals 21 are changed by the pilot.

**3.1.2.6.10.1.1.1 Permanent alert condition**. The alert condition shall be maintained if the Mode A identity code is changed to any of the codes contained in one of the two Mode A code sets defined as follows:

a) Mode A code set 1 for special purposes shall contain Mode A code 7500, 7600 or 7700.

b) Mode A code set 2 for special purposes shall contain Mode A code 7400, 7500, 7600 or 7700.

**3.1.2.6.10.1.1.2 Temporary alert condition.** The alert condition shall be temporary and shall cancel itself after $T_C$ seconds if the Mode A identity code is changed to a value other than those listed in 3.1.2.6.10.1.1.1. The $T_C$ shall be retriggered and continued for $T_C$ seconds after any change has been accepted by the transponder function.

*Note 1.— This retriggering is performed to ensure that the ground interrogator obtains the desired Mode A identity code before the alert condition is cleared.*

*Note 2.— The value of $T_C$ is given in 3.1.2.10.3.9.*

**3.1.2.6.10.1.1.3 Termination of the permanent alert condition.** The permanent alert condition shall be terminated and replaced by a temporary alert condition when the Mode A identity code is set to a value other than those defined in Mode A code set 1 or set 2 listed in 3.1.2.6.10.1.1.1, a) and b).

**3.1.2.6.10.1.2** **Special position identification (SPI**). An equivalent of the SPI pulse shall be transmitted by Mode S transponders in the FS field and the surveillance status subfield (SSS) when manually activated. This pulse shall be transmitted for TI seconds after initiation (3.1.1.6.3, 3.1.1.7.13 and3.1.2.8.6.3.1.1).

**3.1.2.6.10.2 Capability reporting protocol**

**3.1.2.6.10.2.1** **Capability report.** The 3-bit CA field, contained in the all-call reply, DF equals 11, shall report the basic capability of the Mode S transponder as described in 3.1.2.5.2.2.1.

**3.1.2.6.10.2.2** **Data link capability report**. The data link capability report shall provide the interrogator with a description of the data link capability of the Mode-S installation.

**3.1.2.6.10.2.2.1 Extraction and subfields in MB for data link capability report**

**3.1.2.6.10.2.2.1.1** Extraction of the data link capability report contained in register $10_{16}$ The report shall be obtained by a ground-initiated Comm-B reply in response to an interrogation containing RR equals 17 and DI is not equal to 7 or DI equals 7 and RRS equals 0 (3.1.2.6.11.2).

**3.1.2.6.10.2.2.1.2** Sources of data link capability. Data link capability reports shall contain the capabilities provided by the transponder, and the ACAS unit.

**3.1.2.6.10.2.2.1.3** The data link capability report shall contain information on the following capabilities as specified in Table 3-6.

**3.1.2.6.10.2.2.1.4** The Mode S subnetwork version number shall contain information to ensure interoperability with older airborne equipment.

**3.1.2.6.10.2.2.1.4.1** The Mode S subnetwork version number shall indicate that all implemented subnetwork functions are in compliance with the requirements of the indicated version number. The Mode S subnetwork version number shall be set to a non-zero value if at least one DTE or Mode S specific service is installed.

**3.1.2.6.10.2.2.2** Updating of the data link capability report. The transponder shall, at intervals not exceeding four seconds, compare the current datalink capability status with that last reported and shall, if a difference is noted, initiate a revised data link capability report by Comm-B broadcast (3.1.2.6.11.4) for BDS1 = 1 (33-36) and BDS 2 = 0 (37-40). The transponder shall initiate, generate and announce the revised capability report even if the aircraft data link capability is degraded or lost. The transponder shall ensure that the BDS code for thedata link capability report in all cases, including loss of the interface.

*Note.— The setting of the BDS code by the transponder ensures that a broadcast change of capability report will contain the BDS code for all cases of data link failure (e.g. the loss of the transponder data link interface).*

**3.1.2.6.10.2.2.3 Zeroing of bits in the data link capability report**

If a particular data field within the data link capability report (transponder register $10_{16}$) cannot be updated within 8 seconds, the data field shall be set to ZERO.

Note.1 -- See Doc 9871 for further details.

Note 2.--Transponders maintaining aircraft identification upon the loss of the interface providing aircraft identification do not reset to zero bit 33 (2.1.5.4.7 and 2.1.5.4.8)

**3.1.2.6.10.2.3** **Common usage GICB capability report**. Common usage GICB services which are being actively updated shall be indicated in transponder register 1716.

**3.1.2.6.10.2.4** **Mode S specific services GICB capability reports**. GICB services that are installed shall be reported in registers 1816 to 1C16.

**3.1.2.6.10.2.5** **Mode S specific services MSP capability reports**. MSP services that are installed shall be reported in registers 1D16 to 1F16.

**3.1.2.6.10.3 Basic dataflash protocol**

**3.1.2.6.10.3.1** Basic dataflash capability report. Transponders which monitor at least one of the registers subject to basic dataflash protocol and report their changes through the basic dataflash protocol, shall report this capability in the data link capability report (3.1.2.6.10.2.2.2) by setting bit 42 and bit 9 of the MB subfield to 1.

Note 1.— The registers for which changes can be reported using the basic dataflash protocol are defined in Doc 9871.

Note 2.— The setting of bit 9 to 1 indicates that the content of register 1016 continues in register 1116. This is what is expected when the basic dataflash option is implemented even if the basic dataflash state bits report zero because no information is provided to the monitored registers.

**3.1.2.6.10.3.2** Mode S subnetwork version. Transponders which monitor register changes and report their changes through the basic dataflash protocol shall support a Mode S subnetwork Version 6 or above.

Note.— The basic dataflash protocol uses register formats that have been defined with Mode S Subnetwork Version 6. More information can be found in Doc 9871.

**3.1.2.6.10.3.3** Each basic dataflash register that is implemented shall have its contents updated at an

interval not to exceed its update interval.

Note.— The register update intervals are defined in Doc 9871.

**3.1.2.6.10.3.4 Register basic dataflash state**

**3.1.2.6.10.3.4.1** The basic dataflash state for each of the registers defined in register 1116 shall contain its associated monitoring states as follows:
Coding
0: Register not monitored or not implemented
1: Register monitored and implemented but no change yet detected
2: Register monitored and change 1 detected
3: Register monitored and change 2 detected

**3.1.2.6.10.3.4.2** Each register shall be monitored for a change according to its update period.

Note.— The register update periods are defined in Doc 9871.

**3.1.2.6.10.3.4.3** Upon first entry into the monitored state, the transponder shall set the monitoring bits allocated in register 1116 for that basic dataflash register to “1”, meaning register monitored and implemented but no change yet detected.

**3.1.2.6.10.3.4.4** Once a change has been detected, the basic dataflash state of the corresponding register shall be toggled between 2 and 3 with each change.

Note.— Toggle means if the register basic dataflash state was 2, at the next change it becomes 3 and if it was 3, it becomes 2.

**3.1.2.6.10.3.5** Monitoring change and announcing a change to ground state

**3.1.2.6.10.3.5.1** At intervals not exceeding 1 second, the transponder shall determine if the contents of register 1116 have changed since the last update.

**3.1.2.6.10.3.5.2** If the contents of register 1116 have changed, bit 51 of register 1016 shall be toggled and the F-timer shall be started (see Table 3-9).

Note.— The toggling (1→ 0 or 0→1) of bit 51 in register 1016 will trigger a Comm-B broadcast of register 1016.

**3.1.2.6.10.3.5.3** All basic dataflash monitoring activity (comparison of register contents and setting of bits in register 1116) shall be suspended until the F-timer expires.

Note 1.— The suspension of basic dataflash monitoring avoids the Comm-B broadcast channel saturation.

Note 2.— Dataflash monitoring suspension means that the current content of monitored registers are retained and the detection of a change with the new contents of these registers will re-start after the 30s timer. The monitored registers themselves continue to be updated at their update periodicity.

Note 3.— The use of basic dataflash protocol by ground systems is described in Doc 9924. This allows reduction of periodic GICB extraction of registers.

### 3.1.2.6.11 STANDARD LENGTH COMMUNICATIONSPROTOCOLS

**Table 3-6. Table for the data link capability report (register $10_{16}$ )**

| *Subfields of register $10_{16}$* | *MB bits* | *Comm-B bits* |
|---|---|---|
| Continuation flag | 9 | 41 |
| Operational coordination message (OCM) transmit capability | 10 | 42 |
| Overlay command capability | 15 | 47 |
| ACAS capability | 11-14,16 and 37-40 | 43-46, 48 and 69-72 |
| Mode S sub network version number | 17-23 | 49-55 |
| Transponder enhanced protocol indicator | 24 | 56 |
| Specific services capability | 25 | 57 |
| Uplink ELM capability | 26-28 | 58-60 |
| Downlink ELM capability | 29-32 | 61-64 |
| Aircraft identification capability | 33 | 65 |
| Squitter capability subfield (SCS) | 34 | 66 |
| Surveillance identifier code capability 9SIC) | 35 | 67 |
| Common usage GICB capability report | 36 | 68 |
| Basic dataflash capability | 42 | 74 |
| Phase overlay (PO) on extended squitter capability | 43 | 75 |
| Phase overlay (PO) on Mode S capability | 44 | 76 |
| Active transponder side indicator | 49–50 | 81–82 |
| Register 1116 data link capability (continuation) change indicator | 51 | 83 |
| | | |

Note.— The “Status of DTE sub address 0 to 15” subfield that was previously defined as MB bits 41–56 in the data link capability report (register 1016) is now defined as MB bits 41–56 in the data link capability report (extension ) (register 1116). Additional information on all bits in the data link capability report can be found in Doc 9871.

**3.1.2.6.11.1 Comm-A.** The interrogator shall deliver a Comm-A message in the MA field of an interrogation UF = 20 or 21.

**3.1.2.6.11.1.1 Comm-A technical acknowledgement.** Acceptance of a Comm-A interrogation shall be automatically technically acknowledged by the transponder, by the transmission of the requested reply (3.1.2.10.5.2.2.1).

**3.1.2.6.11.1.2 Comm-A broadcast**. If a Comm-A broadcast interrogation is accepted (3.1.2.4.1.2.3.1.3) information transfer shall be handled according to 3.1.2.10.5.2.1.1 but other transponder functions shall not be affected and a reply shall not be transmitted.

**3.1.2.6.11.2 Ground-initiated Comm-B**

**3.1.2.6.11.2.1** **Comm-B data selector**, BDS. The 8-bit BDS code shall determine the register whose contents shall be transferred in the MB field of the Comm-B reply. It shall be expressed in two groups of 4 bits each, BDS1 (most significant 4 bits) and BDS2 (least significant 4bits).

*Note.— The transponder register allocation is specified in Doc 9871*

**3.1.2.6.11.2.2** **BDS1code**.The BDS1 code shall be as defined in the RR field of a surveillance or Comm-A interrogation.

**3.1.2.6.11.2.3** **BDS2 code**. The BDS2 code shall be as defined in the RRS subfield of the SD field (3.1.2.6.1.4.1) when DI = 7 or DI=3. If no BDS2 code is specified (i.e. DI is not equal to either 7 or 3) it shall signify that BDS2 =0.

**3.1.2.6.11.2.4** **Protocol.** On receipt of such a request, the MB field of the reply shall contain the contents of the requested ground-initiated Comm-B register.

**3.1.2.6.11.2.4.1** If the requested register is not serviced by the aircraft installation, the transponder shall reply and the MB field of the reply shall contain all ZEROs.

**3.1.2.6.11.2.5** Overlay control. If the “DI” code of the Comm-B requesting interrogation is 0, 3, or 7, the “SD” contains the overlay control (OVC) field in accordance with paragraph3.1.2.6.1.4.1.i.

a) If the “OVC” is equal to “1,” then the reply to the interrogation shall contain the “DP” (data parity) field in accordance with paragraph 3.1.2.3.2.1.5; and
b) If the “OVC” is equal to “0,” then the reply to the interrogation shall contain the “AP” field in accordance with paragraph 3.1.2.3.2.1.3.

**3.1.2.6.11.2.6** **Phase overlay ground-initiated Comm-B**. For equipment that support phase overlay on Mode S replies, when the reply contains the contents of the requested ground-initiated Comm-B register, phase data shall be encoded data in accordance with the register requested in the interrogation (that is, requested BDS code) and as defined for that register.

**3.1.2.6.11.2.6.1** PO message type field. The phase overlay message type field in PD data bits 1–8 shall be set to 2 for phase overlay Mode S GICB data with Reed-Solomon FEC and to 8 to indicate phase overlay Mode S GICB data with LDPC FEC.

**3.1.2.6.11.2.6.2** PO message subtype field. PD data bits 9–12 shall contain the phase overlay message subtype field and is set to 1. The subfield is defined as shown in Table 3-14.

Note.— Future UF codes may contain commands to force the transmission of other data in the phase overlay data block overlaid on Mode S long replies.

**3.1.2.6.11.2.6.3** PO-BDS field. PD data bits 13–20 shall contain the BDS register number requested

as per 3.1.2.6.11.2.1.

**3.1.2.6.11.2.6.4** PO data-block field. PD data bits 21–204 shall contain the content of the corresponding phase overlay data associated with the requested BDS register. When there is no phase overlay data defined for the requested BDS register, all bits shall be set to ZERO except the PO message type field is set to 2 or 8, PO message subtype = 1, PO-BDS = BDS number of requested BDS register, and the 24-bit address is contained in the aircraft address (PD bits 181 through 204).

### 3.1.2.6.11.3 Air-initiated Comm-B

**3.1.2.6.11.3.1** **General protocol**. The transponder shall announce the presence of an air-initiated Comm-B message with the insertion of code 1 in the DR field. To extract an air-initiated Comm-B message, the interrogator shall transmit a request for a Comm-B message reply in a subsequent interrogation with RR equal to 16 and, if DI equals 7, RRS must be equal to 0 (3.1.2.6.11.3.2.1 and 3.1.2.6.11.3.3.1). Receipt of this request code shall cause the transponder to transmit the air- initiated Comm-B message. If a command to transmit an air-initiated Comm-B message is received while no message is waiting to be transmitted, the reply shall contain all ZEROs in the MB field. For equipment that support phase overlay on Mode S replies, when an air-initiated Comm-B message is transmitted, PD data bits 1–204 shall be set to ZERO.

The reply that delivers the message shall continue to contain code 1 in the DR field. After a Comm-B closeout has been accomplished, the message shall be cancelled and the DR code belonging to this message immediately removed. If another air-initiated Comm-B message is waiting to be transmitted, the transponder shall set the DR code to 1, so that the reply contains the announcement of this next message.

Note.— The announcement and cancellation protocol ensures that an air-initiated message will not be lost due to uplink or downlink failures that occur during the delivery process.

An interrogator that has either not been assigned an IC or cannot ensure that its interrogation region will not overlap with the interrogation region of another interrogator using the same IC, shall not attempt to extract an air-initiated Comm-B message announced by DR equals 1 or 3.

**3.1.2.6.11.3.1.1** Phase overlay data. When an air-initiated Comm-B message is transmitted, for equipment supporting phase overlay on Mode S replies, PD data bits 1–204 shall be set to ZERO.

**3.1.2.6.11.3.2** **Additional protocol for multisite air-initiated Comm-B**

An interrogator should not attempt to extract a message if it has determined that it is not the reserved site.

**3.1.2.6.11.3.2.1** **Message transfer**. An interrogator shall request a Comm-B reservation and extract an air-initiated Comm-B message by transmitting a surveillance or Comm-A interrogation UF equals 4, 5, 20 or 21 containing:

RR = 16
DI = 1
IIS = assigned interrogator identifier
MBS = 1 (Comm-B reservation request)

**3.1.2.6.11.3.2.1.1** Protocol procedure in response to this interrogation shall depend upon the state of the B-timer which indicates if a Comm-B reservation is active. This timer shall run for TR seconds.

a) If the B-timer is not running, the transponder shall grant a reservation to the requesting interrogator by:

1) storing the IIS of the interrogation as the Comm-B II; and

2) starting the B-timer.

A multisite Comm-B reservation shall not be granted by the transponder unless an air-initiated Comm-B message is waiting to be transmitted and the requesting interrogation contains RR equals 16, DI equals 1, MBS equals 1 and IIS is not 0.

b) If the B-timer is running and the IIS of the interrogation equals the Comm-B II, the transponder shall restart the B-timer.

c) If the B-timer is running and the IIS of the interrogation does not equal the Comm-B II, then there shall be no change to the Comm-B II or the B-timer.

**3.1.2.6.11.3.2.1.2** In each case the transponder shall reply with the Comm-B message in the MB field.

**3.1.2.6.11.3.2.1.3** An interrogator shall determine if it is the reserved site for this message through coding in the UM field. If it is the reserved site it shall attempt to close out the message in a subsequent interrogation. If it is not the reserved site it shall not attempt to close out the message.

**3.1.2.6.11.3.2.2** **Multisite-directed Comm-B transmissions**. To direct an air-initiated Comm-B message to a specific interrogator, the multisite Comm-B protocol shall be used. When the B-timer is not running, the interrogator identifier of the desired destination shall be stored as the Comm-B II. Simultaneously the B-timer shall be started and the DR code shall be set to 1. For a multisite- directed Comm-B message, the B-timer shall not automatically time out but shall continue to run until:

a) the message is read and closed out by the reserved site; or

b) the message is cancelled (3.1.2.10.5.4) by the data link avionics.

**3.1.2.6.11.3.2.3** **Multisite Comm-B closeout**. The interrogator shall close out a multisite air-

initiated Comm-B by transmitting either a surveillance or a Comm-A interrogation containing:

either DI = 1
IIS = assigned interrogator identifier
MBS = 2 (Comm-B closeout)
or DI = 0, 1 or 7
IIS = assigned interrogator identifier
PC = 4 (Comm-B closeout)

The transponder shall compare the IIS of the interrogation to the Comm-B II and if the interrogator identifiers do not match, the message shall not be cleared and the status of the Comm-B II, B-timer, and DR code shall not be changed. If the interrogator identifiers match, the transponder shall set the Comm-B II to 0, reset the B-timer, clear the DR code for this message and clear the message itself. The transponder shall not close out a multisite air- initiated Comm-B message unless it has been read out at least once by the reserved site.

**3.1.2.6.11.3.2.4 Automatic expiration of Comm-B reservation**. If the B-timer period expires before a multisite closeout has been accomplished, the Comm-B II shall be set to 0 and the B-timer reset. The Comm-B message and the DR field shall not be cleared by the transponder.

**3.1.2.6.11.3.3 Additional protocol for non-selective air-initiated Comm-B**

**3.1.2.6.11.3.3.1 Message transfer**. The interrogator shall extract the message by transmitting either RR equals 16 and DI is not equal to 7, or RR equals 16, DI equals 7 and RRS equals 0 in a surveillance or Comm-A interrogation.

**3.1.2.6.11.3.3.2 Comm-B closeout.** The interrogator shall close out a non-selective air- initiated Comm-B message by transmitting PC equals 4 (Comm-B closeout). On receipt of this command, the transponder shall perform closeout, unless the B-timer is running. If the B-timer is running, indicating that a multisite reservation is in effect, closeout shall be accomplished as per 3.1.2.6.11.3.2.3. The transponder shall not close out a non-selective air- initiated Comm-B message unless it has been read out at least once by an interrogation using non-selective protocols.

**3.1.2.6.11.3.4.1** Enhanced air-initiated Comm-B protocol The transponder shall be capable of storing two or more messages for each of the sixteen II codes: (1) an air-initiated or multisite-directed Comm-B message and (2) the contents of GICB registers 2 through 4.

**3.1.2.6.11.3.4.2 Enhanced multisite air-initiated Comm-B protocol**

**3.1.2.6.11.3.4.2.1** Initiation. An air-initiated Comm-B message input into the transponder shall be stored in the registers assigned to II =0.

**3.1.2.6.11.3.4.2.2 Announcement and extraction**. A waiting air-initiated Comm-B message shall be announced in the DR field of the replies to all interrogators for which

a multisite directed Comm-B message is not waiting. The UM field of the announcement reply shall indicate that the message is not reserved for any II code, i.e., the IIS subfield shall be set to 0. When a command to read this message is received from a given interrogator, the reply containing the message shall contain an IIS subfield content indicating that the message is reserved for the II code contained in the interrogation from that interrogator. After readout and until closeout, the message shall continue to be assigned to that II code. Once a message is assigned to a specific II code, announcement of this message shall be no longer made in the replies to interrogators with other II codes. If the message is not closed out by the assigned interrogator for the period of the B-timer, the message shall revert back to multisite air-initiated status and the process shall repeat. Only one multisite air-initiated Comm-B message shall be in process at a time.

**3.1.2.6.11.3.4.2.3** **Closeout**. A closeout for a multisite air-initiated message shall only be accepted from the interrogator that is currently assigned to transfer the message.

**3.1.2.6.11.3.4.2.4** **Announcement of the next message waiting**. The DR field shall indicate a message waiting in the reply to an interrogation containing a Comm-B closeout if an unassigned air-initiated message is waiting and has not been assigned to a II code, or if a multisite-directed message is waiting for that II code (3.1.2.6.11.3.4.3).

**3.1.2.6.11.3.4.3** **Enhanced multisite directed Comm-B protocol**

**3.1.2.6.11.3.4.3.1** **Initiation.** When a multisite directed message is input into the transponder, it shall be placed in the Comm-B registers assigned to the II code specified for the message. If the registers for this II code are already occupied, (i.e. a multisite directed message is already in process to this II code) the new message shall be queued until the current transaction with that II code is closed out

**3.1.2.6.11.3.4.3.2** **Announcement.** Announcement of a Comm-B message waiting transfer shall be made using the DR field as specified in 3.1.2.6.5.2 with the destination interrogator II code contained in the IIS subfield as specified in 3.1.2.6.5.3.2. The DR field and IIS subfield contents shall be set specifically for the interrogator that is to receive the reply. A waiting multisite directed message shall only be announced in the replies to the intended interrogator. It shall not be announced in the replies to other interrogators.

**3.1.2.6.11.3.4.3.3** **Closeout**. Closeout shall be accomplished as specified in 3.1.2.6.11.3.2.3.

**3.1.2.6.11.3.4.3.4** **Announcement of the next message waiting.** The DR field shall indicate a message waiting in the reply to an interrogation containing a Comm-B closeout if another multisite directed message is waiting for that II code, or if an air-initiated message is waiting and has not been assigned to a II code. (See 3.1.2.6.11.3.4.2.4)

**3.1.2.6.11.3.4.4** **Enhanced non-selective Comm-B protocol**. The availability of a non-

selective Comm-B message shall be announced to all interrogators. Otherwise, the protocol shall be as specified in 3.1.2.6.11.3.3.

**3.1.2.6.11.4 Comm-B broadcast**

**3.1.2.6.11.4.1 Initiation.**

**3.1.2.6.11.4.1.1** A Comm-B broadcast cycle shall begin with:

a) loading of the broadcast message into the Comm-B buffer;

b) the starting of the B-timer- for the current Comm-B message; and

*Note.— If there is more than one Comm-B message waiting for transmission, the timer is only started once the message becomes the current Comm-B broadcast.*

c) the selection of DR code 4 or 5, (3.1.2.6.5.2) for insertion into future replies with DF 4, 5, 20 or 21 when ACAS information is not available, or DR code 6 or 7 when ACAS information is available.

**3.1.2.6.11.4.1.2** The DR field shall be changed to the next value each time a new Comm-B broadcast message is initiated by the transponder.

*Note.— The change of the DR value is used by the interrogator to detect that a new Comm-B broadcast message is announced and to extract the new Comm-B message.*

**3.1.2.6.11.4.1.3** A Comm-B broadcast cycle shall not be initiated when an air-initiated Comm-B message is waiting to be transmitted.

**3.1.2.6.11.4.1.4** A new Comm-B broadcast cycle shall not interrupt a current Comm-B broadcast cycle.

**3.1.2.6.11.4.2 Extraction.**

**3.1.2.6.11.4.2.1** . To extract the broadcast message, an interrogator shall transmit RR equals 16 and DI not equal to 3 or 7 or RR equals 16 and DI equals 3 or 7 with RRS equals 0 in a subsequent interrogation.

**3.1.2.6.11.4.2.2** . For equipment that support phase overlay on Mode S replies, PD message bits 1 through 204 shall contain the data as specified in 3.1.2.6.11.2.6 for the register that is broadcast or all ZEROs for other broadcast channels.

**3.1.2.6.11.4.3 Expiration.** When the B-timer period expires, the transponder shall clear the DR code for this message, discard the present broadcast message and change the broadcast message number (from 1 to 2 or 2 to 1) in preparation for a subsequent Comm-B broadcast.

**3.1.2.6.11.4.4 Interruption.** In order to prevent a Comm-B broadcast cycle from delaying the delivery of an air-initiated Comm-B message, provision shall be made for an air-initiated Comm-B to interrupt a Comm-B broadcast cycle. If a broadcast cycle is interrupted, the B-timer shall be reset, the interrupted broadcast

message shall be retained and the message number shall not be changed. Delivery of the interrupted broadcast message shall recommence when no air-initiated Comm-B transaction is in effect. The message shall then be broadcast for the full duration of the B-timer.

**3.1.2.6.11.4.5** **Enhanced broadcast Comm-B protocol**. A broadcast Comm-B message shall be announced to all interrogators using II codes. The message shall remain active for the period of the B-timer for each II code. The provision for interruption of a broadcast by non-broadcast Comm-B as specified in 3.1.2.6.11.4.4shall apply separately to each II code. When the B-timer period has been achieved for all II codes, the broadcast message shall be automatically cleared as specified in 3.1.2.6.11.4.3. A new broadcast message shall not be initiated until the current broadcast has been cleared.

**3.1.2.6.11.5** Management *of Comm-B messages waiting for transmission.* If the content of a waiting Comm-B broadcast message is updated, only the most recent value for each downlink broadcast identifier shall be retained and broadcast once the current Comm-B broadcast is finished.

*Note.— Downlink broadcast identifiers are defined in the* Manual on Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871).*

## 3.1.2.7 EXTENDED LENGTH COMMUNICATION TRANSACTIONS

### 3.1.2.7.1 COMM-C, UPLINK FORMAT24

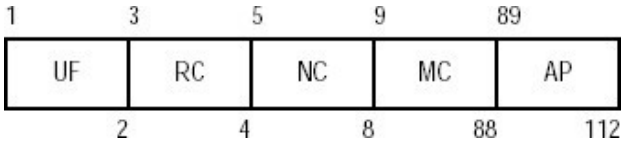


The format of this interrogation shall consist of these fields:

| Field | Reference |
|---|---|
| UP uplink format | 3.1.2.3.2.1.1 |
| RC reply control | 3.1.2.7.1.1 |
| NC number of C-segment | 3.1.2.7.1.2 |
| MC message, Comm-C | 3.1.2.7.1.3 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.7.1.1** **RC: Reply control.** This 2-bit (3-4) uplink field shall designate segment significance and reply decision.

**Coding**

RC = 0 signifies uplink ELM initial segment in MC
= 1 signifies uplink ELM intermediate segment in MC
= 2 signifies uplink ELM final segment in MC

= 3 signifies a request for downlink ELM delivery (3.1.2.7.7.2)

**3.1.2.7.1.2** **NC: Number of C-segment**. This 4-bit (5-8) uplink field shall designate the number of the message segment contained in MC (3.1.2.7.4.2.1). NC shall be coded as a binary number.

**3.1.2.7.1.3** **MC: Message, Comm-C.** This 80-bit (9-88) uplink field shall contain:

a) one of the segments of a sequence used to transmit an uplink ELM to the transponder containing the 4-bit (9-12) IIS subfield; or

b) control codes for a downlink ELM, the 16-bit (9-24) SRS subfield (3.1.2.7.7.2.1) and the 4-bit (25-28) IIS subfield.

**3.1.2.7.2 Interrogation Reply Protocol for UF24**

**3.1.2.7.3 COMM-D, DOWNLINK FORMAT24**




The format of this reply shall consist of these fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| spare - 1 bit | |
| KE control, ELM | 3.1.2.7.3.1 |
| ND number of D-segment | 3.1.2.7.3.2 |
| MD message, Comm-D | 3.1.2.7.3.3 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.7.3.1** **KE: Control, ELM**. This 1-bit (4) downlink field shall define the content of the ND and MD fields.

**Coding**

KE = 0 signifies downlink ELM transmission
= 1 signifies uplink ELM acknowledgement

**3.1.2.7.3.2** **ND: Number of D-segment**. This 4-bit (5-8) downlink field shall designate the number of the message segment contained in MD (3.1.2.7.7.2). ND shall be coded as a binary number.

a) **MD: Message, Comm-D**. This 80-bit (9-88) downlink field shall contain: one of the segments of a sequence used to transmit a downlink ELM to the interrogator; or

b) control codes for an uplink ELM.

### 3.1.2.7.4 MULTISITE UPLINK ELMPROTOCOL

**3.1.2.7.4.1 Multisite uplink ELM reservation**. An interrogator shall request a reservation for an uplink ELM by transmitting a surveillance or Comm-A interrogation containing:

DI = 1
IIS = assigned interrogator identifier
MES = 1 or 5 (uplink ELM reservation request)

**3.1.2.7.4.1.1** Protocol procedure in response to this interrogation shall depend upon the state of the C-timer which indicates if an uplink ELM reservation is active. This timer shall run for TR seconds.

a) If the C-timer is not running the transponder shall grant a reservation to the requesting interrogator by:

1) storing the IIS of the interrogation as the Comm-C II and,
2) starting the C-timer.

b) If the C-timer is running and the IIS of the interrogation equals the Comm-C II, the transponder shall restart the C-timer.

c) If the C-timer is running and the IIS of the interrogation does not equal the Comm-C II, there shall be no change to the Comm-C II or the C-timer.

**3.1.2.7.4.1.2** An interrogator shall not start ELM activity unless, during the same scan, having requested an uplink ELM status report, it has received its own interrogator identifier as the reserved interrogator for uplink ELM in the UM field.

**3.1.2.7.4.1.3** If uplink ELM delivery is not completed on the current scan, the interrogator shall ensure that it still has a reservation before delivering additional segments on a subsequent scan.

3.1.2.7.4.2 **Multisite uplink ELM delivery**. The minimum length of an uplink ELM shall be 2 segments, the maximum length shall be 16 segments.

**3.1.2.7.4.2.1 Initial segment transfer.** The interrogator shall begin the ELM uplink delivery for an n-segment message (NC values from 0 to n-1) by a Comm-C transmission containing RC equals 0. The message segment transmitted in the MC field shall be the last segment of the message and shall carry NC equalsn-1.On receipt of an initializing segment (RC = 0) the transponder shall establish a “setup” defined as:

a) clearing the number and content of previous segment storage registers and the associated TAS field;

b) assigning storage space for the number of segments announced in NC of this interrogation; and

c) storing the MC field of the segment received.

The transponder shall not reply to this interrogation.

Receipt of another initializing segment shall result in a new setup within the transponder.

**3.1.2.7.4.2.2 Transmission acknowledgement**. The transponder shall use the TAS subfield to report the segments received so far in an uplink ELM sequence. The information contained in the TAS subfield shall be continually updated by the transponder as segments are received.

**3.1.2.7.4.2.2.1 TAS, transmission acknowledgement subfield in MD.** This 16-bit (17-32) downlink subfield in MD reports the segment numbers received so far in an uplink ELM sequence. Starting with bit 17, which denotes segment number 0, each of the following bits shall be set to ONE if the corresponding segment of the sequence has been received. TAS shall appear in MD if KE equals 1 in the same reply.

**3.1.2.7.4.2.3 Intermediate segment transfer.** The interrogator shall transfer intermediate segments by transmitting Comm-C interrogations with RC equals 1. The transponder shall store the segments and update TAS only if the setup of 3.1.2.7.4.2.1 is in effect and if the received NC is smaller than the value stored at receipt of the initial segment. No reply shall be generated on receipt of an intermediate segment.

**3.1.2.7.4.2.4 Final segment transfer.** The interrogator shall transfer a final segment by transmitting a Comm-C interrogation with RC equals 2. This interrogation may contain any message segment. The transponder shall store the content of the MCfieldandupdateTASifthesetupof3.1.2.7.4.2.1isineffectandifthereceived NC is smaller than the value of the initial segment NC. The transponder shall reply under all circumstances as per3.1.2.7.4.2.5.

**3.1.2.7.4.2.5 Acknowledgement reply**. On receipt of a final segment, the transponder shall transmit a Comm-D reply (DF = 24), with KE equals 1 and with the TAS subfield in the MD field. This reply shall be transmitted at 128 microseconds plus or minus 0.25 microseconds following the sync phase reversal of the interrogation delivering the final segment.

**3.1.2.7.4.2.6 Completed message**. The transponder shall deem the message complete if all segments announced by NC in the initializing segment have been received. If the message is complete, the message content shall be delivered to the outside via the ELM interface of 3.1.2.10.5.2.1.3 and cleared. No later-arriving segments shall be stored. The TAS content shall remain unchanged until either a new setup is called for (3.1.2.7.4.2.1) or until close out(3.1.2.7.4.2.8).

**3.1.2.7.4.2.7 C-timer restart**. The C-timer shall be restarted each time that a received segment is stored and the Comm-C II is not0.

**3.1.2.7.4.2.8 Multisite uplink ELM closeout**. The interrogator shall close out a multisite uplink

ELM by transmitting either a surveillance or a Comm-A interrogation containing:

either DI = 1
ILS = assigned interrogator identifier
MES = 2, 6 or 7 (uplink ELM closeout)

or DI = 0, 1 or7
IIS = assigned interrogator identifier
PC = 5 (uplink ELM closeout)

The transponder shall compare the IIS of the interrogation to the Comm-C II and if the interrogator identifiers do not match, the state of the ELM uplink process shall not be changed.

If the interrogator identifiers match, the transponder shall set the Comm-C II to 0, reset the C-timer, clear the stored TAS and discard any stored segments of an incomplete message.

**3.1.2.7.4.2.9 Automatic multisite uplink ELM closeout**. If the C-timer period expires before a multisite closeout has been accomplished the closeout actions described in 3.1.2.7.4.2.8 shall be initiated automatically by thetransponder.

### 3.1.2.7.5 NON-SELECTIVE UPLINKELM

Non-selective uplink ELM delivery shall take place as for multisite uplink ELMs described in 3.1.2.7.4.2. The interrogator shall close out an uplink ELM by transmitting PC equals 5 (uplink ELM closeout) in a surveillance or Comm-A interrogation. On receipt of this command, the transponder shall perform closeout, unless the C-timer is running. If the C-timer is running, indicating that a multisite reservation is in effect, the closeout shall be accomplished as per 3.1.2.7.4.2.8. An uncompleted message, present when the closeout is accepted, shall be cancelled

## 3.1.2.7.6 ENHANCED UPLINK ELM PROTOCOL

*Note.— The enhanced uplink ELM protocol provides a higher data link capacity by permitting parallel delivery of uplink ELM messages by up to sixteen interrogators, one for each II code. Operation without the need for multisite uplink ELM reservations is possible in regions of overlapping coverage for interrogators equipped for the enhanced uplink ELM protocol. The protocol is fully conformant to the standard multisite protocol and thus is compatible with interrogators that are note quipped for the enhanced protocol.*

### 3.1.2.7.6.1 General

**3.1.2.7.6.1.1** The interrogator shall determine from the data link capability report whether the transponder supports the enhanced protocols. If the enhanced protocols are supported, uplink ELMs delivered using the multisite protocol may be delivered without a prior reservation. If the enhanced protocols are not supported by both the interrogator and the transponder, the multisite reservation protocols specified in 3.1.2.7.4.1 shall be used.

**3.1.2.7.6.1.2** If the transponder and the interrogator are equipped for the enhanced protocol, the interrogator should use the enhanced uplink protocol.

**3.1.2.7.6.1.3** The transponder shall be capable of storing a sixteen segment message for each of the sixteen II codes.

**3.1.2.7.6.2** **Reservation processing.** The transponder shall support reservation processing for each II code as specified in3.1.2.7.4.1

**3.1.2.7.6.3** **Enhanced uplink ELM delivery and closeout.** The transponder shall process received segments separately by II code. For each value of II code, uplink ELM delivery and closeout shall be performed as specified in 3.1.2.7.4.2 except that the MD field used to transmit the technical acknowledgment shall also contain the 4-bit (33-36) IIS subfield.

**3.1.2.7.7 MULTISITE DOWNLINK ELM PROTOCOL**

**3.1.2.7.7.1** **Initialization**. The transponder shall announce the presence of a downlink ELM of n segments by making the binary code corresponding to the decimal value 15 + n available for insertion in the DR field of a surveillance or Comm-B reply, DF equals 4, 5, 20, 21. This announcement shall remain active until the ELM is closed out (3.1.2.7.7.3, 3.1.2.7.8.1).

**3.1.2.7.7.1.1** **Multisite downlink ELM reservation**. An interrogator shall request a reservation for extraction of a downlink ELM by transmitting a surveillance or Comm-A interrogation containing:

DI = 1
IIS = assigned interrogator identifier
MES = 3 or 6 (downlink ELM reservation request)

**3.1.2.7.7.1.1.1** Protocol procedure in response to this interrogation shall depend upon the state of the D-timer which indicates if a downlink ELM reservation is active. This timer shall run for TR seconds.

a) if the D-timer is not running, the transponder shall grant a reservation to the requesting interrogator by:
   1) storing the IIS of the interrogation as the Comm-D II; and
   2) starting the D-timer.

A multisite downlink ELM reservation shall not be granted by the transponder unless a downlink ELM is waiting to be transmitted.

b) if the D-timer is running and the IIS of the interrogation equals the Comm-D II, the transponder shall restart the D-timer; and

c) if the D-timer is running and the IIS of the interrogation does not equal

the Comm-D II, there shall be no change to the Comm-D II or D-timer.

**3.1.2.7.7.1.1.2** An interrogator shall determine if it is the reserved site through coding in the UM field and, if so, it may proceed to request delivery of the downlink ELM. Otherwise, ELM activity shall not be started during this scan and a new reservation request may be made during the next scan.

**3.1.2.7.7.1.1.3** If downlink ELM activity is not completed on the current scan, the interrogator shall ensure that it still has a reservation before requesting additional segments on a subsequent scan.

**3.1.2.7.7.1.2 Multisite-directed downlink ELM transmissions**. To direct a downlink ELM message to a specific interrogator, the multisite downlink ELM protocol shall be used. When the D-timer is not running, the interrogator identifier of the desired destination shall be stored as the Comm-D II. Simultaneously, the D-timer shall be started and the DR code (3.1.2.7.7.1) shall be set. For a multisite-directed downlink ELM, the D-timer shall not automatically time out but shall continue to run until:

a) the message is read and closed out by the reserved site; or
b) the message is cancelled (3.1.2.10.5.4) by the data link avionics.

**3.1.2.7.7.2 Delivery of downlink ELMs**. The interrogator shall extract a downlink ELM by transmitting a Comm-C interrogation with RC equals 3. This interrogation shall carry the SRS subfield which specifies the segments to be transmitted. On receipt of this request, the transponder shall transfer the requested segments by means of Comm-D replies with KE equals 0 and ND corresponding to the number of the segment in MD. The first segment shall be transmitted 128 microseconds plus or minus 0.25 microsecond following the sync phase reversal of the interrogation requesting delivery and subsequent segments shall be transmitted at a rate of one every 136 microseconds plus or minus 1 microsecond. If a request is received to transmit downlink ELM segments and no message is waiting, each reply segment shall contain all ZEROs in the MD field.

**3.1.2.7.7.2.1 SRS, segment request subfield in MC**. This 16-bit (9-24) uplink subfield in MC shall request the transponder to transfer downlink ELM segments. Starting with bit 9, which denotes segment number 0, each of the following bits shall be set to ONE if the transmission of the corresponding segment is requested. SRS shall appear in MC if RC equals 3 in the same interrogation.

**3.1.2.7.7.2.2 D-timer restart**. The D-timer shall be restarted each time that a request for Comm-D segments is received if the Comm-D II is non-zero.

**3.1.2.7.7.3 Multisite downlink ELM closeout**. The interrogator shall close out a multisite downlink ELM by transmitting either a surveillance or a Comm-A interrogation containing:

either DI = 1
IIS = assigned interrogator identifier
MES = 4, 5 or 7 (downlink ELM closeout)

or DI = 0, 1 or7
IIS = assigned interrogator identifier
PC = 6 (downlink ELM closeout)

The transponder shall compare the IIS of the interrogation to the Comm-D II and if the interrogator identifiers do not match, the state of the downlink process shall not be changed.

If the interrogator identifiers match, and if a request for transmission has been complied with at least once, the transponder shall set the Comm-D II to 0, reset the D-timer, clear the DR code for this message and clear the message itself.

If another downlink ELM is waiting to be transmitted, the transponder shall set the DR code (if no Comm-B message is waiting to be delivered) so that the reply contains the announcement of the next message.

**3.1.2.7.7.4 Automatic expiration of downlink ELM reservation**. If the D-timer period expires before a multisite closeout has been accomplished, the Comm-D II shall be set to 0, and the D-timer reset. The message and DR code shall not be cleared.

**3.1.2.7.8 NON-SELECTIVE DOWNLINKELM**

Non-selective downlink ELM delivery shall take place as described in 3.1.2.7.7.2.

**3.1.2.7.8.1 Non-selective downlink ELM closeout**. The interrogator shall close out a non-selective downlink ELM by transmitting PC equals 6 (downlink ELM closeout) in a surveillance or Comm-A interrogation. On receipt of this command, and if a request for transmission has been complied with at least once, the transponder shall perform closeout unless the D-timer is running. If the D-timer is running, indicating that a multisite reservation is in effect, the closeout shall be accomplished as per 3.1.2.7.7.3.

**3.1.2.7.9 ENHANCED DOWNLINK ELM PROTOCOL**

**3.1.2.7.9.1 General**

**3.1.2.7.9.1.1** The interrogator shall determine from the data link capability report whether the transponder supports the enhanced protocols. If the enhanced protocols are supported, downlink ELMs delivered using the multisite-directed protocol may be delivered without a prior reservation. If the enhanced protocols are not supported by both the interrogator and the transponder, the multisite reservation protocols specified in 3.1.2.6.11 shall be used for multisite and multisite-directed downlink ELMs.

**3.1.2.7.9.1.2** If the transponder and the interrogator are equipped for the enhanced protocol, the interrogator should use the enhanced downlink protocol.

**3.1.2.7.9.2 Enhanced multisite downlink ELM protocol**

**3.1.2.7.9.2.1** The transponder shall be capable of storing a sixteen segment message for each of the sixteen II codes.

**3.1.2.7.9.2.2** **Initialization**. A multisite message input into the transponder shall be stored in the registers assigned to II =0.

**3.1.2.7.9.2.3** **Announcement and extraction**. A waiting multisite downlink ELM message shall be announced in the DR field of the replies to all interrogators for which a multisite directed downlink ELM message is not waiting. The UM field of the announcement reply shall indicate that the message is not reserved for any II code, i.e. the IIS subfield shall be set to 0. When a command to reserve this message is received from a given interrogator, the message shall be reserved for the II code contained in the interrogation from that interrogator. After readout and until closeout, the message shall continue to be assigned to that II code. Once a message is assigned to a specific II code, announcement of this message shall no longer be made in the replies to interrogators with other II codes. If the message is not closed out by the associated interrogator for the period of the D-timer, the message shall revert back to multisite status and the process shall repeat. Only one multisite downlink ELM message shall be in process at a time.

**3.1.2.7.9.2.4** **Closeout**. A closeout for a multisite message shall only be accepted from the interrogator that was assigned most recently to transfer the message.

**3.1.2.7.9.2.5 Announcement of the next message waiting**. The DR field shall indicate a message waiting in the reply to an interrogation containing a downlink ELM closeout if an unassigned multisite downlink ELM is waiting, or if a multisite directed message is waiting for that II code (3.1.2.7.9.2).

**3.1.2.7.9.3 Enhanced multisite directed downlink ELM protocol**

**3.1.2.7.9.3.1 Initialization**. When a multisite directed message is input into the transponder, it shall be placed in the downlink ELM registers assigned to the II code specified for the message. If the registers for this II code are already in use (i.e. a multisite directed downlink ELM message is already in process for this II code), the new message shall be queued until the current transaction with that II code is closed out.

**3.1.2.7.9.3.2 Announcement**. Announcement of a downlink ELM message waiting transfer shall be made using the DR field as specified in 3.1.2.7.7.1 with the destination interrogator II code contained in the IIS subfield as specified in 3.1.2.6.5.3.2. The DR field and IIS subfield contents shall be set specifically for the interrogator that is to receive the reply. A waiting multisite directed message shall only be announced in the replies to the intended interrogator. It shall not be announced in replies to other interrogators.

**3.1.2.7.9.3.3 Delivery**. An interrogator shall determine if it is the reserved site through coding in the UM field and, if so, it may proceed to request delivery of the downlink ELM. The delivery shall be performed as specified in 3.1.2.7.7.2. The transponder shall transmit the message contained in the buffer associated with the II code specified in the IIS subfield of the segment request interrogation.

**3.1.2.7.9.3.4 Closeout.** Closeout shall be accomplished as specified in 3.1.2.7.7.3 except that a message closeout shall only be accepted from the interrogator with a II code equal to the one that transferred the message.

**3.1.2.7.9.3.5 Announcement of the next message waiting**. The DR field shall indicate a message waiting in the reply to an interrogation containing a downlink ELM closeout if another multisite directed message is waiting for that II code, or if a downlink message is waiting that has not been assigned a II code (3.1.2.7.9.2).

**3.1.2.7.9.4 Enhanced non-selective downlink ELM protocol**. The availability of a non-selective downlink ELM message shall be announced to all interrogators. Otherwise, the protocol shall be as specified in3.1.2.7.7.

### 3.1.2.8 AIR-AIR SERVICE AND SQUITTERTRANSACTIONS

#### 3.1.2.8.1 SHOR AIR-AIR SURVEILLANCE, ULINK FORMAT0

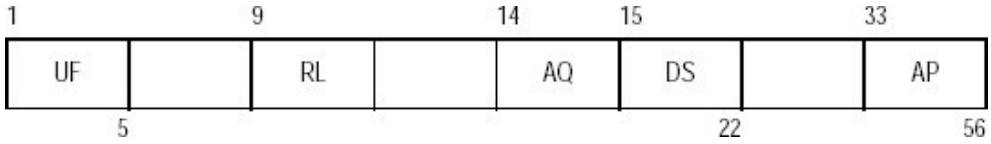


The format of this interrogation shall consist of these fields:

| Field | Reference |
|---|---|
| UF uplink format | 3.1.2.3.2.1.1 |
| spare - 3 bits | |
| RL reply length | 3.1.2.8.1.2 |
| spare - 4 bits | |
| AQ acquisition | 3.1.2.8.1.1 |
| DS data selector | 3.1.2.8.1.3 |
| spare - 10 bits | |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.8.1.1** **AQ: Acquisition**. This 1-bit (14) uplink field shall contain a code which controls the content of the RI field.

**3.1.2.8.1.2** **RL: Reply length**. This 1-bit (9) uplink field shall command the format to be used for the reply.

Coding
0 signifies a reply with DF =0
1 signifies no reply

**3.1.2.8.1.3** **DS: Data selector**. This 8-bit (15-22) uplink field shall contain the BDS code (3.1.2.6.11.2.1) of the GICB register whose contents shall be returned to the corresponding reply with DF equals16.

#### 3.1.2.8.2 SHORT AIR-AIR SURVEILLANCE, DOWNLINK FORMAT0




This reply shall be sent in response to an interrogation with UF equals 0 and RL equals 0. The format of this reply shall consist of these fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| VS vertical status | 3.1.2.8.2.1 |
| CC cross-link capability | 3.1.2.8.2.3 |

spare - 1bit
SL Sensitivity level ACAS 4.3.8.4.2.5
RI reply information 3.1.2.8.2.2
spare - 2 bits
AC altitude code 3.1.2.6.5.4
AP address/parity 3.1.2.3.2.1.3

**3.1.2.8.2.1** **VS: Vertical status**: This 1-bit (6) downlink field shall indicate the effective air/ground state (3.1.2.4.3.3).

**Coding**

0 signifies that the effective air/ground state is “airborne”
1 signifies that the effective air/ground state is “on-the-ground”

**3.1.2.8.2.2** **RI: Reply information, air-air**. This 4-bit (14-17) downlink field shall report the aircraft’s maximum cruising true airspeed capability and type of reply to interrogating aircraft. The coding shall be as follows:

0 signifies a reply to an air-air interrogation UF = 0 with AQ = 0, no operating ACAS
1-7 reserved for ACAS
8-15 signifies a reply to an air-air interrogation UF = 0 with AQ = 1 and that the maximum airspeed is as follows:
8 no maximum airspeed data available
9 maximum airspeed is .LE. 140 km/h (75kt)
10 maximum airspeed is .GT. 140 and .LE. 280 km/h (75 and 150kt)
11 maximum airspeed is.GT.280and.LE.560km/h (150and300kt)
12 maximum airspeed is.GT.560and.LE.1110km/h (300and600kt)
13 maximum airspeed is .GT. 1 110 and .LE. 2 220 km/h (600 and 1200kt)
14 maximum airspeed is more than 2 220 km/h (1 200kt)
15 not assigned.

**3.1.2.8.2.3** **CC: Cross-link capability**. This 1-bit (7) downlink field shall indicate the ability of the transponder to support the cross-link capability, i.e. decode the contents of the DS field in an interrogation with UF equals 0 and respond with the contents of the specified GICB register in the corresponding reply with DF equals 16.

Coding

0 signifies that the transponder cannot support the cross-link capability
1 signifies that the transponder supports the cross-link capability.

### 3.1.2.8.3 LONG AIR-AIR SURVEILLANCE, DOWNLINK FORMAT16



This reply shall be sent in response to an interrogation with UF equals 0 and RL equals 1. The format of this reply shall consist of these fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| VS vertical status | 3.1.2.8.2.1 |
| spare - - 2 bits | |
| SL Sensitivity level, ACAS | 4.3.8.4.2.5 |
| RI reply information | 3.1.2.8.2.2 |
| spare - 2 bits | |
| AC altitude code | 3.1.2.6.5.4 |
| MV message, ACAS | 3.1.2.8.3.1 |
| AP address/parity | 3.1.2.3.2.1.3 |

**3.1.2.8.3.1 MV: Message, ACAS.** This 56-bit (33-88) downlink field shall contain GICB information as requested in the DS field of the UF 0 interrogation that elicited the reply.

### 3.1.2.8.4 AIR-AIR TRANSACTIONPROTOCOL

*Note.— Interrogation-reply coordination for the air-air formats follows the protocol outlined in Table 3-5 (3.1.2.4.1.3.2.2).*

The most significant bit (bit 14) of the RI field of an air-air reply shall replicate the value of the AQ field (bit 14) received in an interrogation with UF equals 0.

If AQ equals 0 in the interrogation, the RI field of the reply shall contain the value 0.

If AQ equals 1 in the interrogation, the RI field of the reply shall contain the maximum cruising true airspeed capability of the aircraft as defined in 3.1.2.8.2.2.

In response to a UF = 0 with RL = 1 and DS≠0, the transponder shall reply with a DF = 16 reply in which the MV field shall contain the contents of the GICB register designated by the DS value. If the requested register is not serviced by the aircraft installation, the transponder shall reply and the MV field of the reply shall contain all ZEROs.

### 3.1.2.8.5 ACQUISITION SQUITTER

**3.1.2.8.5.1 Acquisition squitter format**. The format used for acquisition squitter transmissions shall be the all-call reply, (DF = 11) with II =0.

**3.1.2.8.5.2** **Acquisition squitter rate**. Acquisition squitter transmissions shall be emitted at random intervals that are uniformly distributed over the range from 0.8 to 1.2 seconds using a time quantization of no greater than 15 milliseconds relative to the previous acquisition squitter, with the following exceptions:

a) the scheduled acquisition squitter shall be delayed if the transponder is in a transaction cycle(3.1.2.4.1);

b) the acquisition squitter shall be delayed if an extended squitter is in process;

c) the scheduled acquisition squitter shall be delayed if a mutual suppression interface is active (see Note 1 below);or

d) when the effective air/ground state is “on-the-ground”, acquisition squitters shall be transmitted only when the surface position extended squitter. ADS-B messages are not being transmitted (3.1.2.8.6.3.2).

An acquisition squitter shall not be interrupted by link transactions or mutual suppression activity after the squitter transmission has begun.

**3.1.2.8.5.3** **Acquisition squitter antenna selection.** Transponders operating with antenna diversity (3.1.2.10.4) shall transmit acquisition squitters as follows:

a) when the effective air/ground state is “airborne” (3.1.2.4.3.3), the transponder shall transmit acquisition squitters alternately from the two antennas; and

b) when the effective air/ground state is “on-the-ground” (3.1.2.4.3.3), the transponder shall transmit acquisition squitters from the top antenna only.

**3.1.2.8.6 EXTENDED SQUITTER DOWNLINK FORMAT17**

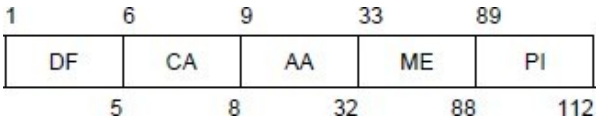


*Note.— SSR Mode S transponders transmit extended squitters to support the broadcast of aircraft-derived position for surveillance purposes. The broadcast of this type of information is a form of automatic dependent surveillance (ADS) known as ADS-broadcast (ADS-B).*

**3.1.2.8.6.1** **Extended squitter format.** The format used for the extended squitter shall be a 112-bit downlink format (DF = 17) containing the following fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| CA capability | 3.1.2.5.2.2.1 |

| | |
|---|---|
| AA address, announced | 3.1.2.5.2.2.2 |
| ME message extended squitter | 3.1.2.8.6.2 |
| PI parity/interrogator identifier | 3.1.2.3.2.1.4 |

The PI field shall be encoded with II equal to 0.

**3.1.2.8.6.2** ***ME: Message, extended squitter.*** This 56-bit (33-88) downlink field in DF = 17 shall be used to transmit broadcast messages. Extended squitter shall be supported by registers 05, 06, 07, 08, 09, 0A {HEX} and 61-6F {HEX} and shall conform to either version 0, version 1, version 2 or version 3 message formats as described below:

a) Version 0 ES message formats and related requirements report surveillance quality by navigation uncertainty category (NUC), which can be an indication of either the accuracy or integrity of the navigation data used by ADS-B. However, there is no indication as to which of these, integrity or accuracy, the NUC value is providing an indication of.

b) Version 1 ES message formats and related requirements report surveillance accuracy and integrity separately as navigation accuracy category (NAC), navigation integrity category (NIC) and surveillance integrity level (SIL). Version 1 ES formats also include provisions for enhanced reporting of status information;

c) Version 2 ES message formats and related requirements contain the provisions of version 1 but further enhance integrity and parameter reporting. Version 2 ES formats separately report position source integrity from the integrity of the ADS-B transmitting equipment. Version 2 ES formats also separate vertical accuracy reporting from horizontal position accuracy, remove vertical integrity from position integrity, and provide for the reporting of the SSR Mode A code, GNSS antenna offset and additional horizontal position integrity values. Version 2 ES formats also modify the target state report to include selected altitude, selected heading, and barometric pressure setting.

d) Version 3 ES message formats and related requirements contain the provisions of Version 2 and incorporate additional capabilities. Version 3 ES improves reporting of geometric altitude, supports the broadcast of weather and aircraft parameters in support of air-to-air and air-to-ground weather application as well as improves emitter category classifications. Version 3 also includes support for UAS/RPAS operations as well as position and velocity reporting to accommodate altitude and velocities not supported by previous versions. To enable monitoring of interrogation rates detected and transmitted reply rates by a transponder, Version 3 supports the broadcast of such transponder activity. Version 3 additionally reports transponder antenna offset, an indication of Mode S reply rate limiting status as well as ACAS coordination capability reporting.

*Note 1.— The formats and update rates of each register are specified in Doc 9871. The formats and update rates for individual squitters are defined by the version number of the extended squitter.*

*Note 2.— The formats for the four different versions are interoperable. An extended squitter receiver can*

*recognize and decode signals of its own version, as well as lower versions message formats. The receiver, however, can decode higher version signals according to its own capability.*

*Note3.—Guidance material on transponder register formats and data sources is included in the* Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871).*

**3.1.2.8.6.3 Extended squitter types**

*Note.— Extended squitter types described from 3.1.2.8.6.3.1 to 3.1.2.8.6.3.15 are defined in Doc 9871.*

**3.1.2.8.6.3.1 Airborne position squitter**. The airborne position extended squitter type shall use format DF = 17 with the contents of GICB register 05 {HEX} inserted in the ME field.

**3.1.2.8.6.3.1.1 SSS, surveillance status subfield in ME**. The transponder shall report the surveillance status of the transponder in this 2-bit (38, 39) subfield of ME when ME contains an airborne position message.

**Coding**

0 signifies no status information
1 signifies transponder reporting permanent alert condition (3.1.2.6.10.1.1.1)
2 signifies transponder reporting a temporary alert condition (3.1.2.6.10.1.1.2)
3 signifies transponder reporting SPI condition (3.1.2.6.10.1.3)

Codes 1 and 2 shall take precedence over code 3.

**3.1.2.8.6.3.1.2 ACS, altitude code subfield in ME**. The transponder shall report either navigation-derived altitude, or the barometric altitude code in this 12-bit (41-52) subfield of ME when ME contains an airborne position message. When barometric altitude is reported, the contents of the ACS shall be as specified for the 13-bit AC field (3.1.2.6.5.4) except that the M-bit (bit 26) shall be omitted.

**3.1.2.8.6.3.2 Surface position squitter**. The surface position extended squitter type shall use format DF = 17 with the contents of GICB register 06 {HEX} inserted in the ME field.

**3.1.2.8.6.3.3 Aircraft identification squitter**. The aircraft identification extended squitter type shall use format DF = 17 with the contents of GICB register 08 {HEX} inserted in the ME field.

**3.1.2.8.6.3.4 Airborne velocity squitter**. The airborne velocity extended squitter type shall use format DF = 17 with the contents of GICB register 09 {HEX} inserted in the ME field.

**3.1.2.8.6.3.5** Aircraft operational status squitter. The aircraft operational status extended squitter type shall use format DF = 17 with the contents of GICB register 65 {HEX} inserted in the ME field.

**3.1.2.8.6.3.6** Target state and status squitter. The target state and status extended squitter type shall use format DF = 17 with the contents of GICB register 62 {HEX} inserted in the ME field.

**3.1.2.8.6.3.7** "Emergency/priority status" squitter. The "emergency/priority status" extended squitter type shall use format DF = 17 with the contents of GICB register 61 {HEX} inserted in the ME field.

**3.1.2.8.6.3.8** TCAS RA broadcast squitter. The TCAS RA broadcast extended squitter type shall use format DF = 17 with the contents of GICB register 30 {HEX} inserted in the ME field.

Note.— In ADS-B Version 2, the TCAS RA broadcast extended squitter information was transmitted using the contents in GICB register 61 {HEX} subtype equal to 2.

**3.1.2.8.6.3.9** HVA position squitter. The HVA position extended squitter type shall use format DF = 17 with the contents of GICB register 6E {HEX} inserted in the ME field.

**3.1.2.8.6.3.10** HVA velocity squitter. The HVA velocity extended squitter type shall use format DF = 17 with the contents of GICB register 6F {HEX} inserted in the ME field.

**3.1.2.8.6.3.11** "UAS/RPAS contingency" current/next TCP squitters. The "UAS/RPAS contingency" current/next TCP extended squitter type shall use format DF = 17 with the contents of GICB register 63 {HEX} to 64 {HEX} inserted in the ME field.

**3.1.2.8.6.3.12** ADS-B Wx AIREP squitters. The ADS-B Wx AIREP extended squitter types shall use the contents of GICB register 68 {HEX} to 6A {HEX}, as applicable, to insert the appropriate aircraft or weather state information in the ME field.

**3.1.2.8.6.3.13** ADS-B Wx PIREP squitters. The ADS-B Wx PIREP extended squitter types shall use the contents of GICB registers 6B {HEX} to 6D {HEX}, as applicable, to insert the appropriate aircraft or weather state information in the ME field.

**3.1.2.8.6.3.14** Extended Squitter event-driven information. The event-driven message shall use format DF = 17 with the contents of GICB register 0A {HEX} inserted in the ME field.

Note.— Although labeled as extended squitter, prior to Version 3, this message would only be broadcast once each time the register was loaded with information. ADS-B

Version 3 removed the implementation of this register.

**3.1.2.8.6.3.15** Interrogation/reply monitor squitters. The interrogation/reply monitor squitter types shall use format DF = 17 with the contents of GICB registers 66 {HEX} to 67 {HEX} inserted in the ME field.

**3.1.2.8.6.4 Extended squitter rate**

**3.1.2.8.6.4.1 Initialization:** At power up initialization, the transponder shall commence operation in a mode which it mode in which it does not transmit extended squitters. The initialization determination shall be made individually for each squitter type.

**3.1.2.8.6.4.2 Airborne position squitter rate**. Airborne position squitter transmissions shall be emitted when the broadcast message format (see 3.1.2.8.6.7) "airborne" and the HVA position squitter is not transmitted. Airborne position squitter transmissions shall be emitted at random intervals that are uniformly distributed over the range from 0.4 to 0.6 seconds using a time quantization of no greater than 15 milliseconds relative to the previous airborne position squitter, with the exceptions as specified in 3.1.2.8.6.4.7.

*Note.— Selection criteria for the airborne and HVA position squitters are specified in Doc 9871.*

**3.1.2.8.6.4.3 Surface position squitter rate**. Surface position squitter transmissions shall be emitted when broadcast message format (see 3.1.2.8.6.7) is "surface" using one of two rates depending upon whether the high or low squitter rate has been selected (3.1.2.8.6.9). When the high squitter rate has been selected, surface position squitters shall be emitted at random intervals that are uniformly distributed over the range from 0.4 to
0.6 seconds using a time quantization of no greater than 15 milliseconds relative to the previous surface position squitter (termed the high rate). When the low squitter rate has been selected, surface position squitters shall be emitted at random intervals that are uniformly distributed over the range of 4.8 to
5.2 seconds using a time quantization of no greater than 15 milliseconds relative to the previous surface position squitter (termed the low rate). Exceptions to these transmission rates are specified in 3.1.2.8.6.4.7.

**3.1.2.8.6.4.4 Aircraft identification squitter rate**. Aircraft identification squitter transmissions shall be emitted at random intervals that are uniformly distributed over the range of
4.8 to 5.2 seconds using a time quantization of no greater than 15 milliseconds relative to the previous identification squitter when the aircraft is reporting the airborne position squitter type, or when the aircraft is reporting the surface position squitter type and the high rate has been selected. When the surface position squitter type is being reported at the low rate, the aircraft identification squitter shall be emitted at random intervals that are uniformly distributed over the range of 9.8 to 10.2 seconds using a time quantization of no greater than 15 milliseconds relative to the previous identification squitter. Exceptions to these transmission rates are specified in3.1.2.8.6.4.7.

**3.1.2.8.6.4.5 Airborne velocity squitter rate**. Airborne velocity squitter transmissions shall be emitted when broadcast message format (see 3.1.2.8.6.7) is “airborne” and the HVA velocity squitter is not transmitted. Airborne velocity squitter transmissions shall be emitted at random intervals that are uniformly distributed over the range from 0.4 to 0.6 seconds using a time quantization of no greater than 15 milliseconds relative to the previous airborne velocity squitter, with the exceptions as specified in 3.1.2.8.6.4.7.

**3.1.2.8.6.4.6** Other extended squitter rates. Other extended squitters shall be emitted at rates consistent with the extended squitter message type and the associated extended squitter version number.

**3.1.2.8.6.4.7** Note.— Other extended squitter rates are specified in Doc 9871**Delayed transmission**. Extended squitter transmission shall be delayed in the following circumstances:

a) if the transponder is in a transaction cycle(3.1.2.4.1);

b) if an acquisition or another type of extended squitter is in process; or

c) if a mutual suppression interface is active.

The delayed squitter shall be transmitted as soon as the transponder becomes available.

**3.1.2.8.6.5 Extended squitter antenna selection**. Transponders operating with antenna diversity (3.1.2.10.4) shall transmit extended squitters as follows:

a) when the broadcast message format (see 3.1.2.8.6.7) is “airborne”, the transponder shall transmit each type of extended squitter alternately from the two antennas; and

b) when the broadcast message format (see 3.1.2.8.6.7) is “on-the-ground”, the transponder shall transmit extended squitters from the top antenna only

**3.1.2.8.6.6 Register time-out and termination**. The transponder shall clear and terminate broadcast of information in extended squitter registers as required to prevent the reporting of outdated information.

*Note — Timeout and termination of extended squitter broadcast is specified in the Technical Provisions for Mode S Services and Extended Squitter (Doc 9871).*

### 3.1.2.8.6.7 *Extended squitter ADS-B message formats*

*Note 1.— DF = 17 message fields and formats are based on whether the aircraft is determined, by the transponder, to be on-the-ground or airborne. Level 2 and above transponders report declared air/ground status via the CA field in DF = 17 extended squitter ADS-B messages (see 3.1.2.5.2.2.1).*

*Note 2.— Extended squitter ADS-B messages are formatted based on the effective air/ground state or the broadcast message format. Effective air/ground state is set based on the declared air/ground status (see 3.1.2.4.3.3). Broadcast message format is set based on the declared air/ground status (see 3.1.2.4.3.3) and in fixed-wing aircraft may also incorporate the output of a broadcast message format algorithm (see 3.1.2.8.6.7.3).*

*Note 3.— The CA field reports the declared air/ground status (see 3.1.2.5.2.2.1). ACAS II acquires aircraft using squitters that contain the CA field. If an aircraft reports the declared air/ground status as "on-the-ground", that aircraft will not be interrogated by ACAS II in order to reduce unnecessary interrogation activity.*

*Note 4.— Use of the following technique may result in surface or airborne format extended squitter ADS-B messages being transmitted when the CA field indicates the declared air/ground status is "unknown" (CA code 6).*

***3.1.2.8.6.7.1*** *Extended squitter ADS-B message format determination for ES version numbers 0 through 2. Mode S transponders that broadcast Version 0, 1 or 2 ES messages whose formats are not determined as described in 3.1.2.8.6.7.2, shall determine the extended squitter ADS-B message format based on the effective air/ground state (see 3.1.2.4.3.3).*

***3.1.2.8.6.7.1.1*** *If the effective air/ground state is "on-the-ground", the extended squitter ADS-B message format shall be "surface".*

***3.1.2.8.6.7.1.2*** *If the effective air/ground state is "airborne", the extended squitter ADS-B message format shall be "airborne", except as follows:*

*a) for aircraft whose emitter category (see Doc 9871) is Set "A" code 2, 3, 4, 5 or 6, or Set "B" code 7, the extended squitter ADS-B message format shall be "surface" if:*

*i) if radio altitude and ground speed are available and airspeed is unavailable, and radio altitude indicates < 50 feet and ground speed indicates < 100 knots; or*

*ii) if radio altitude and airspeed are available and ground speed is unavailable, and radio altitude indicates < 50 feet and airspeed indicates < 100 knots; or*

*iii) if radio altitude, ground speed and airspeed are available and radio altitude indicates <50 feet and both ground speed and airspeed indicate < 100 knots;*

*b) for aircraft whose emitter category (see Doc 9871) is Set "A" code 2, 3, 4, 5 or 6, or Set "B" code 7, the extended squitter ADS-B message format shall be "surface" if radio altitude is unavailable and available ground speed and airspeed both indicate < 50 knots; or*

*c) for aircraft whose emitter category (see Doc 9871) is Set "C" code 1 or 2; the extended squitter ADS-B message format shall be "surface".*

***3.1.2.8.6.7.2*** *Extended squitter ADS-B message format determination for ES version numbers 3 and greater. Mode S transponders shall use the broadcast message format to determine whether to report airborne or surface extended squitter ADS-B messages.*

***3.1.2.8.6.7.2.1*** *If subsequent to the validation in 3.1.2.4.3.2 the declared air/ground status is "airborne", the broadcast message format shall be "airborne".*

***3.1.2.8.6.7.2.2*** *If subsequent to the validation in 3.1.2.4.3.2 the declared air/ground status is "on-the-ground", the broadcast message format shall be "surface".*

***3.1.2.8.6.7.2.3*** *If the emitter category (see Doc 9871) is "surface vehicle – emergency vehicle" or "surface vehicle – service vehicle", the broadcast message format shall be "surface".*

***3.1.2.8.6.7.2.4*** *If subsequent to the validation in 3.1.2.4.3.2 the declared air/ground status is "unknown" and a broadcast message format algorithm is applicable (see 3.1.2.8.6.7.3), the broadcast message format shall be determined by the broadcast message format algorithm output.*

***3.1.2.8.6.7.2.5*** *If subsequent to the validation in 3.1.2.4.3.2 the declared air/ground status is "unknown" and a broadcast message format algorithm is not applicable (see 3.1.2.8.6.7.3), the broadcast message format shall be "airborne".*

***3.1.2.8.6.7.3 Broadcast message format algorithm***

*Note.— Broadcast message format algorithm, if implemented, provides a means for fixed-wing aircraft, under certain conditions, to determine the broadcast message format using only sensor data available to the transponder. This is desirable to prevent aircraft without a means of automatically determining the on- the-ground condition from broadcasting an incorrect extended squitter ADS-B message format.*

***3.1.2.8.6.7.3.1*** *Recommendation.— If not equipped with an automatic means of determining the on- the-ground condition, aircraft whose emitter category (see Doc 9871) is Set "A" code 1, 2, 3 or 5 should implement a broadcast message format algorithm.*

***3.1.2.8.6.7.3.2*** *If implemented, broadcast message format algorithm requirements shall apply only to aircraft whose emitter category is Set "A" code 1, 2, 3 or 5.*

***3.1.2.8.6.7.3.3*** *Reported broadcast message format. If implemented, the broadcast message format algorithm shall provide a reported broadcast message format that is limited to "airborne" or "surface".*

***3.1.2.8.6.7.3.3.1*** *After start-up, if the broadcast message format algorithm does not update the reported broadcast message format within 300 seconds, or for more than 10 seconds after last reporting "surface" or "airborne", the reported broadcast message format shall be set to "airborne".*

***3.1.2.8.6.7.3.3.2*** *During taxi and take-off operations, the broadcast message format algorithm shall determine and update the reported broadcast message format prior to entering or within 5 seconds of exiting the runway transition zone, including while taxiing after landing.*

***3.1.2.8.6.7.3.3.3*** *During inflight operations, the broadcast message format algorithm shall maintain a reported broadcast message format of "airborne" while remaining outside of any runway transition zone.*

*Note.— For additional information regarding broadcast message format algorithm definitions, applicability and performance, refer to RTCA DO-260C/ED-102B §2.2.3.2.2.1.4.*

**3.1.2.8.6.8 Squitter status reporting**. Register 07 {HEX} shall be reserved in transponders conforming to ADS-B Version 3 and later.

*Note.— Technical provisions for squitter status reporting (Register 07 {HEX}) for ADS-B Version 2 and earlier can be found in Doc 9871.*

**3.1.2.8.6.9** Surface squitter rate. Surface position messages shall be initiated using the low squitter rate. The surface squitter broadcast rate ("high" or "low" as defined in 3.1.2.8.6.4.3) shall be determined as follows:

*Note.— Transponders conforming to ADS-B Version 2 and earlier examine the transmission rate subfield (TRS) to determine whether to transmit at the "high" or "low" rate. Relevant detailed technical provisions are specified in Doc 9871.*

a) the broadcast rate shall be changed from "high" to "low" when the navigation source position data has not changed more than 10 metres in any 15-minute interval ± 10 seconds;

b) upon selecting the "low" broadcast rate, the transmission device shall save the position data at the time that the "low" rate was selected (including at initialization); and

c) the broadcast rate shall be changed from "low" to "high" when the position of the transmission device has changed by 10 metres or more since the "low" rate was selected.

**3.1.2.8.6.10** Latitude/longitude coding using compact position reporting (CPR). Mode S extended squitter uses compact position reporting (CPR) to encode latitude and longitude efficiently into messages.

**3.1.2.8.6.11** ***Data insertion.*** When the transponder determines that it is time to emit an airborne position squitter, it shall insert the current value of the barometric altitude and surveillance status into the appropriate fields of register 05 {HEX}. The contents of this register shall then be inserted into the ME field of DF = 17 and transmitted.

*Note.— Insertion in this manner ensures that (1) the squitter contains the latest altitude and surveillance status, and (2) ground read-out of register 05 {HEX} will yield exactly the same information as the AC field of a Mode S surveillance reply.*

### 3.1.2.8.7 Extended squitter/supplementary, downlink format 18

| | | | | |
|---|---|---|---|---|
| **10010** | **CF:3** | | | **PI:24** |

*Note 1.— This format supports the broadcast of extended squitter ADS-B messages by non- transponder devices, i.e. they are not incorporated into a Mode s transponder. A separate format is used to clearly identify this non-transponder case to prevent ACASII or extended squitter ground stations from attempting to interrogate these devices.*

*Note 2.— This format is also used for ground broadcast of ADS-B related services such as traffic information broadcast (TIS-B).*

*Note 3.— The format of the DF = 18 transmission is defined by the value of the CF field.*

**3.1.2.8.7.1** ***ES supplementary format.*** The format used for ES supplementary shall be a 112- bit downlink format (DF = 18) containing the following fields:

| *Field* | *Reference* |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| CF control field | 3.1.2.8.7.2 |
| PI parity/interrogator identifier | 3.1.2.3.2.1.4 |

The PI field shall be encoded with II equal to zero.

**3.1.2.8.7.2** ***Control field.*** This 3-bit (6-8) downlink field in DF = 18 shall be used to define the format of the 112-bit transmission as follows.

**Code 0** = ADS-B ES/NT devices that report the ICAO 24-bit address in the AA field (3.1.2.8.7)
**Code 1** = Reserved for ADS-B for ES/NT devices that use other addressing techniques in the AA field (3.1.2.8.7.3)
**Code 2** = Fine format TIS-B message
**Code 3** = Coarse format TIS-B message
**Code 4** = Reserved for TIS-B management messages
**Code 5** = TIS-B messages that relay ADS-B messages that use other addressing techniques in the AA field
**Code 6** = ADS-B rebroadcast using the same type codes and message formats as defined for DF = 17 ADS-B messages
**Code 7** = Reserved

**3.1.2.8.7.3 ADS-B for extended squitter/non-transponder (ES/NT) devices**




**3.1.2.8.7.3.1** **ES/NT format**. The format used for ES/NT shall be a 112-bit downlink format(DF = 18) containing the following fields:

| **Field** | **Reference** |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| CF control field | 3.1.2.8.7.2 |
| AA address, announced | 3.1.2.5.2.2.2 |
| ME message, extended squitter | 3.1.2.8.6.2 |
| PI parity/interrogator identifier | 3.1.2.3.2.1.4 |

The PI field shall be encoded with II or SI equal to zero.

**3.1.2.8.7.3.2 ES/NT squitter types**

**3.1.2.8.7.3.2.1 Airborne position squitter**. The airborne position type ES/NT shall use format DF = 18 with the format for register 05 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.2 Surface position squitter**. The surface position type ES/NT shall use format DF = 18 with the format for register 06 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.3 Aircraft identification squitter**. The aircraft identification type ES/NT shall use format DF = 18 with the format for register 08 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.4 Airborne velocity squitter**. The airborne velocity type ES/NT shall use format DF = 18 with the format for register 09 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.5 Aircraft operational status squitter.** The aircraft operational status extended squitter type shall use format DF = 18 with the contents of GICB register 65 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.6 Target state and status squitter.** The target state and status extended squitter type shall use format DF = 18 with the contents of GICB register 62 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.7 "Emergency/Priority status" squitter.** The "Emergency/Priority Status" extended squitter type shall use format DF = 18 with the contents of GICB register 61 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.8 HVA position squitter.** The HVA position extended squitter type shall use format DF = 18 with the contents of GICB register 6E {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.9 HVA velocity squitter.** The HVA velocity extended squitter type shall use format DF = 18 with the contents of GICB register 6F {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.10 "UAS/RPAS Contingency" Current/Next TCP squitter.** The "UAS/RPAS Contingency" Current/Next TCP extended squitter type shall use format DF = 18 with the contents of GICB register 63 {HEX} to 64 {HEX} inserted in the ME field.

**3.1.2.8.7.3.2.11 ADS-B Wx AIREP squitters.** The ADS-B Wx AIREP extended squitter types shall use format DF = 18 with the contents of GICB register 68 {HEX} to 6A {HEX}, as applicable, to insert the appropriate aircraft or weather state information in the ME field.

**3.1.2.8.7.3.2.12 ADS-B Wx PIREP squitters.** The ADS-B Wx PIREP extended squitter types shall use format DF = 18 with the contents of GICB registers 6B {HEX} to 6D {HEX}, as applicable, to insert the appropriate aircraft or weather state information in the ME field.

**3.1.2.8.7.3.2.13 Extended Squitter event-driven information.** The event-driven message shall use format DF = 18 with the contents of GICB register 0A {HEX} inserted in the ME field.

Note.— Although labeled as extended squitter, prior to Version 3 this message would only be broadcast once each time the register was loaded with information. ADS-B Version 3 removed the implementation of this register.

**3.1.2.8.7.3.3 ES/NT squitter rate**

**3.1.2.8.7.3.3.1 Initialization**. At power up initialization, the non-transponder device shall commence operation in a mode in which it does not broadcast any squitters. The non-transponder device shall initiate the broadcast of ES/NT squitters for airborne position, surface position, airborne velocity and aircraft identification when data are available for inclusion in the ME field of these squitter types. This determination shall be made individually for each squitter type. When ES/NT squitters are broadcast, transmission rates shall be as indicated in 3.1.2.8.6.4.2 to3.1.2.8.6.4.6.

*Note 1.— This suppresses the transmission of extended squitters from aircraft that are unable to report position, velocity or identity. If input to the register for the position squitter types stops for 60 seconds, broadcast will cease until data insertion resumes, except for an ES/NT device when the broadcast message format (see 3.1.2.8.6.7) is "surface" (as specified in the Technical Provisions for Mode S Services and Extended Squitter (Doc 9871)). Broadcast of airborne position squitters is not discontinued if barometric altitude data is available. Terminating broadcast of other squitter types is described in Doc 9871.*

*Note 2.— After timeout (3.1.2.8.7.6) this squitter type may contain an ME field of all zeros.*

**3.1.2.8.7.3.3.2 Delayed transmission**. ES/NT squitter transmission shall be delayed if the non-transponder device is busy broadcasting one of the other squitter types.

**3.1.2.8.7.3.3.2.1** The delayed squitter shall be transmitted as soon as the non-transponder device becomes available.

**3.1.2.8.7.3.3.3 ES/NT antenna selection**. Non-transponder devices operating with antenna diversity (3.1.2.10.4) shall transmit ES/NT squitters as follows:

a) when the broadcast message format (see 3.1.2.8.6.7) is "airborne", the non-transponder device shall transmit each type of ES/NT squitter alternately from the two antennas; and

b) when the broadcast message format (see 3.1.2.8.6.7) is "surface", the non-transponder device shall transmit ES/NT squitters from the top antenna only.

**3.1.2.8.7.3.1.1 Register timeout and termination**. The non-transponder device shall clear message fields and terminate broadcast of extended squitter messages as required to prevent the reporting of outdated information.

*Note 1.— The timeout and termination of an extended squitter broadcast is specified in the Technical Provisions for Mode S Services and Extended Squitter (Doc 9871).*

**3.1.2.8.7.3.3.4 Airborne/surface message format selection**. Non-transponder devices shall report airborne or surface format extended squitter ADS-B messages as per the requirements in 3.1.2.8.6.7.

### *3.1.2.8.7.4 Use of ES by other surveillance systems.*

#### *3.1.2.8.7.4.1 Surface system control.*

Recommendation.— When a surface surveillance system uses DF=18 as part of a surveillance function, it should not use the formats that have been allocated for the purpose of surveillance of aircraft, vehicles and/or obstacles.

*Note 1.— The formats allocated for the purpose of surveillance of aircraft, vehicles and/or obstacles are specified in the Technical Provisions for Mode S Services and Extended Squitter (Doc 9871).*

*Note 2.— The transmission of any message format used for conveying position, velocity, identification, state information, etc. may result in the initiation and maintenance of false tracks in other 1090 ES receivers. The use of these messages for this purpose may be prohibited in the future.*

#### *3.1.2.8.7.4.2 Surface system status*

Recommendation.— The surface system status message type (Type Code=24) should be the only message used to provide the status or synchronization of surface surveillance systems.

*Note.— The surface system status message is specified in the Technical Provisions for Mode S Services and Extended Squitter (Doc 9871). This message will be used only by the surface surveillance system that generated it and will be ignored by other surface systems.*

### 3.1.2.8.8 MILITARY APPLICATION, DOWNLINK FORMAT 19



*Note.— This format supports military applications. DF = 19 can be used either as a squitter or as a reply .*

**3.1.2.8.8.1** **Military format**. The format used for DF = 19 shall be a 112-bit downlink format containing the following fields:

| Field | Reference |
|---|---|
| DF downlink format | 3.1.2.3.2.1.2 |
| AF control field | 3.1.2.8.8.2 |

**3.1.2.8.8.2** **Application field**. This 3-bit (6-8) downlink field in DF = 19 shall be used to define the format of the 112-bit transmission.

Code 0 to 7 = Reserved for military use

**3.1.2.8.9 EXTENDED SQUITTER MAXIMUM TRANSMISSION RATE**

**3.1.2.8.9.1** The maximum total number of full power extended squitters (DF = 17, 18 and 19) emitted by any extended squitter installation shall not exceed the following:

1) For a transponder capable of replying to intermode Mode A/C/S all-call interrogations:

a) 6.2 messages per second averaged over 60 seconds for nominal aircraft operations with no emergency and no ACAS RA activity, while not exceeding 11 messages being transmitted in any 1-second interval; or

b) 7.4 messages per second averaged over 60 seconds under an emergency and/or ACAS RA condition, while not exceeding 11 messages being transmitted in any 1-secondinterval.

2) For a transponder that does not have the capability to reply to intermode Mode A/C/S all-call interrogations or an extended squitter non-transponder device (2.1.5.1.7):

a) 6.7 messages per second averaged over 60 seconds for nominal aircraft operations with no temporary alert, no permanent alert, no emergency, no ACAS RA and no UAS/RPAS contingency activity, while not exceeding 15 messages being transmitted in any 1-second interval; or

b) 9.2 messages per second averaged over 60 seconds under a temporary/permanent alert, an emergency, an ACAS RA and/or UAS/RPAS contingency condition, while not exceeding 19 messages being transmitted in any 1-second interval.

Note 1.— It is anticipated that the transmission of any new messages required in addition to the capability specified above will be performed using the capacity provided by phase overlay.

Note 2.— The higher extended squitter rates are associated with transponders not capable of replying to intermode Mode A/C/S all-call interrogations in order to keep an equilibrium on 1 090 MHz link that is subject to overload. It is expected to ensure that this link is maintained through their transponder regulation (for example, TSO). The minimum performance of such a transponder can be found in RTCA DO-181F or EUROCAE ED-73F or later versions.

Note 3.— A higher extended squitter rate (9.2/s) is authorized when there is an emergency, a temporary/permanent alert (Mode A code), an ACAS RA and/or a UAS contingency because such events are rare and are limited to very few platforms at the same time. Therefore, such events have a very limited effect on 1 090 MHz usage.

**3.1.2.8.9.2** For installations capable of emitting DF = 19 squitters and in accordance with 3.1.2.8.8, transmission rates for lower power DF = 19 squitters shall be limited to a peak of forty DF = 19 squitters per second, and thirty DF = 19 squitters per second averaged over 10 seconds, provided that the maximum total squitter power-rate product for the sum of full power DF = 17 squitters, full power DF = 18 squitters, full power DF = 19 squitters, and lower power DF = 19 squitters, is maintained at or below a level equivalent to the power sum of 6.2 full power squitters per second averaged over 10 seconds.

**3.1.2.8.9.3** The use of low power and higher rate DF = 19 operation (as per **3.1.2.8.9.2)** shall be in compliance with the following requirements**:**

a) it is limited to formation or element lead aircraft engaged in formation flight, directing the messages toward wing and other lead aircraft through a directional antenna with a beam width of no more than 90 degrees; and

b) the type of information contained in the DF = 19 message is limited to the same type of information in the DF = 17 message, that is, information for the sole purpose of safety-of-flight.

**3.1.2.8.9.4** All UF = 19 airborne interrogations shall be included in the interference control provisions of 4.3.2.2.2.2.

### 3.1.2.9 AIRCRAFT IDENTIFICATION PROTOCOL

**3.1.2.9.1 Aircraft identification reporting**. A ground-initiated Comm-B request (3.1.2.6.11.2) containing RR equals 18 and either DI does not equal 7 or DI equals 7 and RRS equals 0 shall cause the resulting reply to contain the aircraft identification in its MB field.

**3.1.2.9.1.1 AIS, aircraft identification subfield in MB**. The transponder shall report the aircraft identification in the 48-bit (41-88) AIS subfield of MB. The aircraft identification transmitted shall be that employed in the flight plan. When no flight plan is available, the registration marking of the aircraft shall be inserted in this subfield.

**3.1.2.9.1.2 Coding of the AIS subfield. The AIS subfield shall be coded as follows:**

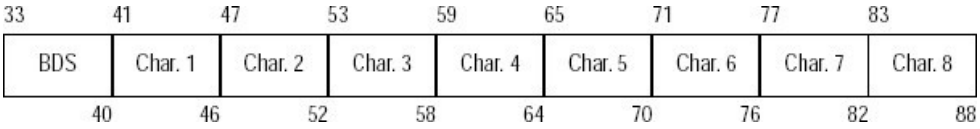


The BDS code for the aircraft identification message shall be BDS1 equals 2 (33-36) and BDS2 equals 0 (37-40).

Each character shall be coded as a 6-bit subset of the International Alphabet Number 5 (IA-5) as illustrated in Table 3-7. The character code shall be transmitted with the high order unit (b6) first and the reported aircraft identification shall be transmitted with its left-most character first. Characters shall be coded consecutively without intervening SPACE code. Any unused character spaces at the end of the subfield shall contain a SPACE character code

**Table 3-7. Phase overlay data definition**

| Phase relative to sync reference (degrees) | Binary value MSB – LSB |
|---|---|
| 0 | 000 |
| 45 | 001 |
| 90 | 010 |
| 135 | 011 |
| 180 | 100 |
| 225 | 101 |
| 270 | 110 |
| 315 | 111 |

**Table 3-8. Character coding for transmission of aircraft identification by data link**
(subset of IA-5 — see 3.1.2.9.1.2)

| | | | | $b_6$ | 0 | 0 | 1 | 1 |
|---|---|---|---|---|---|---|---|---|
| | | | | $b_5$ | 0 | 1 | 0 | 1 |
| $b_4$ | $b_3$ | $b_2$ | $b_1$ | | | | | |
| 0 | 0 | 0 | 0 | | | P | SP | 0 |
| 0 | 0 | 0 | 1 | | A | Q | | 1 |
| 0 | 0 | 1 | 0 | | B | R | | 2 |
| 0 | 0 | 1 | 1 | | C | S | | 3 |
| 0 | 1 | 0 | 0 | | D | T | | 4 |
| 0 | 1 | 0 | 1 | | E | U | | 5 |
| 0 | 1 | 1 | 0 | | F | V | | 6 |
| 0 | 1 | 1 | 1 | | G | W | | 7 |
| 1 | 0 | 0 | 0 | | H | X | | 8 |
| 1 | 0 | 0 | 1 | | I | Y | | 9 |
| 1 | 0 | 1 | 0 | | J | Z | | |
| 1 | 0 | 1 | 1 | | K | | | |
| 1 | 1 | 0 | 0 | | L | | | |
| 1 | 1 | 0 | 1 | | M | | | |
| 1 | 1 | 1 | 0 | | N | | | |
| 1 | 1 | 1 | 1 | | O | | | |

**3.1.2.9.1.3** **Aircraft identification capability report**. Transponders which respond to a ground-initiated request for aircraft identification shall report this capability in the data link capability report (3.1.2.6.10.2.2.2) by setting bit 33 of the MB subfield to1.

**3.1.2.9.1.4** **Change of aircraft identification.** If the aircraft identification reported in the AIS subfield is changed in flight, the transponder shall report the new identification to the ground by use of the Comm-B broadcast message protocol of 3.1.2.6.11.4. for BDS1 = 2 (33--36) and BDS2 = 0 (37--40). The transponder shall initiate, generate and announce the revised aircraft identification. The transponder shall ensure that the BDS code is set for the aircraft identification report in all cases, including a loss of the interface.

Note 1.— The setting of the BDS code by the transponder ensures that a broadcast change of aircraft identification will contain the BDS code for all cases of aircraft identification failure for example, the loss of the interface providing aircraft identification).

Note 2.— In some transponders certified on or prior to 1 January 2030, bits 41–88 in register 20 {HEX} were set to zero upon loss of the interface providing aircraft identification. The transponder also initiated, generated and announced the change in aircraft identification upon loss of the interface

### 3.1.2.10 ESSENTIAL SYSTEM CHARACTERISTICS OF THE SSR MODE S AND INTERMODE TRANSPONDER CAPABILITIES

**3.1.2.10.1 Transponder sensitivity and dynamic range.** Transponder sensitivity shall be defined in terms of a given interrogation signal input level and a given percentage of corresponding replies. Only correct replies containing the required bit pattern for the interrogation received shall be counted. Given an interrogation that requires a reply according to 3.1.2.4, the minimum triggering level, MTL, shall be defined as the minimum input power level for 90 per cent reply-to-interrogation ratio. The MTL shall be -74 dBm ±3 dB for Mode S interrogations (interrogations using P6), The reply- to-interrogation ratio of a Mode S transponder shall be:

a) at least 99 per cent for signal input levels between 3 dB above MTL and - 21 dBm; and

b) no more than 10 per cent at signal input levels below -81dBm.

**3.1.2.10.1.1 Reply ratio in the presence of interference**

**3.1.2.10.1.1.1 Reply ratio in the presence of an interfering pulse**. Given a Mode S interrogation which requires a reply (3.1.2.4), the reply ratio of a transponder shall be at least 95 per cent in the presence of an interfering Mode A/C interrogation pulse if the level of the interfering pulse is 6 dB or more below the signal level for Mode S input signal levels between -68 dBm and -21 dBm and the interfering pulse overlaps the P6 pulse of the Mode S interrogation anywhere after the sync phase reversal.

Under the same conditions, the reply ratio shall be at least 50 per cent if the interference pulse level is 3 dB or more below the signal level.

**3.1.2.10.1.1.2 Reply ratio in the presence of pulse pair interference**. Given Mode S interrogation which requires a reply (3.1.2.4), the reply ratio of a transponder shall be at least 90 per cent in the presence of an interfering P1 - P2 pulse pair if the level of the interfering pulse pair is 9 dB or more below signal level for input signal levels between -68 dBm and -21 dBm and the P1 pulse of the interfering pair occurs no earlier than the P1 pulse of the Mode S signal.

**3.1.2.10.1.1.3 Reply ratio in presence of low level asynchronous interference**. For all received signals between - 65 dBm and -21 dBm and given a Mode S interrogation that requires a reply according to 3.1.2.4 and if no lockout condition is in effect, the transponder shall reply correctly with at least 95 per cent reply ratio in the presence of asynchronous interference. Asynchronous interference shall be taken to be a single Mode A/C interrogation pulse occurring at all repetition rates up to 10 000 Hz at a level 12 dB or more below the level of the Mode Ssignal.

**3.1.2.10.1.1.4** Reply ratio in the presence of low-level in-band CW interference. In the presence of non-coherent CW interference at a frequency of 1 030 ±0.2 MHz at signal levels of 20 dB or more below the desired Mode A/C or Mode S interrogation signal level, the transponder shall reply correctly to at least 90 per cent of the interrogations.

**3.1.2.10.2 Transponder peak pulse power**. The peak power of each pulse of a reply shall:

a) Not be less than18.5dBW for aircraft not capable of operating at altitudes exceeding 4 570 m (15 000ft);

b) not be less than 21.0 dBW for aircraft capable of operating above 4570 m (15 000 ft);

c) not be less than 21.0 dBW for aircraft with maximum cruising speed exceeding 324 km/h (175 kt);and

d) not exceed 27.0dBW.

**3.1.2.10.2.1** Unwanted output power

**3.1.2.10.2.1.1 Inactive state transponder output power**. When the transponder is in the inactive state the peak power at 1 090 MHz plus or minus 3 MHz at the antenna end of the transmission line of the transponder shall not exceed -50 dBm when not installed with an ACAS unit or –70 dBm when installed with an ACAS unit.. The inactive state is defined as the entire period between transmissions, less 10-microsecond transition periods preceding the first pulse and plus 10-microsecond transition periods following the last pulse of the transmission (see Figure 3-11).

**3.1.2.10.2.1.2** Active state transponder output power.

3.1.2.10.2.1.2.1 The RF output power shall be less than or equal to the peak pulse power minus 50 dB for the interval starting 10 microseconds prior to the Mode S transmission and for the interval of 10 microseconds following a Mode S transmission (see Figure 3-11).

3.1.2.10.2.1.2.2 For intervals between transmitted pulses that are greater than 0.5 microsecond, the power level at the lowest point within the interval shall be 50 dB or more below the peak pulse power.

Note 1.— These power limitations protect 1 090 MHz receivers from potential missed decodes when signals are received at close range and within desired detection range. In the absence of such limits, signal levels during non-pulse intervals can occur above receiver thresholds and can lead to unintended distortion of pulse positions or false pulse decodes preventing proper detection of transmitted signals. It also makes it more difficult for receivers to decode overlapped replies.

Note 2.— It is possible that a signal transmitted 50 dB below the peak pulse power can still affect

high sensitivity receivers when transmitted in close range. More information is available in Doc 9924.

Note 3.— Information on how to verify unwanted output power can be found in RTCA DO-181F and
EUROCAE ED-73F.

Note 4.— The presence of a signal at a level of 50 dB or more below the peak power may not be measurable within the first 0.5 microsecond following the transmission of a pulse because of the allowed decay time.

Note 5.— Transmitters compliant with RTCA DO-181F and EUROCAE ED-73F meet the requirements defined in 3.1.2.10.2.1.2.

**3.1.2.10.3 SPECIAL CHARACTERISTICS**

**3.1.2.10.3.1 Mode S side-lobe suppression**

Given a Mode S interrogation that requires a reply, the transponder shall:

a) at all signal levels between MTL +3 dB and -21 dBm, have a reply ratio of less than 10 per cent if the received amplitude of P5 exceeds the received amplitude of P6 by 3 dB or more;
b) at all signal levels between MTL +3 dB and -21 dBm, have a reply ratio of at least 99 per cent if the received amplitude of P6 exceeds the received amplitude of P5 by 12 dB or more.

**3.1.2.10.3.2 Dead time.**

**3.1.2.10.3.2.1** For all transponders, shall be defined as the time interval beginning at the end of a reply transmission and ending when the receiver has regained sensitivity to within 3 dB of MTL (dead time) shall not exceed 125 microseconds'.

**3.1.2.10.3.2.2** For transponders with improved dead time, the time interval beginning at the end of a reply transmission and ending when the receiver has regained sensitivity to within 3 dB of MTL (dead time) shall not exceed 20 microseconds.

**3.1.2.10.3.3 Mode S receiver desensitization**. The transponder's receiver shall be desensitized according to 3.1.1.7.7.1 on receipt of any pulse of more than 0.7 microseconds duration.

**3.1.2.10.3.3.1 Recovery from desensitization**. Recovery from desensitization shall begin at the trailing edge of each pulse of a received signal and shall occur at the rate prescribed in 3.1.1.7.7.2, provided that no reply or data transfer is made in response to the received signal.

**3.1.2.10.3.4 Recovery after Mode S interrogations that do not elicit replies**

**3.1.2.10.3.4.1 Recovery after a single Mode S interrogation**

**3.1.2.10.3.4.1.1** The transponder shall recover sensitivity to within 3 dB of MTL no later than 128 microseconds after receipt of the sync phase reversal following a Mode S interrogation that is not accepted (3.1.2.4.1.2) or that is accepted but requires no reply.

**3.1.2.10.3.4.1.2** The transponder should recover sensitivity to within 3 dB of MTL no later than 45 microseconds after receipt of the sync phase reversal following a Mode S interrogation that is not accepted (3.1.2.4.1.2) or that is accepted but requires no reply.

**3.1.2.10.3.4.2 Recovery after a Mode S Comm-C interrogation**. A Mode S transponder with Comm-C capability shall recover sensitivity to within 3 dB of MTL no later than 45 microseconds after receipt of the sync phase reversal following acceptance of a Comm-C interrogation for which no reply is required.

**3.1.2.10.3.5 Unwanted Mode S replies**. Mode S transponders shall not generate unwanted Mode S replies more often than once in 10 seconds. Installation in the aircraft shall be made in such a manner that this standard shall be achieved when all possible interfering equipments installed in the same aircraft are operating at maximum interference levels.

**3.1.2.10.3.6 Reply rate limiting**

**3.1.2.10.3.6.1 Mode S reply rate limiting.**

3.1.2.10.3.6.1.1 Mode S reply rate limiting shall permit the minimum reply rates required in 3.1.2.10.3.7.2 and 3.1.2.10.3.7.3.

3.1.2.10.3.6.1.2 Mode S reply rate limiting type 1

3.1.2.10.3.6.1.2.1 Mode S reply rate limiting shall be separate from Modes A and C reply rate limiting.

3.1.2.10.3.6.1.2.2 The Mode S reply rate limiting shall ensure the transponder does not cease to reply to valid Mode S interrogations for a period greater than 100 milliseconds.

3.1.2.10.3.6.1.2.3 The Mode S reply rate limiting shall limit the Mode S replies to a maximum reply rate of 180 Mode S replies per second or less.

Note.— The maximum reply rate limit can be less than the 180 specified here but is greater than the minimums specified in 3.1.2.10.3.7.3.

3.1.2.10.3.6.1.2.4 The Mode S reply rate limiting shall be accomplished using methods other than sensitivity reduction.

Note.— Sensitivity-reduction rate limiting is prohibited due to the potential impact on ACAS.

3.1.2.10.3.6.1.2.5 The Mode S reply rate limiting function shall exclude the acquisition squitter (see 3.1.2.8.5) and extended squitter (see 3.1.2.8.6) transmissions.

3.1.2.10.3.6.1.2.6 The Mode S reply rate limiting function shall process received interrogations regardless of the received antenna channel.

3.1.2.10.3.6.1.2.7 The Mode S reply rate limiting function shall process received interrogations regardless of uplink format.

Note.— The Mode S reply rate limiting also includes replies to ACAS resolution and coordination messages.

3.1.2.10.3.6.1.2.8 Recommendation.— The Mode S reply rate limiting should be accomplished stochastically.

**3.1.2.10.3.6.2 Modes A and C reply rate limiting.** Mode A and C prescribed sensitivity reduction (3.1.1.7.9.2) shall not affect the Mode S performance of the transponder.

### 3.1.2.10.3.7 Minimum reply rate capability, Mode S

**3.1.2.10.3.7.1** All reply rates specified in 3.1.2.10.3.7 shall be in addition to any squitter transmissions that the transponder is required to make.

**3.1.2.10.3.7.2** **Minimum reply rate capability, Mode S**. A transponder capable of transmitting only short Mode S replies shall be able to generate replies at the following rates:

50 Mode S replies in any 1-second interval
18 Mode S replies in a 100-millisecond interval
8 Mode S replies in a 25-millisecond interval
4 Mode S replies in a 1.6-millisecond interval

In addition to any downlink ELM transmissions, a level 2, 3 or 4 transponder shall be able to generate as long replies at least:

16 of 50 Mode S replies in any 1-secondinterval
6 of 18 Mode S replies in a 100-millisecond interval
4 of 8 Mode S replies in a 25-millisecondinterval
2 of 4 Mode S replies in a 1.6-millisecond interval

Transponders used in conjunction with ACAS shall be able to generate as long replies at least:

60 Mode S replies in any 1-second interval
6 of 18 Mode S replies in a 100-millisecond interval
4 of 8 Mode S replies in a 25-millisecond interval
2 of 4 Mode S replies in a 1.6-millisecond interval

In addition to downlink ELM transmissions, a level 5 transponder shall be able to generate as long replies at least:

24 of 50 Mode S replies in any 1-second interval
9 of 18 Mode S replies in a 100-millisecond interval
6 of 8 Mode S replies in a 25-millisecond interval
2 of 4 Mode S replies in a 1.6-millisecond interval

**3.1.2.10.3.7.3 Minimum Mode S ELM peak reply rate**

At least once every second a Mode S transponder equipped for ELM downlink operation shall be capable of transmitting in a 25-millisecond interval, at least 25 per cent more segments than have been announced in the initialization (3.1.2.7.7.1). The minimum length downlink ELM capability for level 4 and 5 transponders shall be as specified in 3.1.2.10.5.2.2.2.

**3.1.2.10.3.8 Reply delay and jitter for Mode S**

**3.1.2.10.3.8.1** For all input signal levels between MTL and -21 dBm, the leading edge of the first preamble pulse of the reply (3.1.2.2.5.1.1) shall occur 128 plus or minus 0.25 microsecond after the sync phase reversal (3.1.2.1.5.2.2) of the received P6. The jitter of the reply delay shall be less than or equal to 0.08 microseconds, peak (99.9 percentile).

**3.1.2.10.3.9** **Timers**. Duration and features of timers shall be as shown in Table3-8.

All timers shall be capable of being restarted. On receipt of any start command, they shall run for their specified times. This shall occur regardless of whether they are in the running or the non-running state at the time that the start command is received. A command to reset a timer shall cause the timer to stop running and to return to its initial state in preparation for a subsequent start command.

**3.1.2.10.3.10** **Inhibition of replies**. Replies to Mode S-only all-call interrogations shall always be inhibited when the effective air/ground state is “on-the-ground”. It shall not be possible to inhibit replies to discretely addressed Mode S interrogations

**3.1.2.10.3.10.1** Aircraft should provide air / ground data to the transponder.

**3.1.2.10.3.10.2** Mode A/C replies from transponders with a Mode S capability shall be inhibited when the effective air/ground state is “on-the-ground” to prevent interference when in close proximity to an interrogator or other aircraft.

*Note.— Mode S discretely addressed interrogations do not give rise to such interference and may be required for data link communications with aircraft on the airport surface. Acquisition squitter transmissions may be used for passive surveillance of aircraft on the airport surface.*

**3.1.2.10.4 Transponder antenna system and diversity operation**. Mode S transponders equipped for diversity operation shall have two RF ports for operation with two antennas, one antenna on the top and the other on the bottom of the aircraft's fuselage. The received signal from one of the antennas shall be selected for acceptance and the reply shall be transmitted from the selected antenna only.

**3.1.2.10.4.1 Radiation pattern**. The radiation pattern of antennas when installed on an aircraft shall be nominally equivalent to that of a quarter-wave monopole on a ground plane.

**3.1.2.10.4.2 Antenna location**. The top and bottom antennas shall be mounted as near as possible to the centre line of the fuselage. Antennas shall be located so as to minimize obstruction to their fields in the horizontal plane.

**3.1.2.10.4.2.1** The horizontal distance between the top and bottom antennas should not be greater than 7.6 m (25 ft).

**3.1.2.10.4.3 Antenna selection**. Mode S transponders equipped for diversity operation shall have the capability to evaluate a pulse sequence simultaneously received on both antenna channels to determine individually for each channel if the P1 pulse and the P2 pulse of a Mode S interrogation preamble meet the requirements for a Mode S interrogation as defined in 3.1.2.1

**3.1.2.10.4.3.1** If the two channels simultaneously receive at least a P1-P2 pulse pair that meets the requirements for a Mode S interrogation, or if the two channels

simultaneously accept a complete interrogation, the antenna at which the signal strength is greater shall be selected for the reception of the remainder (if any) of the interrogation and for the transmission of the reply.

**3.1.2.10.4.3.2** If only one channel receives a pulse pair that meets the requirements for an interrogation, or if only one channel accepts an interrogation, the antenna associated with that channel shall be selected regardless of received signal strength.

**3.1.2.10.4.3.3** **Selection threshold**. If antenna selection is based on signal level, it shall be carried out at all signal levels between MTL and -21dBm.

**3.1.2.10.4.3.4** **Received signal delay tolerance**. If an interrogation is received at one antenna 0.125 microseconds or less in advance of reception at the other antenna, the interrogations shall be considered to be simultaneous interrogations, and the above antenna selection criteria applied. If an accepted interrogation is received at either antenna 0.375 microseconds or more in advance of reception at the other antenna, the antenna selected for the reply shall be that which received the earlier interrogation. If the relative time of receipt is between 0.125 and 0.375 microseconds, the transponder shall select the antenna for reply either on the basis of the simultaneous interrogation criteria or on the basis of the earlier time of arrival.

**3.1.2.10.4.4** **Diversity transmission channel isolation.** The peak RF power transmitted from the selected antenna shall exceed the power transmitted from the non-selected antenna by at least 20dB.

**3.1.2.10.4.5** **Reply delay of diversity transponders.** The total two-way transmission difference in mean reply delay between the two antenna channels (including the differential delay caused by transponder-to-antenna cables and the horizontal distance along the aircraft centerline between the two antennas) shall not exceed 0.13 microseconds for interrogations of equal amplitude. This requirement shall hold for interrogation signal strengths between MTL +3dB and -21dBm.The jitter requirements on each individual channel shall remain as specified for non-diversity transponders.

### 3.1.2.10.5 DATA PROCESSING ANDINTERFACES

**3.1.2.10.5.1** **Direct data**. Direct data shall be those which are required for the surveillance protocol of the Mode S system.

**3.1.2.10.5.1.1** **Fixed direct data.** Fixed direct data are data from the aircraft which do not change in flight and shall be:

a) the aircraft address (3.1.2.4.1.2.3.1.1 and 3.1.2.5.2.2.2);

b) the maximum airspeed (3.1.2.8.2.2); and

c) the registration marking if used for aircraft identification (3.1.2.9.1.1).

**3.1.2.10.5.1.2 Interfaces for fixed direct data**

Interfaces from the transponder to the aircraft should be designed such that the values of the fixed direct data become a function of the aircraft installation rather than of the transponder configuration.

**3.1.2.10.5.1.3 Variable direct data**. Variable direct data are data from the aircraft which may change in flight and shall be:

a) the Mode C altitude code (3.1.2.6.5.4);

b) the Mode A identity code (3.1.2.6.7.1);

c) air / ground data (3.1.2.5.2.2.1, 3.1.2.6.5.1 and 3.1.2.8.2.1);

d) the aircraft identification if different from the registration marking (3.1.2.9.1.1);and

e) the SPI condition (3.1.2.6.10.1.3).

**3.1.2.10.5.1.4 Interfaces for variable direct data**.

**3.1.2.10.5.1.4.1** A means shall be provided, while on the ground or during flight, for the SPI condition to be inserted by the pilot, without the entry or modification of other flight data.

**3.1.2.10.5.1.4.2** A means shall be provided, while on the ground or during flight, for the Mode A identity code to be displayed to the pilot and modified without the entry or modification of other flight data.

**3.1.2.10.5.1.4.3** For transponders of Level 2 and above, a means shall be provided, while on the ground or during flight, for the aircraft identification to be displayed to the pilot, and, when containing variable data (3.1.2.10.5.1.3 d), to be modified without the entry or modification of other flight data.

*Note.— Implementation of the pilot action for entry of data will be as simple and efficient as possible in order to minimize the time required and reduce the possibility of errors in the data entry.*

**3.1.2.10.5.1.4.4** Interfaces shall be included to accept the pressure-altitude and air / ground data

*Note.— A specific interface design for the variable direct data is not prescribed.*

**3.1.2.10.5.2 Indirect data**

If origins and/or destinations of indirect data are not within the transponder's enclosure, interfaces shall be used for the necessary connections.

**3.1.2.10.5.2.1 The function of interfaces**

**3.1.2.10.5.2.1.1** **Uplink standard length transaction interface**. The uplink standard length transaction interface shall transfer all bits of accepted interrogations, (with the possible exception of the AP field), except for UF = 0, 11 or16.

**3.1.2.10.5.2.1.2** **Downlink standard length transaction interface**. A transponder which transmits information originating in a peripheral device shall be able to receive bits or bit patterns for insertion at appropriate locations within the transmission. These locations shall not include those into which bit patterns generated internally by the transponder are inserted, nor the AP field of the reply.

A transponder which transmits information using the Comm-B format shall have immediate access to requested data in the sense that the transponder shall respond to an interrogation with data requested by that interrogation.

**3.1.2.10.5.2.2 Indirect data transaction rates**

**3.1.2.10.5.2.2.1** **Standard length transactions.** A transponder equipped for information transfer to and from external devices shall be capable of processing the data of at least as many replies as prescribed for minimum reply rates in 3.1.2.10.3.7.2 and uplink data from interrogations being delivered at a rate of atleast:

50 long interrogations in any 1-second interval
18 long interrogations in a 100-millisecond interval
8 long interrogations in a 25-millisecond interval
4 long interrogations in a 1.6-millisecond interval.

**3.1.2.10.5.2.2.2** **Extended length transactions**. Level 3 (2.1.5.1.3) and level 4 (2.1.5.1.4) transponders shall be able to transfer data from at least four complete sixteen segment uplink ELMs (3.1.2.7.4) in any four second interval. A level 5 transponder (2.1.5.1.5) shall be able to transfer the data from at least four complete sixteen segment uplink ELMs in any one second interval and shall be capable of accepting at least two complete sixteen segment uplink ELMs with the same II code in a 250 millisecond interval. A level 4 transponder shall be able to transmit at least one four-segment downlink ELM (3.1.2.7.7 and 3.1.2.10.3.7.3) in any one second interval. A level 5 transponder shall be able to transmit at least one sixteen segment downlink ELM in any one second interval.

**3.1.2.10.5.2.2.2.1** Level 3 and level 4 transponders should be able to accept at least two complete sixteen segment uplink ELMs in a 250 millisecond interval.

**3.1.2.10.5.2.3 Data formats for downlink aircraft parameter (DAP) standard length transactions.** The downlink standard length transaction interface is used to deliver downlink aircraft parameters (DAPs) to the transponder which makes them available to the ground. Each DAP is packed into the Comm-B format (‘MB’ field) and can be extracted using either the ground-initiated Comm-B (GICB) protocol, or using MSP downlink channel 3 via the data flash application. The formats and update rates of each register used to support DAPs (BDS 1,7; BDS 1,8 to 1,C; BDS 1,D to 1,F; BDS 4,0; BDS 5,0; BDS 6,0).

**3.1.2.10.5.3 Integrity of data content transfer**. A transponder which employs data interfaces shall include sufficient protection to ensure error rates of less than one error in 103 messages and less than one undetected error in 107 112-bit transmissions in both directions between the antenna and each interface port.

**3.1.2.10.5.4 Message cancellation**. The downlink standard length transaction interface and the extended length message interface shall include the capability to cancel a message sent to the transponder for delivery to the ground, but whose delivery cycle has not been completed (i.e. a closeout has not been accomplished by a ground interrogator).

**3.1.2.10.5.5 Air-directed messages**. The transfer of this type of message requires all of the actions indicated in 3.1.2.10.5.4 plus the transfer to the transponder of the interrogator identifier of the site that is to receive the message.

### 3.1.2.11 ESSENTIAL SYSTEM CHARACTERISTICS OF THE GROUND INTERROGATOR MODE S CAPABILITIES

**3.1.2.11.1 Interrogation repetition rates**. Mode S interrogators shall use the lowest practicable interrogation repetition rates for all interrogation modes.

**3.1.2.11.1.1 All-call interrogation repetition rate**.

**3.1.2.11.1.1.1** The interrogation repetition rate for the paired Mode S- only and Mode A/C-only all-call interrogations used for acquisition in the multisite mode shall be less than 250 per second.

**3.1.2.11.1.1.2 Maximum number of Mode S all-call replies triggered by an interrogator.** For aircraft that are not locked out, a Mode S interrogator shall not trigger, on average, more than 6 Mode S all-call replies per period of 200ms and no more than 26 Mode S all call replies counted over a period of 18 seconds.

**3.1.2.11.1.2 Interrogation repetition rate to a single aircraft**

**3.1.2.11.1.2.1 Interrogations requiring a reply**. Mode S interrogations requiring a reply shall not be transmitted to a single aircraft at intervals shorter than 400 microseconds.

**3.1.2.11.1.2.2 Uplink ELM interrogations**. The minimum time between the beginning of successive Comm-C interrogations shall be 50 microseconds.

**3.1.2.11.1.3 Transmission rate for selective interrogations**

**3.1.2.11.1.3.1** For all Mode S interrogators, the transmission rate for selective interrogations shall be:

a) less than 2400 per second averaged over a 40-millisecond interval; and

b) less than 480 into any 3-degree sector averaged over a 1-second interval.

**3.1.2.11.1.3.2** Additionally, for a Mode S interrogator that has overlapping coverage with the side lobes of any other Mode S interrogator, the transmission rate for selective interrogations shall be:

a) less than 1 200 per second averaged over a 4-second interval; and

b) less than 1 800 per second averaged over a 1-second interval.

**3.1.2.11.2 INTERROGATOR-EFFECTIVE RADIATED POWER**

The effective radiated power of all interrogation pulses should be minimized as described in 3.1.1.8.2.

**3.1.2.11.3 Inactive-state interrogator output power**. When the interrogator transmitter is not transmitting an interrogation, its output shall not exceed -5 dBm effective radiated power at any frequency between 960 MHz and 1 215MHz.

**3.1.2.11.3.1 Spurious emission radiation**

CW radiation should not exceed 76 dB below 1 watt.

**3.1.2.11.4** SPURIOUS RESPONSE

The response to signals not within the pass band should be at least 60 dB below normal sensitivity.

**3.1.2.11.5 Lockout coordination.** A Mode S interrogator shall not be operated using all-call lockout until coordination has been achieved with all other operating Mode S interrogators having any overlapping coverage volume in order to ensure that no interrogator can be denied the acquisition of Mode S-equipped aircraft. If coordination is not possible due to system designs (for example, a mobile interrogator), the interrogator shall either use passive means of acquisition or operate using lockout override (3.1.2.5.2.1.4) with supplementary acquisition (3.1.2.5.2.1.5).

**3.1.2.11.6 MOBILE INTERROGATORS**

Mobile interrogators should acquire, whenever possible, Mode S aircraft through the reception of squitters.

**Table 3-9. Timer characteristics**

| *Timer Name* | *Number* | *Reference* | *Symbol* | *Duration s* | *Tolerance s* | *Resettable* |
|---|---|---|---|---|---|---|
| Non-selective lock-out | 1 | 3.1.2.6.9.2 | $T_D$ | 18 | ±1 | no |
| Temporary alert | 1 | 3.1.2.6.10.1.1.2 | $T_C$ | 18 | ±1 | no |
| SPI | 1 | 3.1.2.6.10.1.3 | $T_I$ | 18 | ±1 | no |
| Reservations B, C, D | 3* | 3.1.2.6.11.3.1 | $T_R$ | 18 | ±1 | yes |
| Multisite lockout | 78 | 3.1.2.6.9.1 | $T_L$ | 18 | ±1 | no |
| Basic dataflash | 1 | 3.1.2.6.10.3.4.2 | $T_F$ | 30 | ±1 | no |

* As required

**Table 3-10. DAPs registers**

| *Register* | *Name* | *Data content* | *Bits* |
|---|---|---|---|
| 40 {HEX} | Selected vertical intention | MCP/FCU selected altitude | 1-13 |
| | | FMS selected altitude | 14-26 |
| | | Barometric pressure setting minus 800 mb | 27-39 |
| | | MCP/FCU mode bits | 48-51 |
| | | Target altitude source bits | 54-56 |
| 50 {HEX} | Track and turn report | Roll angle | 1-11 |
| | | True track angle | 12-23 |
| | | Ground speed | 24-34 |
| | | Track angle rate | 35-45 |
| | | True airspeed | 46-56 |
| 60 {HEX} | Heading and speed report | Magnetic heading | 1-12 |
| | | Indicated airspeed | 13-23 |
| | | Mach | 24-34 |
| | | Barometric altitude rate | 35-45 |
| | | Inertial vertical velocity | 46-56 |

**Table 3-11. Transmitted interrogation signal details**

| *Function* | *Value* | *Reference* |
|---|---|---|
| | ***Mode A/C*** | |
| Carrier frequency | 1 030 ±0.20 MHz | 3.1.1.1.1 – 3.1.1.1.2 |
| Pulse interval $P_1 – P_3$ (Mode A) | 8 ±0.18 microsecond | 3.1.1.4.3 |
| Pulse interval $P_1 – P_3$ (Mode C) | 21 ±0.18 microsecond | 3.1.1.4.3 |
| Pulse interval $P_1 – P_2$ | 2 ±0.10 microsecond | 3.1.1.4.4 |
| Pulse duration $P_1$, $P_2$, $P_3$ | 0.8 ±0.09 microsecond | 3.1.1.4.5 |
| Pulse rise times | 0.05 microsecond minimum, 0.10 microsecond maximum | 3.1.1.4.6 |
| Pulse decay times | 0.05 microsecond minimum, 0.20 microsecond maximum | 3.1.1.4.7 |
| Pulse amplitude $P_3$ | $P_1$ ±0.5 dB | 3.1.1.5.2 |
| | ***Intermode*** | |
| Carrier frequency | 1 030 ±0.01 MHz | 3.1.2.1.1 |
| Pulse duration $P_1$, $P_2$, $P_3$, $P_4$ | 0.8 ±0.09 microsecond | 3.1.2.1.4.1 |
| Pulse rise times | 0.05 microsecond minimum, 0.10 microsecond maximum | 3.1.2.1.4.1 |
| Pulse decay times | 0.05 microsecond minimum, 0.20 microsecond maximum | 3.1.2.1.4.1 |
| Pulse interval $P_1 – P_3$ | 8 ±0.18 microsecond | 3.1.2.1.5.1.2.1 (Mode A-Only All-Call) |
| Pulse interval $P_1 – P_3$ | 21 ±0.18 microsecond | 3.1.2.1.5.1.2.1 (Mode C-Only All-Call) |
| Pulse interval $P_1 – P_2$ | 2 ±0.04 microsecond | 3.1.2.1.5.1.2.1 |
| Pulse interval $P_3 – P_4$ | 2 ±0.04 microsecond | 3.1.2.1.5.1.2.1 |
| Pulse amplitude $P_3$ | $P_1$ ±0.5 dB | 3.1.2.1.5.1.2.2 |
| Pulse amplitude $P_4$ | $P_3$ –0.5 dB/+2.5 dB | 3.1.2.1.5.1.2.2 |
| | ***Mode S*** | |

| | | |
|---|---|---|
| Carrier frequency | 1 030 ±0.01 MHz | 3.1.2.1.1 |
| Pulse duration $P_1$, $P_2$, $P_3$, $P_5$ | 0.8 ±0.09 microsecond | 3.1.2.1.4.1 |
| Pulse duration $P_6$ (short) | 16.25 ±0.20 microsecond | 3.1.2.1.4.1 |
| Pulse duration $P_6$ (long) | 30.25 ±0.20 microsecond | 3.1.2.1.4.1 |
| Pulse rise times | 0.05 microsecond minimum,<br>0.10 microsecond maximum | 3.1.2.1.4.1 |
| Pulse decay times | 0.05 microsecond minimum,<br>0.20 microsecond maximum | 3.1.2.1.4.1 |
| Pulse interval $P_1 – P_2$ | 2 ±0.04 microsecond | 3.1.2.1.5.2.4 |
| Pulse interval $P_2$ – sync phase reversal | 2.75 ±0.04 microsecond | 3.1.2.1.5.2.4 |
| Pulse interval $P_6$ – sync phase reversal | 1.25 ±0.04 microsecond | 3.1.2.1.5.2.4 |
| Pulse interval $P_5$ – sync phase reversal | 0.4 ±0.04 microsecond | 3.1.2.1.5.2.4 |
| Pulse amplitude $P_2$ | Equal to or greater than $P_1$ – 0.25 dB | 3.1.2.1.5.2.5 |
| Pulse amplitude first microsecond $P_6$ | Equal to or greater than $P_1$ – 0.25 dB | 3.1.2.1.5.2.5 |

**Table 3-12. Phase overlay message type field definition**

| Message type value | Forward error correction | Meaning |
|---|---|---|
| 0 | N/A | No data |
| 1 | RS | ADSB state and status message |
| 2 | | Mode S GICB data |
| 3 | | Interrogation/reply monitor message |
| 4 | | Test message |
| 5 | | DF-18 (ADS-R, ADS-SLR, TISB) |
| 6 | | Undefined |
| 7 | LDPC | ADSB state and status message |
| 8 | | Mode S GICB data |
| 9 | | Interrogation/reply monitor message |
| 10 | | Test message |
| 11 | | DF-18 (ADS-R, ADS-SLR, TISB) |
| 12 | | Undefined |
| 13–255 | Reserved | |

**Table 3-13. Phase overlay LDPC data structure**

| Block # | Phase message data bit (34 bits) | Phase parity correction data bit (20 bits) |
|---|---|---|
| 1 | 1–34 | 205–224 |
| 2 | 35–68 | 225–244 |
| 3 | 69–102 | 245–264 |
| 4 | 103–136 | 265–284 |
| 5 | 137–170 | 285–304 |
| 6 | 171–204 | 305–324 |

**Table 3-14. Phase overlay message subtype field definition**

| Value | Meaning |
|---|---|
| 0 | No data |
| 1 | The PO data-block contains predefined values as defined for selected GICB registers |
| 2–15 | Reserved |

## 4 Airborne Collision Avoidance System

*Introductory Note.— This chapter contains SARPs on ACAS I, ACAS II and ACAS III. The focus is especially on ACAS II which provides vertical resolution advisories (RAs) in addition to traffic advisories (TAs), and the related provisions are detailed in the following sections:*

- *4.3 GENERAL PROVISIONS RELATING TO ACAS II AND ACAS III*
- *4.4 PERFORMANCE OF THE ACAS II COLLISION AVOIDANCE LOGIC and*
- *4.5 ACAS USE OF EXTENDED SQUITTER*

*ACAS X and TCAS Version 7.1 are considered as ACAS II systems. The provisions for ACAS X compliant systems in this chapter cover ACAS Xa (a stands for active surveillance, which is its main surveillance source) and ACAS Xo (o stands for operation specific). ACAS Xa is developed for large commercial aircraft. ACAS Xo is a specific variation of ACAS X that adds special modes to ACAS Xa.*

*ACAS X is an alternative to, and interoperable with, TCAS Version 7.1 compliant systems. However, there are differences between ACAS X and TCAS Version 7.1, mainly in two areas: the collision avoidance logic and the sources of surveillance data. With these differences, technical requirements which are specific to either ACAS X or TCAS version 7.1 are identified within this CAR as "For ACAS X compliant systems" or "For TCAS 7.1 compliant systems".*

*Guidance material related to both ACAS X compliant systems and TCAS 7.1 compliant systems including similarities and differences (e.g. monitoring and training) are contained in the Airborne Collision Avoidance System (ACAS) Manual (Doc 9863).*

*It is to be noted that hybrid and extended hybrid surveillance provisions contained in section 4.5 describe functionalities which are optional for TCAS version 7.1 compliant systems. However, their use is encouraged in order to minimize the risk of ACAS RF spectrum congestion, as proper and efficient utilization of available bandwidth and capacity at 1030 MHz and 1090 MHz is a key element to ensure the safe operation of not only ACAS but also several surveillance systems such as secondary surveillance radar (SSR) and automatic dependent surveillance broadcast (ADS-B). These functionalities are included in ACAS X compliant systems.*

*Non-SI alternative units are used as permitted by DGCA CAR's. In limited cases, to ensure consistency at the level of the logic calculations, units such as ft/s, NM/s and kt/s are used.*

*For more details of TCAS Version 7.1 compliant systems, refer to the RTCA/DO-185B or EUROCAE/ED-143 specifications, i.e. equipment that incorporates the traffic alert and collision avoidance systems (TCAS) Version 7.1. For ACAS X compliant systems, refer to the RTCA/DO-385 or EUROCAE/ED-256 specifications, i.e. equipment that incorporates the airborne collision avoidance system X (ACAS X). Equipment meeting the ACAS X or TCAS Version 7.1 specifications listed above are compliant with the ACAS II requirements listed in Chapter 4. Equipment meeting the RTCA/DO-185A specifications (also known as TCAS Version 7.0) are not compliant with the ACAS II requirements listed in Chapter 4.*

### 4.1 Definitions Relating to Airborne Collision Avoidance System

**ACAS I**. An ACAS which provides information as an aid to "see and avoid" action but does not include the capability for generating resolution advisories (RAs).

**ACAS II.** An ACAS which provides vertical resolution advisories (RAs) in addition to traffic advisories (TAs).

**ACAS III.** An ACAS which provides vertical and horizontal resolution advisories (RAs) in addition to traffic advisories (TAs).

**ACAS broadcast**. A long Mode S air-air surveillance interrogation (UF = 16) with the broadcast address.

**Active RAC**. An RAC is active if it currently constrains the selection of the RA. RACs that have been received within the last six seconds and have not been explicitly cancelled are active.

**Altitude crossing RA.** A resolution advisory is altitude crossing if own ACAS aircraft is currently at least 30 m (100 ft) below or above the threat aircraft for upward or downward sense advisories, respectively.

**Climb RA.** A positive RA recommending a climb but not an increased climb.

**Closest approach.** The occurrence of minimum range between own ACAS aircraft and the intruder. Thus range at closest approach is the smallest range between the two aircraft and time of closest approach is the time at which this occurs.

**Coordination.** The process by which two ACAS-equipped aircraft select compatible resolution advisories (RAs) by the exchange of resolution advisory complements (RACs).

**Coordination interrogation.** A Mode S interrogation (uplink transmission) radiated by ACAS II or III and containing a resolution message.

**Coordination reply.** A Mode S reply (downlink transmission) acknowledging the receipt of a coordination interrogation by the Mode S transponder that is part of an ACAS II or III installation.

**Corrective RA**. A resolution advisory that advises the pilot to deviate from the current flight path.
**Cycle.** The term “cycle” used in this chapter refers to one complete pass through the sequence of functions executed by ACAS II or ACAS III, nominally once a second.

**Descend RA**. A positive RA recommending a descent but not an increased descent.

**Established track**. A track generated by ACAS air-air surveillance that is treated as the track of an actual aircraft.

**Increased rate RA**. A resolution advisory with a strength that recommends increasing the altitude rate to a value exceeding that recommended by a previous climb or descend RA.

**Intruder.** An aircraft for which ACAS has an established track.

**Own aircraft**. The aircraft fitted with the ACAS that is the subject of the discourse, which ACAS is to protect against possible collisions, and which may enter a manoeuvre in response to an ACAS indication.

**Positive RA**. A resolution advisory that advises the pilot either to climb or to descend (applies to ACAS II).

**Potential threat**. An intruder deserving special attention either because of its close proximity to own aircraft or because successive range and altitude measurements indicate that it could be on a collision or near-collision course with own aircraft. The warning time provided against a potential threat is sufficiently small that traffic advisory (TA) is justified but not so small that a resolution advisory (RA) would be justified.

**Preventive RA**. A resolution advisory that advises the pilot to avoid certain deviations from the current flight path but does not require any change in the current flight path.

**RA sense**. The sense of an ACAS II RA is “upward” if it requires climb or limitation of descent rate and “downward” if it requires descent or limitation of climb rate. It can be both upward and downward simultaneously if it requires limitation of the vertical rate to a specified range.

**Resolution advisory (RA).** An indication given to the flight crew recommending:

a) a manoeuvre intended to provide separation from all threats; or

b) a manoeuvre restriction intended to maintain existing separation.

**Resolution advisory complement (RAC).** Information provided by one ACAS to another via a Mode S interrogation in order to ensure complementary manoeuvres by restricting the choice of manoeuvres available to the ACAS receiving the RAC.

**Resolution advisory complements record (RAC record).** A composite of all currently active vertical RACs (VRCs) and horizontal RACs (HRCs) that have been received by ACAS. This information is provided by one ACAS to another ACAS or to a Mode S ground station via a Mode S reply.

**Resolution advisory strength.** The magnitude of the manoeuvre indicated by the RA. An RA may take on several successive strengths before being cancelled. Once a new RA strength is issued, the previous one automatically becomes void.

**Resolution message**. The message containing the resolution advisory complement (RAC).

**Reversed sense RA**. A resolution advisory that has had its sense reversed.

**Sensitivity level (S).** An integer defining a set of parameters used by the traffic advisory (TA) and collision avoidance algorithms to control the warning time provided by the potential threat and threat detection logic, as well as the values of parameters relevant to the RA selection logic.

*Note.— For TA and RA selection, sensitivity level is not used in ACAS X compliant systems.*

**Threat**. An intruder deserving special attention either because of its close proximity to own aircraft or because successive range and altitude measurements indicate that it could be on a collision or near-collision course with own aircraft. The warning time provided against a threat is sufficiently small that an RA is justified.

**Track**. A sequence of measurements representing positions that could reasonably have been occupied by an aircraft.

**Traffic advisory (TA).** An indication given to the flight crew that a certain intruder is a potential threat.

**Vertical speed limit (VSL) RA:** A resolution advisory advising the pilot to avoid a given range of altitude rates, A VSL RA can be either corrective or preventive.

**Warning time**. The time interval between potential threat or threat detection and closest approach when neither aircraft accelerates.

## 4.2 ACAS I General Provisions and Characteristics

**4.2.1 Functional requirements.** ACAS I shall perform the following functions:

a) surveillance of nearby SSR transponder-equipped aircraft; and

b) provide indications to the flight crew identifying the approximate position of nearby aircraft as an aid to visual acquisition.

*Note.— ACAS I is intended to operate using Mode A/C interrogations only. Furthermore, it does not coordinate with other ACAS. Therefore, a Mode S transponder is not required as a part of an ACAS I installation.*

**4.2.2 Signal format**. The RF characteristics of all ACAS I signals shall conform to the provisions of Chapter 3, 3.1.1.1 through 3.1.1.6 and 3.1.2.1 through 3.1.2.4.

**4.2.3 Interference control**

**4.2.3.4 Maximum radiated RF power**. The effective radiated power of an ACAS I transmission at 0 degree elevation relative to the longitudinal axis of the aircraft shall not exceed 24dBW.

**4.2.3.5 Unwanted radiated power.** When ACAS I is not transmitting an interrogation, the effective radiated power in any direction shall not exceed -70dBm.

**4.2.3.6 Interference limiting**. Each ACAS I interrogator shall control its interrogation rate or power or both in all SSR modes to minimize interference effects (4.2.3.3.3 and 4.2.3.3.4).

**4.2.3.3.1 Determination of own transponder reply rate**. ACAS I shall monitor the rate that own transponder replies to interrogations to ensure that the provisions in 4.2.3.3.3 are met.

**4.2.3.3.2 Determination of the number of ACAS II and ACAS III interrogators.** ACAS I shall count the number of ACAS II and ACAS III interrogators in the vicinity to ensure that the provisions in 4.2.3.3.3 or 4.2.3.3.4 are met. This count shall be obtained by monitoring ACAS broadcasts (UF = 16), (4.3.7.1.2.4) and shall be updated as the number of distinct ACAS aircraft addresses received within the previous 20-s period at a nominal frequency of at least 1 Hz.

4.2.3.3.3 *Mode A/C ACAS I interference limits.* The interrogator power shall not exceed the following limits:

| $n_a$ | *Upper limit for* $\{\sum_{k=1}^{k_1} P_a(k)\}$ | |
|---|---|---|
| | *If* $f_r \leq 240$ | *If* $f_r > 240$ |
| 0 | 250 | 118 |
| 1 | 250 | 113 |
| 2 | 250 | 108 |
| 3 | 250 | 103 |
| 4 | 250 | 98 |
| 5 | 250 | 94 |
| 6 | 250 | 89 |
| 7 | 250 | 84 |
| 8 | 250 | 79 |
| 9 | 250 | 74 |
| 10 | 245 | 70 |
| 11 | 228 | 65 |
| 12 | 210 | 60 |
| 13 | 193 | 55 |
| 14 | 175 | 50 |
| 15 | 158 | 45 |
| 16 | 144 | 41 |
| 17 | 126 | 36 |
| 18 | 109 | 31 |
| 19 | 91 | 26 |
| 20 | 74 | 21 |
| 21 | 60 | 17 |
| ≥22 | 42 | 12 |

*where:*

$n_a$ = number of operating ACAS II and ACAS III equipped aircraft near own (based on ACAS broadcasts received with a transponder receiver threshold of -74dBm);

{} = average value of the expression within the brackets over last 8 interrogation cycles;

$P_a(k)$ = peak power radiated from the antenna in all directions of the pulse having the largest amplitude in the group of pulses comprising a single interrogation during the kth Mode A/C interrogation in a 1 s interrogation cycle, W;

k = index number for Mode A/C interrogations, k = 1, 2,...,kt;

$k_t$ = number of Mode A/C interrogations transmitted in a 1 s interrogation cycle;

$f_r$ = Mode A/C reply rate of own transponder.

**4.2.3.3.4 Mode S ACAS I interference limits**. An ACAS I that uses Mode S interrogations shall not cause greater interference effects than an ACAS I using Mode A/C interrogations only.

## 4.3 **General Provisions** Relating to ACAS II AND ACAS III

*Note 1.— The acronym ACAS is used in this section to indicate either ACAS II or ACAS III.*

*Note 2.— Carriage requirements for ACAS equipment are addressed in CAR Section 2 Series 'O'.*

*Note 3.— The term "equipped threat" is used in this section to indicate a threat fitted with ACAS II or ACAS III.*

### 4.3.1 Functional requirements

**4.3.1.1 ACAS functions**. ACAS shall perform the following functions:

a) surveillance;

b) generation of TAs;

c) threat detection;

d) generation of RAs;

e) coordination; and

f) communication with ground stations.

The equipment shall execute functions b) through e) on each cycle of operation.

**4.3.1.1.1** The duration of a cycle shall not exceed 1.2 s.

### 4.3.2 Surveillance performance requirements

**4.3.2.1 General surveillance requirements**. ACAS shall interrogate SSR Mode A/C and Mode S transponders in other aircraft and detect the transponder replies. ACAS shall measure the range and relative bearing of responding aircraft. For ACAS X compliant systems, in addition to information from other sources described above, ACAS shall be able to receive other aircraft's ADS-B position, velocity and status information Using these measurements and information conveyed by transponder replies and for ACAS X compliant systems also by ADS-B messages, ACAS shall estimate the relative positions of each responding aircraft. ACAS shall include provisions for achieving such position determination in the presence of ground reflections, interference and variations in signal strength.

**4.3.2.1.1 Track establishment probability**. ACAS shall generate an established track, with at least a 0.90 probability that the track is established 30 s before closest approach, on aircraft equipped with transponders when all of the following conditions are satisfied:

a) the elevation angles of these aircraft are within ±10 degrees relative to the ACAS aircraft pitch plane;

b) the magnitudes of these aircraft's rates of change of altitude are less than or equal

to 51 m/s (10 000ft/min);

c) the transponders and antennas of these aircraft meet the Standards of Chapter 3, 3.1.1 and 3.1.2;

d) the closing speeds and directions of these aircraft, the local density of SSR transponder-equipped aircraft and the number of other ACAS interrogators in the vicinity (as determined by monitoring ACAS broadcasts, 4.3.7.1.2.4) satisfy the conditions specified in Table 4-1;and

e) the minimum slant range is equal to or greater than 300 m (1000ft).

**Table 4-1**

| *Conditions* | | | | | | | | | *Performance* |
|---|---|---|---|---|---|---|---|---|---|
| *Quadrant* | | | | | | | | | |
| *Forward* | | *Side* | | *Back* | | *Maximum traffic density* | | *Maximum number of other ACAS within 56 km (30 NM)* | |
| *Maximum closing speed* | | | | | | | | | |
| *m/s* | *kt* | *m/s* | *kt* | *m/s* | *kt* | *aircraft/ km2* | *aircraft/ NM2* | | *Probability of success* |
| 260 | 500 | 150 | 300 | 93 | 180 | 0.087 | 0.30 | 30 | 0.90 |
| 620 | 1 200 | 390 | 750 | 220 | 430 | 0.017 | 0.06 | 30 | 0.90 |

**4.3.2.1.1.1** ACAS shall continue to provide surveillance with no abrupt degradation in track establishment probability as any one of the condition bounds defined in 4.3.2.1.1 is exceeded.

**4.3.2..1.1.2** ACAS shall not track Mode S aircraft that report that they are on the ground.

**4.3.2.1.1.3** ACAS should achieve the required tracking performance when the average SSR Mode A/C asynchronous reply rate from transponders in the vicinity of the ACAS aircraft is 240 replies per second and when the peak interrogation rate received by the individual transponders under surveillance is 500 per second.

**4.3.2.1.2** **False track probability**. The probability that an established Mode A/C track does not correspond in range and altitude, if reported, to an actual aircraft shall be less than 1.2 per cent . For an established Mode S track this probability shall be less than 0.1 per cent . These limits shall not be exceeded in any traffic environment.

**4.3.2.1.3** **Range and Bearing Accuracy**:

**4.3.2.1.3.1** Range shall be measured with a resolution of 14.5 m (1/128 NM) or better. **4.3.2.1.3.2**

The errors in the relative bearings of the estimated positions of intruders should not exceed 10 degrees rms.

**4.3.2.2** **Interference Control**

**4.3.2.2.1** **Maximum radiated RF power**. The effective radiated power of an ACAS transmission at 0 degree elevation relative to the longitudinal axis of the aircraft shall

not exceed 27dBW.

**4.3.2.2.1.1 Unwanted radiated power**. When ACAS is not transmitting an interrogation, the effective radiated power in any direction shall not exceed -70dBm.

**4.3.2.2.2 Interference limiting**. Each ACAS interrogator operating below a pressure altitude of 5 490 m (18 000 ft) shall control its interrogation rate or power or both so as to conform with specific inequalities (4.3.2.2.2.2).

**4.3.2.2.2.1 Determination of the number of other ACAS**. ACAS shall count the number of other ACAS II and III interrogators in the vicinity to ensure that the interference limits are met. This count shall be obtained by monitoring ACAS broadcasts (UF = 16), (4.3.7.1.2.4). Each ACAS shall monitor such broadcast interrogations to determine the number of other ACAS within detection range.

**4.3.2.2.2.2. ACAS interference limiting inequalities**. ACAS shall adjust its interrogation rate and interrogation power such that the following three inequalities remain true, except as provided in4.3.2.2.2.2.1.

$$\{\sum_{i=1}^{i_1}\left[\frac{p(i)}{250}\right]^{\alpha}\} < minimum\left[\frac{280}{1+n_a},\frac{11}{\alpha^2}\right] \qquad (1)$$

$$\{\sum_{i=1}^{i_1} m(i)\} < 0.01 \qquad (2)$$

$$\{\frac{1}{B}\sum_{k=1}^{k_1}\frac{P_a(k)}{250}\} < minimum\left[\frac{80}{1+n_a},3\right] \qquad (3)$$

The variables in these inequalities shall be defined as follows:

$i_t$ = number of interrogations (Mode A/C and Mode S) transmitted in a 1 s interrogation cycle; This shall include all Mode S interrogations used by the ACAS functions, including those in addition to UF = 0 and UF = 19 interrogations, except as provided in 4.3.2.2.2.2.1;

*Note.— UF = 19 interrogations are included in it as specified in 3.1.2.8.9.3.*

I = index number for Mode A/C and Mode S interrogations, i = 1, 2,...,it

α = the minimum of 1 calculated as 1/4 [nb/nc] subject to the special conditions given below and 2 calculated as Log10 [na/nb] / Log10 25, where nb and nc are defined as the number of operating ACAS II and ACAS III equipped aircraft (airborne or on the ground) within 11.2km (6NM) and 5.6 km (3 NM) respectively, of own ACAS (based on ACAS surveillance). ACAS aircraft operating on the ground or at or below a radio altitude of 610 m (2 000 ft) AGL shall include both airborne and on-ground ACAS II and ACAS

III aircraft in the value for nb and nc. Otherwise, ACAS shall include only airborne ACAS II and ACAS III aircraft in the value for nb and nc. The values of α, $\alpha_1$ and $\alpha_2$ are further constrained to a minimum of 0.5 and a maximum of 1.0.

In addition;

IF [($n_b$< 1) OR ($n_b$< 4 AND $n_c$< 2 AND $n_a$> 25)] THEN 1 = 1.0, IF

[($n_c$> 2) AND ($n_b$> 2 $n_c$ ) AND ($n_a$< 40)] THEN 1 = 0.5;

p(i) = peak power radiated from the antenna in all directions of the pulse having the largest amplitude in the group of pulses comprising a single interrogation during the ith interrogation in a 1 s interrogation cycle,W;

m(i) = duration of the mutual suppression interval for own transponder associated with the ith interrogation in a 1 s interrogation cycles;

B = beam sharpening factor (ratio of 3 dB beam width to beamwidth resulting from interrogation side-lobe suppression). For ACAS interrogators that employ transmitter side-lobe suppression (SLS), the appropriate beamwidth shall be the extent in azimuth angle of the Mode A/C replies from one transponder as limited by SLS, averaged over the transponder population;

{} see 4.2.3.3.3

$P_a(k)$ see 4.2.3.3.3
k see 4.2.3.3.3
$k_t$ see 4.2.3.3.3
$n_a$ see 4.2.3.3.3

**4.3.2.2.2.2.1** **Transmissions during RAs**. All air-to-air coordination interrogations shall be transmitted at full power and these interrogations shall be excluded from the summations of Mode S interrogations in the left-hand terms of inequalities(1) and (2) in 4.3.2.2.2.2 for the duration of the RA.

**4.3.2.2.2.2.2** **Transmissions from ACAS units on the ground**. Whenever the ACAS aircraft indicates that it is on the ground, ACAS interrogations shall be limited by setting the number of other ACAS II and III aircraft (na) count in the interference limiting inequalities to a value that is three times the value obtained based on ACAS broadcasts received with a transponder receiver threshold of -74 dBm. Whenever Mode A/C interrogation power is reduced because of interference limiting, the Mode A/C interrogation power in the forward beam shall be reduced first until the forward sequence matches the right and left sequences. The forward, right and left interrogation powers shall then sequentially be reduced until they match the rear interrogation power. Further reduction of Mode A/C power shall be accomplished by sequentially reducing the forward, side and rear interrogation powers.

**4.3.2.2.2.2.3** **Transmissions from ACAS units above 5 490 m (18 000 ft) altitude**. Each ACAS interrogator operating above a pressure altitude of 5 490 m (18 000 ft) shall control

its interrogation rate or power or both such that inequalities (1) and (3) in 4.3.2.2.2.2 remain true when na and a are equal to 1, except as provided in4.3.2.2.2.2.1.

### 4.3.3 Traffic advisories (TAs)

**4.3.3.1 TA function**. ACAS shall provide TAs to alert the flight crew to potential threats. Such TAs shall be accompanied by an indication of the approximate relative position of potential threats to facilitate visual acquisition.

**4.3.3.1.1** ***Display of potential threats.*** If potential threats are shown on a traffic display, they shall be displayed in amber or yellow.

*Note 1.— These colours are generally considered suitable for indicating a cautionary condition.*

*Note 2.—Additional information assisting in the visual acquisition such as vertical trend and relative altitude may be displayed as well.*

*Note 3.— Traffic situational awareness is improved when tracks can be supplemented by display of heading information (e.g. as extracted from received ADS-B messages).*

### 4.3.3.2 Proximate Traffic Display

**4.3.3.2.1** While any RA and/or TA are displayed, proximate traffic within 11 km (6 NM) range and, if altitude reporting, ±370 m (1 200 ft) altitude should be displayed. This proximate traffic should be distinguished (e.g. by colour or symbol type) from threats and potential threats, which should be more prominently displayed.

**4.3.3.2.2** While any RA and/or TA are displayed, visual acquisition of the threats and/or potential threat should not be adversely affected by the display of proximate traffic or other data unrelated to collision avoidance.

**4.3.3.3 TAs as RA precursors**. The criteria for TAs shall be such that they are satisfied before those for an RA.

*Note. — Ideally, RAs would always be preceded by a TA but this is not always possible, e.g. the RA criteria might be already satisfied when a track is first established, or a sudden and sharp manoeuvre by the intruder could cause the TA lead time to be less than a cycle.*

**4.3.3.3.1 TA warning time**.

**4.3.3.3.1.1** For TCAS Version 7.1 compliant systems, the nominal TA warning time for intruders reporting altitude shall not be greater than (T+20 s) where T is the nominal warning time for the generation of the resolution advisory.

**4.3.3.3.1.2** For ACAS X compliant systems, the TA warning time shall be sufficient to allow the flight crew to take actions described in PANS-OPS, Volume III and prepare for a potential resolution advisory.

Note.— The nominal TA warning time is 20 s or less before the generation of the resolution advisory.

### 4.3.4 Threat detection

**4.3.4.1 Declaration of threat**. ACAS shall evaluate appropriate characteristics of each intruder to determine whether or not it is a threat.

**4.3.4.1.1 Intruder characteristics**. As a minimum, the characteristics of an intruder that are used to identify a threat shall include:

a) Tracked altitude;

b) tracked rate of change of altitude;

c) tracked slant range;

d) tracked rate of change of slant range; and

e) for TCAS Version 7.1 compliant systems: sensitivity level of intruder's ACAS, Si.

For an intruder not equipped with ACAS II or ACAS III, Si shall be set to 1.

**4.3.4.1.2 Own aircraft characteristics**. As a minimum, the characteristics of own aircraft that are used to identify a threat shall include:

a) altitude;

b) rate of change of altitude; and

c) sensitivity level of own ACAS(4.3.4.3).

**4.3.4.2 Sensitivity levels**. ACAS shall be capable of operating at any of a number of sensitivity levels. These shall include:

a) S = 1, a "standby" mode in which the interrogation of other aircraft and all advisories are inhibited;
b) S = 2, a "TA only" mode in which RAs are inhibited;
c) for TCAS Version 7.1 compliant systems: S = 3-7, further levels that enable the issue of RAs that provide the warning times indicated in Table 4-2 as well as TAs; and
d) for ACAS X compliant systems: S = 3, a "TA/RA" mode in which RAs and TAs can be issued.

**4.3.4.3 Selection of own sensitivity level (So).** The selection of own ACAS sensitivity level shall be determined by sensitivity level control (SLC) commands which shall be accepted from a number of sources as follows:

a) SLC command generated automatically by ACAS based on altitude band or other external factors;

b) SLC command from pilot input; and

c) for TCAS Version 7.1 compliant systems: SLC command from Mode S ground stations.

Note. — ACAS X compliant systems acknowledge SLC commands from ground stations so that the ground stations do not need to be modified for these commands. However, the sensitivity level value is not used in ACAS X compliant systems.

**Table 4-2**

For TCAS Version 7.1 compliant systems:

| *Sensitivity level* | *2* | *3* | *4* | *5* | *6* | *7* |
|---|---|---|---|---|---|---|
| Nominal warning time | no RAs | 15s | 20s | 25s | 30s | 35s |

**4.3.4.3.1 Permitted SLC command codes**. As a minimum, the acceptable SLC command codes shall include:

| | Coding |
|---|---|
| for SLC based on altitude band | 2-7 (for TCAS Version 7.1 compliant systems) |
| | 2-3 (for ACAS X compliant systems) |
| for SLC from pilot input | 0,1,2 |
| for SLC from Mode S ground stations | 0,2-6 (for TCAS Version 7.1 compliant systems) |

**4.3.4.3.2 Altitude-band SLC command**. Where ACAS selects an SLC command based on altitude, hysteresis shall be applied to the nominal altitude thresholds at which SLC command value changes are required as follows: for a climbing ACAS aircraft the SLC command shall be increased at the appropriate altitude threshold plus the hysteresis value; for a descending ACAS aircraft the SLC command shall be decreased at the appropriate altitude threshold minus the hysteresis value.

**4.3.4.3.3 Pilot SLC command**. For the SLC command set by the pilot the value 0 shall indicate the selection of the “automatic” mode for which the sensitivity level selection shall be based on the other commands.

**4.3.4.3.4 Mode S ground station SLC command**.

**4.3.4.3.4.1 For TCAS Version 7.1 compliant systems:** For SLC commands transmitted via Mode S ground stations (4.3.8.4.2.1.1), the value 0 shall indicate that the station concerned is not issuing an SLC command and that sensitivity level selection shall be based on the other commands, including non-0 commands from other Mode S ground stations. ACAS shall not process an uplinked SLC value of 1.

**4.3.4.3.4.2 For ACAS X compliant systems:** ACAS shall receive any SLC commands from Mode S ground stations but shall not use their sensitivity level values

**4.3.4.3.4.3 ATS selection of SLC command code**. ATS authorities shall ensure that procedures are in place to inform pilots of any ATS selected SLC command code other than 0(4.3.4.3.1).

**4.3.4.3.5 Selection rule**. Own ACAS sensitivity level shall be set to the smallest non-0 SLC command received from any of the sources listed in 4.3.4.3.

**4.3.4.4 Selection of parameter values for RA generation**. For TCAS Version 7.1 compliant systems: When the sensitivity level of own ACAS is 3 or greater, the parameter values used for RA generation that depend on sensitivity level shall be based on the greater of the sensitivity level of own ACAS, So, and the sensitivity level of the intruder's ACAS, Si.

**4.3.4.5 Selection of parameter values for TA generation**. For TCAS Version 7.1 compliant systems: The parameter values used for TA generation that depend on sensitivity level shall be selected on the same basis as those for RAs (4.3.4.4) except when an SLC command with a value of 2 ("TA only" mode) has been received from either the pilot or a Mode S ground station. In this case, the parameter values for TA generation shall retain the values they would have had in the absence of the SLC command from the pilot or Mode S ground station.

**4.3.4.6 Validation of ADS-B tracks for RA generation.** For ACAS X compliant systems: If ADS-B tracks fail validation via active interrogation and reply, ACAS shall revert back to using active surveillance for threat resolution logic

*Note.— Only validated ADS-B is used in the generation of RAs.*

**4.3.4.7 Designation of aircraft for do not alert (DNA).** For ACAS X compliant systems with Xo functionality: If an intruder aircraft is designated as do not alert (DNA), no alerts for the intruder aircraft shall be issued to the flight crew of the own aircraft.

*Note. — ACAS Xo provides additional modes with modified threat detection criteria in respect of designated intruders. For more details on ACAS Xo, refer to RTCA/DO-385 or EUROCAE/ED-256.*

### 4.3.5 Resolution advisories (RAs)

**4.3.5.1 RA generation**. For all threats, ACAS shall generate an RA except where it is not possible to select an RA that can be predicted to provide adequate separation either because of uncertainty in the diagnosis of the intruder's flight path or because there is a high risk that a manoeuvre by the threat will negate the RA.

**4.3.5.1.1** *Display of threats*. If threats are shown on a traffic display, they shall be displayed in red.

*Note- This colour is generally considered suitable for indicating a warning condition.*

**4.3.5.1.2 RA cancellation**.

**4.3.5.1.2.1** For TCAS 7.1 compliant systems: Once an RA has been generated against a threat or threats it shall be maintained or modified until tests that are less stringent than those for threat detection indicate on two consecutive cycles that the RA may be cancelled, at which time it shall be cancelled.

**4.3.5.1.2.2** For ACAS X compliant systems: Once an RA has been generated against a threat or threats it shall be maintained until the intruder or intruders of the RA cease to be a threat

**4.3.5.2 RA selection**. ACAS shall generate the RA that is predicted to provide adequate separation from all threats and that has the least effect on the current flight path of the ACAS aircraft consistent with the other provisions in this chapter.

**4.3.5.3 RA effectiveness**. The RA shall not recommend or continue to recommend a manoeuvre or manoeuvre restriction that, considering the range of probable threat trajectories, is more likely to reduce separation than increase it, subject to the provisions in 4.3.5.5.1.1 and 4.3.5.6.

**4.3.5.3.1** New ACAS installations after 1 January 2014 shall monitor own aircraft's vertical rate to verify compliance with the RA sense. If non-compliance is detected, ACAS shall stop assuming compliance, and instead shall assume the observed vertical rate.

*Note 1.— This overcomes the retention of an RA sense that would work only if followed. The revised vertical rate assumption is more likely to allow the logic to select the opposite sense when it is consistent with the non-complying aircraft's vertical rate.*

*Note 2.— Equipment complying with RTCA/DO-185 or DO-185A standards (also known as TCAS Version 6.04A or TCAS Version 7.0) do not comply with this requirement.*

*Note 3.— Compliance with this requirement can be achieved through the implementation of traffic alert and collision avoidance system (TCAS) Version 7.1 as specified in RTCA/DO-185B, EUROCAE/ED-143 or airborne collision avoidance system X (ACAS Xa and Xo) as specified in RTCA/DO-385 or EUROCAE/ED-256.*

***4.3.5.3.2** - All ACAS should be compliant with the requirement in4.3.5.3.1.*

**4.3.5.3.3** After 1 January 2017, all ACAS units shall comply with the requirements stated in 4.3.5.3.1.

**4.3.5.4 Aircraft capability**. The RA generated by ACAS shall be consistent with the performance capability of the aircraft.

**4.3.5.4.1 Proximity to the ground.** Descend RAs shall not be generated or maintained when own aircraft is below 300 m (1 000 ft) AGL.

**4.3.5.4.2** ACAS shall operate in TA only mode when own aircraft is below 300 m (1 000 ft) AGL nominal value with hysteresis applied.

**4.3.5.5 Reversals of sense.** ACAS shall not reverse the sense of an RA from one cycle to the next, except as permitted in 4.3.5.5.1 to ensure coordination or when the predicted separation at closest approach for the existing sense is inadequate.

**4.3.5.5.1 Sense reversals against equipped threats**. If an RAC received from an equipped threat is incompatible with the current RA sense, ACAS shall modify the RA sense to conform with the received RAC if own aircraft address is higher in value than that of the threat.

**4.3.5.5.1.1** ACAS shall not modify an RA sense in a way that makes it incompatible with an RAC received from an equipped threat if own aircraft address is higher in value than that of the threat.

**4.3.5.5.2** Sense reversals due to inadequate predicted separation. ACAS shall initiate not more than one reversal per threat per encounter due to inadequate predicted separation.

Note 1.— For TCAS Version 7.1 compliant systems: The aircraft with the lower 24-bit aircraft address can initiate this type of reversal at any time during the encounter; the aircraft with the higher 24-bit aircraft address performs this type of reversal only to comply with an RAC received from the aircraft with a lower 24-bit aircraft address.

Note 2.— For ACAS X compliant systems: In a coordinated encounter as described in section 4.3.6.1, the aircraft with the lower 24-bit aircraft address can initiate this type of reversal at any time during the encounter; the aircraft with the higher 24-bit aircraft address can initiate this type of reversal only before it has received an RAC from the threat or after receiving cancellation of any remaining RAC from the threat.

**4.3.5.6 RA strength retention**. Subject to the requirement that a descend RA is not generated at low altitude (4.3.5.4.1), an RA shall not be modified if the time to closest approach is too short to achieve a significant response or if the threat is diverging in range.

**4.3.5.7 Weakening an RA**. An RA shall not be weakened if it is likely that it would subsequently need to be strengthened.

**4.3.5.8 ACAS-equipped threats**. The RA shall be compatible with all the RACs transmitted to threats (4.3.6.1.3). If an RAC is received from a threat before own ACAS generates an RAC for that threat, the RA generated shall be compatible with the RAC received unless such an RA is more likely to reduce separation than increase it and own aircraft address is lower in value than that of the threat.

**4.3.5.9 Encoding of ARA subfield**. On each cycle of an RA, the RA sense, strength and attributes shall be encoded in the active RA (ARA) subfield (4.3.8.4.2.2.1.1).

**4.3.5.10 System response time**. The system delay from receipt of the relevant SSR reply to presentation of an RA sense and strength to the pilot shall be as short as possible and shall not exceed 1.5s.

### 4.3.6 Coordination and communication

#### 4.3.6.1 Provisions For Coordination with ACAS-Equipped Threats

*Note 1.— The provisions in this section apply to aircraft that coordinate with ACAS equipped aircraft via 1 030/1 090 MHz discrete Mode S interrogations/replies.*

*Note 2.— ACAS equipment not capable of utilizing 1 030/1 090 MHz discrete Mode S interrogations/replies and that will use ADS-B to convey the applicable coordination scheme is under development. ACAS X-compliant systems incorporate the ability to coordinate with threats using such ACAS equipment. For more details, refer to Section 2.2.3.9.3.1 of RTCA/DO-385 or EUROCAE/ED-256.*

**4.3.6.1.1 Multi-aircraft coordination.** In a multi-aircraft situation, ACAS shall coordinate with each equipped threat individually.

**4.3.6.1.2 Data protection during coordination.** ACAS shall prevent simultaneous access to stored data by concurrent processes, in particular, during resolution message processing.

**4.3.6.1.3 Coordination interrogation.** Each cycle ACAS shall transmit a coordination interrogation to each equipped threat, unless generation of an RA is delayed because it is not possible to select an RA that can be predicted to provide adequate separation (4.3.5.1).There solution message transmitted to a threat shall include an RAC selected for that threat. If an RAC has been received from the threat before ACAS selects an RAC for that threat, the selected RAC shall be compatible with the received RAC unless no more than three cycles have elapsed since the RAC was received, the RAC is altitude-crossing, and own aircraft address is lower in value than that of the threat in which case ACAS shall select its RA independently. If an RAC received from an equipped threat is incompatible with the RAC own ACAS has selected for that threat, ACAS shall modify the selected RAC to be compatible with the received RAC if own aircraft address is higher in value than that of the threat

**4.3.6.1.3.1 Coordination termination.** Within the cycle during which an intruder ceases to be a reason for maintaining the RA, ACAS shall send a resolution message to that intruder by means of a coordination interrogation. The resolution message shall include the cancellation code for the last RAC sent to that intruder while it was a reason for maintaining the RA.

**4.3.6.1.3.2** ACAS coordination interrogations shall be transmitted until a coordination reply is received from the threat, up to a maximum of not less than six and not more than twelve attempts. The successive interrogations shall be nominally equally spaced over a period of 100 ±5 ms. If the maximum number of attempts is made and no reply is received, ACAS shall continue its regular processing sequence.

**4.3.6.1.3.3** ACAS shall provide parity protection (4.3.8.4.2.3.2.6 and 4.3.8.4.2.3.2.7) for all fields in the coordination interrogation that convey RAC information.

**4.3.6.1.3.4** Whenever own ACAS reverses its sense against an equipped threat, the resolution message that is sent on the current and subsequent cycles to that threat shall contain

both the newly selected RAC and the cancellation code for the RAC sent before the reversal.

**4.3.6.1.3.5** When a vertical RA is selected, the vertical RAC (VRC) (4.3.8.4.2.3.2.2) that own ACAS includes in a resolution message to the threat shall be as follows:

a) “do not pass above” when the RA is intended to provide separation above the threat;

b) “do not pass below” when the RA is intended to provide separation below the threat.

**4.3.6.1.4 Resolution message processing.** Resolution messages shall be processed in the order in which they are received and with delay limited to that required to prevent possible concurrent access to stored data and delays due to the processing of previously received resolution messages. Resolution messages that are being delayed shall be temporarily queued to prevent possible loss of messages. Processing a resolution message shall include decoding the message and updating the appropriate data structures with the information extracted from the message.

*Note 1.— For TCAS Version 7.1 compliant systems: According to 4.3.6.1.2, resolution message processing must not access any data whose usage is not protected by the coordination lock state.*

*Note 2.— For ACAS X compliant systems: Simultaneous data access may exist because incoming resolution messages are received asynchronously to ACAS X processing, effectively interrupting this processing. Simultaneous reading and writing by concurrent processes are to be prevented.*

**4.3.6.1.4.1** An RAC or an RAC cancellation received from another ACAS shall be rejected if the encoded sense bits indicate the existence of a parity error or if undefined value(s) are detected in the resolution message. An RAC or an RAC cancellation without parity errors and without undefined resolution message values shall be considered valid.

**4.3.6.1.4.2 RAC storage**. A valid RAC received from another ACAS shall be stored or shall be used to update the previously stored RAC corresponding to that ACAS. A valid RAC cancellation shall cause the previously stored RAC to be deleted. A stored RAC that has not been updated for an interval of 6 s shall be deleted.

**4.3.6.1.4.3 RAC record update**. A valid RAC or RAC cancellation received from another ACAS shall be used to update the RAC record. If a bit in the RAC record has not been refreshed for an interval of 6 s by any threat, that bit shall be set to 0.

### 4.3.6.2 Provisions for ACAS Communication with Ground Stations

**4.3.6.2.1** Air-initiated downlink of ACAS RAs. When an ACAS RA exists, ACAS shall:

a) transfer to its Mode S transponder an RA report for transmission to the

ground in a Comm-B reply (4.3.11.4.1);and

b) transmit periodic RA broadcasts(4.3.7.3.2).

**4.3.6.2.2 Sensitivity level control (SLC) command**. For TCAS Version 7.1 compliant systems: ACAS shall store SLC commands from Mode S ground stations. An SLC command received from a Mode S ground station shall remain effective until replaced by an SLC command from the same ground station as indicated by the site number contained in the IIS subfield of the interrogation. If an existing stored command from a Mode S ground station is not refreshed within 4 minutes, or if the SLC command received has the value 15 (4.3.8.4.2.1.1), the stored SLC command for that Mode S ground station shall be set to 0.

*Note.— ACAS X compliant systems do not use the sensitivity level value obtained from an SLC command to modify the sensitivity level value of own aircraft.*

### 4.3.6.3 Provisions For Data Transfer Between ACAS And Its Mode S Transponder

#### 4.3.6.3.1 Data transfer from ACAS to its Mode S transponder:

a) ACAS shall transfer RA information to its Mode S transponder for transmission in an RA report (4.3.8.4.2.2.1) and in a coordination reply(4.3.8.4.2.4.2);
b) ACAS shall transfer current sensitivity level to its Mode S transponder for transmission in a sensitivity level report (4.3.8.4.2.5); and

c) ACAS shall transfer capability information to its Mode S transponder for transmission in a data link capability report (4.3.8.4.2.2.2).

*Note.— For ACAS X compliant systems: ACAS will not transfer a sensitivity level value greater than 3 as part of the capability information to its Mode S transponder.*

#### 4.3.6.3.2 Data transfer from Mode S transponder to its ACAS:

a) ACAS shall receive from its Mode S transponder sensitivity level control commands (4.3.8.4.2.1.1) transmitted by Mode S ground stations;

*Note.— For ACAS X compliant systems: It is necessary to receive SLC commands from the transponder to be compliant with the interface protocols between the Mode S transponder and the ACAS unit; however, the sensitivity level values are not used (refer to 4.3.4.3.4).*

b) ACAS shall receive from its Mode S transponder ACAS broadcast messages (4.3.8.4.2.3.3) transmitted by other ACAS; and

c) ACAS shall receive from its Mode S transponder resolution messages (4.3.8.4.2.3.2) transmitted by other ACAS for air-air coordination purposes.

### 4.3.7 ACAS protocols

**4.3.7.1 Surveillance Protocols**

**4.3.7.1.1 Surveillance of Mode A/C transponders.** ACAS shall use the Mode C-only all-call

**4.3.7.1.1.1** ACAS shall use the Mode C-only all-call interrogation (3.1.2.1.5.1.2) for surveillance of aircraft equipped with Mode A/C transponders.

**4.3.7.1.1.2** Using a sequence of interrogations with increasing power, surveillance interrogations shall be preceded by an $S_1$-pulse (3.1.1.7.4.3) to reduce interference and improve Mode A/C target detection.

**4.3.7.1.2 Surveillance of Mode S Transponders**

**4.3.7.1.2.1 Detection**. ACAS shall monitor 1 090 MHz for Mode S acquisition squitters (DF = 11). ACAS shall detect the presence and determine the address of Mode S-equipped aircraft using their Mode S acquisition squitters (DF=11) or extended squitters (DF = 17).

**4.3.7.1.2.2 Surveillance interrogations**. On first receipt of a 24-bit aircraft address from an aircraft that is determined to be within the reliable surveillance range of ACAS based on reception reliability and that is within an altitude band 3 050 m (10 000 ft) above and below own aircraft, ACAS shall transmit a short air-air interrogation (UF = 0) for range acquisition. Surveillance interrogations shall be transmitted at least once every five cycles when this altitude condition is satisfied. Surveillance interrogations shall be transmitted each cycle if the range of the detected aircraft is less than 5.6 km (3 NM) or the calculated time to closest approach is less than 60 s, assuming that both the detected and own aircraft proceed from their current positions with unaccelerated motion and that the range at closest approach equals 5.6 km (3 NM). Surveillance interrogations shall be suspended for a period of five cycles if:

a) a reply was successfully received; and

b) own aircraft and intruder aircraft are operating below a pressure altitude of 5 490 m (18 000 ft);and

c) the range of the detected aircraft is greater than 5.6 km (3 NM) and the calculated time to closest approach exceeds 60 seconds, assuming that both the detected and own aircraft proceed from their current positions with unaccelerated motion and that the range at closest approach equals 5.6 km (3NM).

**4.3.7.1.2.2.1 Range acquisition interrogations**. ACAS shall use the short air-air surveillance format (UF=0) for range acquisition. ACAS shall set AQ=1 (Chapter 3.3.1.2.8.1.1) and RL = 0 (Chapter 3, 3.1.2.8.1.2) in an acquisition interrogation.

**4.3.7.1.2.2.2 Tracking interrogations**. ACAS shall use the short air-air surveillance format (UF = 0) with RL = 0 and AQ = 0 for tracking interrogations.

**4.3.7.1.2.3 Surveillance replies**. These protocols are described in 4.3.11.3.1.

**4.3.7.1.2.4 ACAS broadcast**. An ACAS broadcast shall be made nominally every 8 to 10 s at full power from the top antenna. Installations using directional antennas shall operate such that complete circular coverage is provided nominally every 8 to 10s.

**4.3.7.1.3 SURVEILLANCE OF ADS-B MESSAGES FROM INTRUDER AIRCRAFT FOR ACAS X COMPLIANT SYSTEMS**

**4.3.7.1.3.1 Detection.** ACAS shall monitor 1 090 MHz extended squitter.

**4.3.7.1.3.2** ACAS shall receive and use 1 090 MHz extended squitter messages which include information on ADS-B airborne and surface position, airborne velocity, target state and status, and aircraft operational status.

**4.3.7.2 AIR-AIR Coordination Protocols**

*Note 1.— The provisions in this section apply to aircraft that coordinate with ACAS equipped aircraft via 1030/1090 MHz discrete Mode S interrogations/replies.*

*Note 2.— ACAS equipment not capable of utilizing 1030/1090 MHz discrete Mode S interrogations/replies and that will use ADS-B to convey the applicable coordination scheme is under development. ACAS X compliant systems incorporate the ability to coordinate with threats using such ACAS equipment. For more details, refer to Section 2.2.3.9.3.1 of RTCA/DO-385 or EUROCAE/ED-256.*

**4.3.7.2.1 Coordination interrogations**. ACAS shall transmit UF = 16 interrogations (Chapter 3, 3.1.2.3.2, Figure 3-7) with AQ = 0 and RL = 1 when another aircraft reporting RI = 3 or 4 is declared a threat (4.3.4). The MU field shall contain the resolution message in the subfields specified in 4.3.8.4.2.3.2.

**4.3.7.2.2 Coordination reply**. These protocols are described in 4.3.11.3.2.

**4.3.7.3 Protocols for ACAS Communication with Ground Station**

**4.3.7.3.1 RA reports to Mode S ground stations**. These protocols are described in 4.3.11.4.1.

**4.3.7.3.2 RA broadcasts**. RA broadcasts shall be transmitted at full power from the bottom antenna at jittered, intervals. The RA broadcast shall include the MU field as specified in 4.3.8.4.2.3.4. The RA broadcast shall describe the current RA. Installations using directional antennas shall operate such that complete circular coverage is provided.

**4.3.7.3.3 Data link capability report.** These protocols are described in 4.3.11.4.2.

**4.3.7.3.4 ACAS sensitivity level control**.

**4.3.7.3.4.1** For TCAS Version 7.1 compliant systems: ACAS shall act upon an SLC command if and only if TMS (Chapter 3, 3.1.2.6.1.4.1) has the value 0 and DI is either 1 or 7 in the same interrogation.

**4.3.7.3.4.2** For ACAS X compliant systems: ACAS shall receive any SLC commands from Mode S

ground stations but shall not use their sensitivity level values.

### 4.3.8 Signal formats

**4.3.8.1** The RF characteristics of all ACAS signals shall conform to the Standards of Chapter 3, 3.1.1.1 through 3.1.1.6, 3.1.2.1 through 3.1.2.3, 3.1.2.5 and 3.1.2.8.

#### 4.3.8.2 Relationship between ACAS and Mode S signal formats

ACAS uses Mode S transmissions for surveillance and communications. ACAS air-air communication functions permits RA decisions to be coordinated with ACAS-equipped threats. ACAS air-ground communication functions permit the reporting of RAs to ground stations

**4.3.8.3 Signal format conventions**. The data encoding of all ACAS signals shall conform to the Standards of Para 3.1.2.3.

#### 4.3.8.4 Field Description

*Note 1.— The air-air surveillance and communication formats which are used by ACAS but not fully described in Chapter 3, 3.1.2 are given in Figure 4-1.*

*Note 2.— This section defines the Mode S fields (and their subfields) that are processed by ACAS to accomplish ACAS functions. Some of the ACAS fields (those also used for other SSR Mode S functions) are described with unassigned ACAS codes in Chapter 3, 3.1.2.6. Such codes are assigned in 4.3.8.4.1. Fields and subfields used only by ACAS equipment are assigned in 4.3.8.4.2.*

*Note 3.— The bit numbering convention used in 4.3.8.4 reflects the bit numbering within the entire uplink or downlink format rather than the bits within individual fields or subfields.*

The air-air surveillance and communications formats which are used ACAS but not fully described in Chapter 3, 3.1.2 are given in figure 4.1.

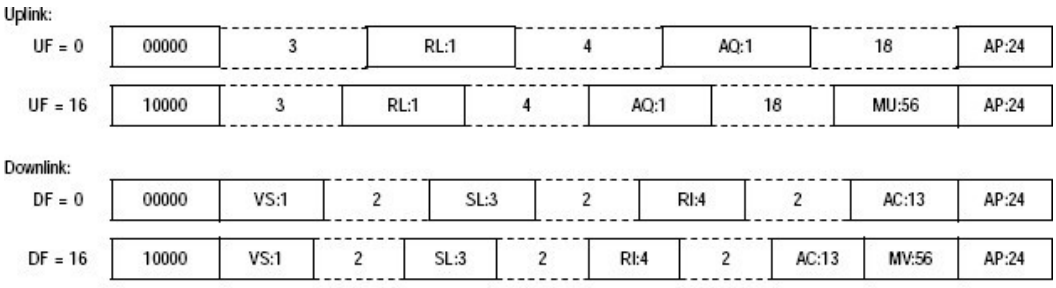


**Figure 4-1. Surveillance and communication formats used by ACAS**

**4.3.8.4.1 Fields and Subfields introduced in chapter 3.3.1.2** Codes for mission fields and subfields that are designated “reserved for ACAS” in Para 3.1.2, are specified in this section.

**4.3.8.4.1.1 DR (downlink request).** The significance of the coding of the downlink request field shall be as follows:

**Coding**

| | |
|---|---|
| 0-1 | See Para 3.3.1.2.6.5.2 |
| 0 | ACAS message available |
| 1 | Comm-B message available and ACAS message available |
| 4-5 | See Para 3.3.1.2.6.5.2 |
| 6 | Comm-B broadcast message 1 available and ACAS message available |
| 7 | Comm-B broadcast message 2 available and ACAS message available |
| 8-31 | See Chapter 3.3.1.2.6.5.2 |

**4.3.8.4.1.2 RI (air-air reply information).** The significance of the coding in the RI field shall be as follows:

**Coding**

| | |
|---|---|
| 0 | No operating ACAS |
| 1 | Not assigned |
| 2 | ACAS with resolution capability inhibited |
| 3 | ACAS with vertical-only resolution capability and capability to utilize 1030/1090 MHz discrete Mode S interrogations/replies for coordination |
| 4 | ACAS with vertical and horizontal resolution capability and capability to utilize 1 030/1 090 MHz discrete Mode S interrogations/replies for coordination |
| 5-6 | Reserved for passive ACAS |
| 7 | Not assigned |
| 8-15 | See Chapter 3.3.1.2.8.2.2 |

Bit 14 of the reply format containing this field shall replicate the AQ bit of the interrogation. The RI field shall report “no operating ACAS” (RI = 0) if the ACAS unit has failed or is in standby. The RI field shall report “ACAS with resolution capability inhibited” (RI = 2) if sensitivity level is 2 or TA only mode has been selected.

**4.3.8.4.1.3 RR (reply request**). The significance of the coding in the reply request field shall be as follows:

Coding

| | |
|---|---|
| 0-18 | See Chapter 3.3.1.2.6.1.2 |
| 19 | Transmit a resolution advisory report |
| 20-31 | See Chapter 3.3.1.2.6.1.2 |

**4.3.8.4.2 ACAS Fields and Subfields 4.3.8.4.2.1 For TCAS Version 7.1 compliant systems: Subfield in MA**

**4.3.8.4.2.1.1 ADS (A-definition subfield).** This 8-bit (33-40) subfield shall define the remainder of MA.

**4.3.8.4.2.1.2** When ADS1 = 0 and ADS2 = 5, the following subfield shall be contained in MA:

**4.3.8.4.2.1.3 SLC (ACAS sensitivity level control (SLC) command**). This 4-bit (41-44) subfield shall denote a sensitivity level command for own ACAS.

**Coding**

| | |
|---|---|
| 0 | No command issued |
| 1 | Not assigned |
| 2 | Set ACAS sensitivity level to 2 |
| 3 | Set ACAS sensitivity level to 3 |
| 4 | Set ACAS sensitivity level to 4 |
| 5 | Set ACAS sensitivity level to 5 |
| 6 | Set ACAS sensitivity level to 6 |
| 7-14 | Not assigned |
| 15 | Cancel previous SLC command from this ground station |

Note1 : Structure of MA for a sensitivity level control command

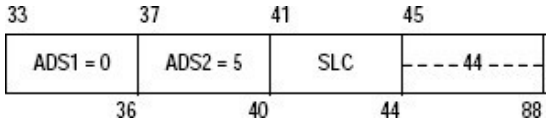


*Note 2.— ACAS X compliant systems receive SLC commands but their sensitivity level values are not used.*

**4.3.8.4.2.2 Subfields in MB**

*Note.— 4.3.8.4.2.2.1 is applicable to TCAS Version 7.1 compliant systems, while 4.3.8.4.2.2.2 is applicable to ACAS X compliant systems. 4.3.8.4.2.2.3 is applicable to both TCAS Version 7.1 and ACAS X compliant systems*

**4.3.8.4.2.2.1** For TCAS Version 7.1 compliant systems Subfields in MB for an RA report. When BDS1 = 3 and BDS2 = 0, the subfields indicated below shall be contained in MB. For 18±1 s following the end of an RA, all MB subfields in the RA report with the exception of bit 59 (RA terminated indicator) shall retain the information reported at the time the RA was last active.

**4.3.8.4.2.2.1.1 ARA (active RAs).** This 14-bit (41-54) subfield shall indicate the characteristics of the RA, if any, generated by the ACAS associated with the transponder transmitting the subfield (4.3.6.2.1 a)). The bits in ARA shall have meanings

determined by the value of the MTE subfield (4.3.8.4.2.2.1.4) and, for vertical RAs, the value of bit 41 of ARA. The meaning of bit 41 of ARA shall be as follows:

**Coding**

0 There is more than one threat and the RA is intended to provide separation below some threat(s) and above some other threat(s) or no RA has been generated (when MTE =0)

1 Either there is only one threat or the RA is intended to provide separation in the same direction for all threats

When ARA bit 41 = 1 and MTE = 0 or 1, bits 42-47 shall have the following meanings:

| Bit | Coding | |
|---|---|---|
| 42 | 0 | RA is preventive |
| | 1 | RA is corrective |
| 43 | 0 | Upward sense RA has been generated |
| | 1 | Downward sense RA has been generated |
| 44 | 0 | RA is not increased rate |
| | 1 | RA is increased rate |
| 45 | 0 | RA is not a sense reversal |
| | 1 | RA is a sense reversal |
| 46 | 0 | RA is not altitude crossing |
| | 1 | RA is altitude crossing |
| 47 | 0 | RA is vertical speed limit |
| | 1 | RA is positive |
| 48-54 | | Reserved for ACAS III |

When ARA bit 41 = 0 and MTE = 1, bits 42-47 shall have the following meanings:

| *Bit* | *Coding* | |
|---|---|---|
| 42 | 0 | RA does not require a correction in the upward sense |
| | 1 | RA requires a correction in the upward sense |
| 43 | 0 | RA does not require a positive climb |
| | 1 | RA requires a positive climb |
| 44 | 0 | RA does not require a correction in the downward sense |
| | 1 | RA requires a correction in the downward sense |
| 45 | 0 | RA does not require a positive descend |
| | 1 | RA requires a positive descend |
| 46 | 0 | RA does not require a crossing |
| | 1 | RA requires a crossing |
| 47 | 0 | RA is not a sense reversal |
| | 1 | RA is a sense reversal |
| 48-54 | | Reserved for ACAS III |

**4.3.8.4.2.2.1.2 RAC (RACs record).** This 4-bit (55-58) subfield shall indicate all the currently active RACs, if any, received from other ACAS aircraft. The bits in RAC shall have the following meanings:

| Bit | Resolution advisory complement |
|---|---|
| 55 | Do not pass below |
| 56 | Do not pass above |
| 57 | Do not turn left |
| 58 | Do not turn right |

A bit set to 1 shall indicate that the associated RAC is active. A bit set to 0 shall indicate that the associated RAC is inactive.

**4.3.8.4.2.2.1.3 RAT (RA terminated indicator).** This 1-bit (59) subfield shall indicate when an RA previously generated by ACAS has ceased being generated.

**Coding**

0 ACAS is currently generating the RA indicated in the ARA subfield
1 The RA indicated by the ARA subfield has been terminated (4.3.11.4.1)

**4.3.8.4.2.2.1.4 MTE (multiple threat encounter).** This 1-bit (60) subfield shall indicate whether two or more simultaneous threats are currently being processed by the ACAS threat resolution logic.

**Coding**

0 One threat is being processed by the resolution logic (when ARA bit 41 = 1); or no threat is being processed by the resolution log (when ARA bit 41 =0)
1 Two or more simultaneous threats are being processed by the resolution logic

**4.3.8.4.2.2.1.5 TTI (threat type indicator subfield).** This 2-bit subfield (61-62) shall define the type of identity data contained in the TID subfield.

**Coding**

0 No identify data in TID
1 TID contains a Mode S transponder address
2 TID contains altitude, range and bearing data
3 Not assigned

**4.3.8.4.2.2.1.6 TID (threat identity data subfield).** This 26-bit subfield (63-88) shall contain the Mode S address of the threat or the altitude, range, and bearing if the threat is not Mode S equipped. If two or more threats are simultaneously processed by the ACAS resolution logic, TID shall contain the identity or position data for the most recently declared threat. If TTI=1, TID shall contain in bits 63-86 the aircraft address of the threat, and bits 87 and 88 shall be set to 0. If TTI = 2, TID shall contain the following three subfields.

**4.3.8.4.2.2.1.6.1 TIDA (threat identity data altitude subfield).** This 13-bit subfield (63-75) shall contain the most recently reported Mode C altitude code of the threat.

| *Coding* | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Bit | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 |
| Mode C code bit | $C_1$ | $A_1$ | $C_2$ | $A_2$ | $C_4$ | $A_4$ | 0 | $B_1$ | $D_1$ | $B_2$ | $D_2$ | $B_4$ | $D_4$ |

**4.3.8.4.2.2.1.6.2 TIDR (threat identity data range subfield).** This 7-bit subfield (76-82) shall contain the most recent threat range estimated by ACAS.

**Coding (n)**

| n | Estimated range(NM) |
|---|---|
| 0 | No range estimate available |
| 1 | Less than0.05 |
| 2-126 | (n-1)/10 ±0.05 |
| 127 | Greater than12.55 |

**4.3.8.4.2.2.1.6.3 TIDB (threat identity data bearing subfield).** This 6-bit subfield (83-88) shall contain the most recent estimated bearing of the threat aircraft, relative to the ACAS aircraft heading.

**Coding (n)**

| n | Estimated bearing(degrees) |
|---|---|
| 0 | No bearing estimate available |
| 1-60 | Between 6(n-1) and6n |
| 61-63 | Not assigned |

*Note.— Structure of MB for an RA report:*

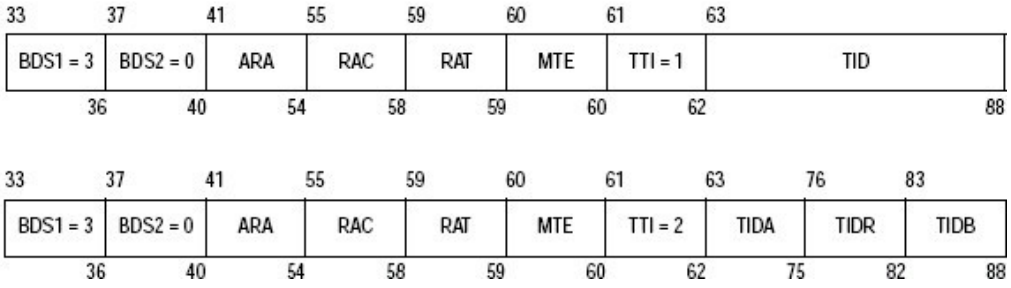


**4.3.8.4.2.2.2** For ACAS X compliant systems: Subfields in MB for an RA report. When BDS1=3 and BDS2=0, the subfields indicated below shall be contained in MB.

**4.3.8.4.2.2.2.1** ARA (active RAs). This 10-bit (41-50) subfield shall indicate the currently active RA if any generated by own ACAS X unit against one or more threat aircraft.

The ARA subfield is further divided into:

a) AVRA (vertical RA). This 7-bit (41-47) subfield contains the vertical component of the ARA as defined below; and

b) AHRA (horizontal RA) .This 3-bit (48-50) subfield contains the horizontal component of the ARA.For ACAS X compliant systems, AHRA=0.

Bits 41-50 shall have the following meanings:

| *Bit* | *Coding* | |
|---|---|---|
| 41 | 0 | Different vertical senses have been generated in a multi-threat encounter (when MTE = 1); or no RA has been generated (when MTE=0) |
| | 1 | The same vertical sense has been generated in a single or multi- threat encounter |
| 42 | 0 | RA is not crossing |
| | 1 | RA is crossing |
| 43 | 0 | Upward sense RA has been generated (i.e. own aircraft intent is to pass above the threat) |
| | 1 | Downward sense RA has been generated (i.e. own aircraft intent is to pass below the threat) |
| 44 | | Strength bit 1 |
| 45 | | Strength bit 2 |
| 46 | | Strength bit 3 |
| 47 | | Strength bit 4 |
| 48-50 | 0 | AHRA |

*Note. —An RA is considered crossing if own aircraft is expected to cross the altitude of the intruder before closest approach, e.g., pass above a threat currently above own aircraft. An RA is considered crossing regardless of whether the word "crossing" is included in the aural annunciation.*

The strength bits indicated in bits 44 - 47 shall have the following meaning:

| *Strength bits* 1 2 3 4 | | |
|---|---|---|
| 0 0 0 0 | 0 | Clear of conflict |
| 0 0 0 1 | 1 | Monitor vertical speed |
| 0 0 1 0 | 2 | Level-off; weakening of positive RA |
| 0 0 1 1 | 3 | Level-off; corrective when climbing/descending |
| 0 1 0 0 | 4 | Climb/descend at 1500 ft/min |
| 0 1 0 1 | 5 | Reversal to climb/descend |
| 0 1 1 0 | 6 | Increase climb/descend |
| 0 1 1 1 | 7 | Maintain rate; at current rate > 1500 ft/min |
| 1 0 0 0 | 8 | Reversal to maintain |
| 1 0 0 1 | 9 | Level-off; reversal to corrective negative RA |
| 1 0 1 0 | 10 | Monitor vertical speed; following descend RA, descend inhibited |
| 1 0 1 1 | 11 | Monitor vertical speed; reversal to preventive negative RA |
| 1 1 0 0 | 12 | Unallocated |
| 1 1 0 1 | 13 | Unallocated |
| 1 1 1 0 | 14 | Preventive multi-threat level off (MTLO) while level |
| 1 1 1 1 | 15 | Corrective MTLO while climbing/descending |

*Note. — For MTLO own aircraft with -500 ft/min to +500 ft/min is "level"; own aircraft with vertical rate > 500 ft/min is "climbing" and own aircraft with vertical rate < -500 ft/min is "descending"*

4.3.8.4.2.2.2.2 *LDI (low-level descend inhibit).* This 2-bit (51-52) subfield is derived from the own aircraft radar altimeter value and shall indicate whether own aircraft is in a region where low level descend inhibits may be applied. The coding shall have the following meanings:

| *Bits 51-52 Coding* | |
|---|---|
| 0 | No descend inhibit |
| 1 | Increase descend RAs inhibited |
| 2 | Both increase descend RAs and descend RAs inhibited |
| 3 | All RAs are inhibited |

4.3.8.4.2.2.2.3 *RMF (RA message format).* This 2-bit (53-54) subfield indicates the collision avoidance (CA) system used to generate bits 41-88 of the RF message. The coding shall have the following meanings:

| *Bits 53-54 Coding* | |
|---|---|
| 0 | All TCAS II versions |
| 1 | ACAS X compliant system |
| 2 | Reserved for ACAS III |
| 3 | Unallocated |

4.3.8.4.2.2.2.4 *RAC (RACs record).* This 4-bit (55-58) subfield shall indicate all the currently active RACs, if any, received from other ACAS aircraft. The bits in RAC shall have the following meanings:

| *Bit* | *Resolution advisory complement* |
|---|---|
| 55 | Do not pass below |
| 56 | Do not pass above |
| 57 | Reserved for horizontal coordination |
| 58 | Reserved for horizontal coordination |

A bit set to 1 shall indicate that the associated RAC is active. A bit set to 0 shall indicate that the associated RAC is inactive.

4.3.8.4.2.2.2.5 *RAT (RA terminated indicator).* This 1-bit (59) subfield shall indicate when an RA previously generated by ACAS has ceased being generated.

| *Coding* | |
|---|---|
| 0 | ACAS is currently generating the RA indicated in the ARA subfield |
| 1 | The RA indicated by the ARA subfield has been terminated (4.3.11.4.1) |

*Note 1. — After an RA has been terminated by ACAS, it is still required to be reported by the Mode S transponder for 18±1 s (4.3.11.4.1). The RA terminated indicator may be used, for example, to permit timely removal of an RA indication from an air traffic controller's display, or for assessments of RA duration within a particular airspace.*

*Note 2. — RAs may terminate for a number of reasons: normally, when the conflict has been resolved and the threat is diverging in range; or when the threat's Mode S transponder for any reason ceases to report altitude during the conflict. The RA terminated indicator is used to show that the RA has been removed in each of these cases.*

4.3.8.4.2.2.2.6 *MTE (multiple threat encounter).* This 1-bit (60) subfield shall indicate whether two or more simultaneous threats are currently being processed by the ACAS threat resolution logic.

*Coding*

0 One threat is being processed by the resolution logic (when ARA bit 41 = 1); or no threat is being processed by the resolution logic (when ARA bit 41 = 0)

1 Two or more simultaneous threats are being processed by the resolution logic

4.3.8.4.2.2.2.7 *CNT (continuation bit).* This 1-bit subfield (61) shall indicate whether a follow-on RF message is being generated to report additional information.

*Coding*

0 No follow-on RF message exists

1 A follow-on RF message exists

4.3.8.4.2.2.2.8 *TTI (threat type indicator subfield).* This 1-bit subfield (62) shall define the type of identity data contained in the TID subfield.

*Coding*

0 TID contains altitude, range and bearing data

1 TID contains a 24-bit aircraft address

4.3.8.4.2.2.2.9 *TID (threat identity data subfield).* This 24-bit subfield (63-86) shall contain the 24- bit aircraft address of the threat or the altitude, range, and bearing if the threat is not Mode S equipped. If two or more threats are simultaneously processed by the ACAS resolution logic, TID shall contain the identity or position data for the most recently declared threat. If TTI = 1, TID shall contain in bits 63-86 the aircraft address of the threat. If TTI = 0, TID shall contain the following three subfields (refer to 4.3.8.4.2.2.2.8).

4.3.8.4.2.2.2.9.1 *TIDA (threat identity data altitude subfield).* This 11-bit subfield (63-73) shall contain the most recent threat altitude estimated by ACAS, expressed in binary to a resolution of 100 ft as follows.

*Coding*

*0* No data

1 Alt < -950 ft

2 -950 ft ≤ Alt < -850 ft

3 -850 ft ≤ Alt < -750 ft

4….

4.3.8.4.2.2.2.9.2 *TIDR (threat identity data range subfield).* This 7-bit subfield (74-80) shall contain the most recent threat range estimated by ACAS.

*Coding (n)*

*n* *Estimated range (NM)*

0 No range estimate available

1 Less than 0.05

| | |
|---|---|
| 2-126 | ($n$-1)/10 ±0.05 |
| 127 | Greater than 12.55 |

4.3.8.4.2.2.2.9.3 *TIDB (threat identity data bearing subfield).* This 6-bit subfield (81-86) shall contain the most recent estimated bearing of the threat aircraft, relative to the ACAS aircraft heading.

*Coding (n)*

| *n* | *Estimated bearing (degrees)* |
|---|---|
| 0 | No bearing estimate available |
| 1-60 | Between 6($n$-1) and 6$n$ |
| 61-63 | *Not assigned* |

4.3.8.4.2.2.2.10 *DSI (designation indicator).* This 1-bit subfield (87) shall be coded as follows:

*Coding*

| | |
|---|---|
| 0 | The threat defined in TID is not designated for Xo or the designation is not applied |
| 1 | The threat defined in TID is designated for Xo, and the designation is applied |

4.3.8.4.2.2.2.11 *SPI (suppression indicator).* This 1-bit subfield (88) shall be coded as follows:

For single-threat encounters:

*Coding*

| | |
|---|---|
| 0 | The RA is not suppressed |
| 1 | The RA is suppressed (not announced to the flight crew) |

For multi-threat encounters, suppression does not apply, so the SPI subfield shall indicate the following designations:

*Coding*

| | |
|---|---|
| 0 | No threat other than the one defined in TID is designated for Xo |
| 1 | Another threat is designated for Xo, and the designation is applied |

*Note.— For ACAS X compliant systems: Subfields in MB for an RA report.*

| 33 | 37 | 41 | 51 | 53 | 55 | 59 | 60 | 61 | 62 | 63 | 74 | 81 | 87 | 88 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| BDS1 = 3 | BDS2 = 0 | ARA | LDI | RMF | RAC | RAT | MTE | CNT | TTI = 0 | TIDA | TIDR | TIDB | DSI | SPI |
| 36 | 40 | 50 | 52 | 54 | 58 | 59 | 60 | 61 | 62 | 73 | 80 | 86 | 87 | 88 |

| 33 | 37 | 41 | 51 | 53 | 55 | 59 | 60 | 61 | 62 | 63 | 87 | 88 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| BDS1 = 3 | BDS2 = 0 | ARA | LDI | RMF | RAC | RAT | MTE | CNT | TTI = 1 | TID | DSI | SPI |
| 36 | 40 | 50 | 52 | 54 | 58 | 59 | 60 | 61 | 62 | 86 | 87 | 88 |

**4.3.8.4.2.2.3 Subfields in MB for the data link capability report**. When BDS1 = 1 and BDS2 = 0, the following bit patterns shall be provided to the transponder for its data link capability report:

| Bit | Coding | |
|---|---|---|
| 43-46 | 0000 | TCAS Version 7.1 compliant and other systems defined by bits 71 and 72 |
| | 0001 | ACAS Xa (RTCA/DO-385 and EUROCAE/ED-256) |
| | 0010 to 1111 | Reserved for ACAS III |
| 48 | 0 | ACAS failed or on standby |
| | 1 | ACAS operating |
| 69 | 0 | Hybird surveillance not operational. |
| | 1 | Hybird surveillance fitted and operational. |
| 70 | 0 | ACAS generating TAs only |
| | 1 | ACAS generating TAs and RAs |

| Bit 72 | Bit 71 | ACAS Version |
|---|---|---|
| 0 | 0 | RTCA/DO-185 (pre ACAS) |
| 0 | 1 | RTCA/DO-185A |
| 1 | 0 | RTCA/DO-185B and EUROCAE ED 143 |
| 1 | 1 | All later systems (see Note 3) and 4.3.8.4.2. |

*Note 1.— A summary of the MB subfields for the data link capability report structure is described in Chapter 3, 3.1.2.6.10.2.2.*

*Note 2.— The use of hybrid surveillance to limit ACAS active interrogations is described in 4.5.1. The ability only to support decoding of DF = 17 extended squitter messages is not sufficient to set bit69.*

*Note 3.— Future versions of ACAS will be identified using part numbers and software version numbers specified in registers $E5_{16}$ and $E6_{16}$.*

**4.3.8.4.2.3 MU field.** This 56-bit (33-88) field of long air-air surveillance interrogations (Figure 4-1) shall be used to transmit resolution messages, ACAS broadcasts and RA broadcasts.

**4.3.8.4.2.3.1 UDS (U-definition subfield).** This 8-bit (33-40) subfield shall define the remainder of MU.

**4.3.8.4.2.3.2 Subfields in MU for a resolution message**. When UDS1 = 3 and UDS2 = 0 the following subfields shall be contained in MU:

**4.3.8.4.2.3.2.1 MTB (multiple threat bit).** This 1-bit (42) subfield shall indicate the presence or absence of multiple threats.

**Coding**

0 Interrogating ACAS has not more than one threat
1 Interrogating ACAS has more than one threat

**4.3.8.4.2.3.2.2 VRC (vertical RAC).** This 2-bit (45-46) subfield shall denote a vertical RAC relating to the addressed aircraft.

**Coding**

0 No vertical RAC sent

1 Do not pass below
2 Do not pass above
3 Not assigned

**4.3.8.4.2.3.2.3 CVC (cancel vertical RAC).** This 2-bit (43-44) subfield shall denote the cancellation of a vertical RAC previously sent to the addressed aircraft. This subfield shall be set to 0 for a new threat.

**Coding**

0 No cancellation
1 Cancel previously sent "Do not pass below"
2 Cancel previously sent "Do not pass above"
3 Not assigned

**4.3.8.4.2.3.2.4 HRC (horizontal RAC).** This 3-bit (50-52) subfield shall denote a horizontal RAC relating to the addressed aircraft.

**Coding**

0 No horizontal RAC or no horizontal resolution capability
1 Other ACAS sense is turn left; do not turn left
2 Other ACAS sense is turn left; do not turn right
3 Not assigned
4 Not assigned
5 Other ACAS sense is turn right; do not turn left
6 Other ACAS sense is turn right; do not turn right
7 Not assigned

**4.3.8.4.2.3.2.5 CHC (cancel horizontal RAC).** This 3-bit (47-49) subfield shall denote the cancellation of a horizontal RAC previously sent to the addressed aircraft. This subfield shall be set to 0 for a new threat.

**Coding**

0 No cancellation or no horizontal resolution capability
1 Cancel previously sent “Do not turn left”
2 Cancel previously sent “Do not turn right”
3-7 Not assigned

**4.3.8.4.2.3.2.6 VSB (vertical sense bits subfield).** This 4-bit (61-64) subfield shall be used to protect the data in the CVC and VRC subfields. For each of the 16 possible combinations of bits 43-46 the following VSB code shall be transmitted:

| | **CVC** | | **VRC** | | | | **VSB** | |
|---|---|---|---|---|---|---|---|---|
| **Coding** | 43 | 44 | 45 | 46 | 61 | 62 | 63 | 64 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 |
| 2 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 1 |
| 3 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 4 | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 |
| 5 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| 6 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 |
| 7 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 |
| 8 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 1 |
| 9 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 |
| 10 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| 11 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 0 |
| 12 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 |
| 13 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 0 |
| 14 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 |
| 15 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

**4.3.8.4.2.3.2.7 HSB (horizontal sense bits subfield).** This 5-bit (56-60) subfield shall be used to protect the data in the CHC and HRC subfields. For each of the 64 possible combinations of bits 47-52 the following HSB code shall be transmitted:

| | | **CHC** | | | **HRC** | | | | **HSB** | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **Coding** | 47 | 48 | 49 | 50 | 51 | 52 | 56 | 57 | 58 | 59 | 60 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 1 |
| 2 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 1 |
| 3 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 |
| 4 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0 |
| 5 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 1 |
| 6 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 1 |
| 7 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 0 |
| 8 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 |
| 9 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 |
| 10 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 0 |
| 11 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 1 |
| 12 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 |
| 13 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 0 |
| 14 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 0 |
| 15 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 1 |
| 16 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 |
| 17 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| 18 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 0 |
| 19 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| 20 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 21 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 |
| 22 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 0 |
| 23 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 1 |
| 24 | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 25 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 |
| 26 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 |
| 27 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |
| 28 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| 29 | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 1 |

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 30 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 1 |
| 31 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 |
| 32 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 |
| 33 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 |
| 34 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 0 |
| 35 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 |
| 36 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| 37 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 0 |
| 38 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 0 |
| 39 | 1 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 |
| 40 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 |
| 41 | 1 | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| 42 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 1 |
| 43 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 |
| 44 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |
| 45 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 1 |
| 46 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 |
| 47 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 |
| 48 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 |
| 49 | 1 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 1 |
| 50 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |
| 51 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 0 |
| 52 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| 53 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 1 |
| 54 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |
| 55 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 |
| 56 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 57 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| 58 | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 |
| 59 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 1 |
| 60 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 1 |
| 61 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 |
| 62 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 0 |
| 63 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 |

**4.3.8.4.2.3.2.8 MID (Aircraft address**). This 24-bit (65-88) subfield shall contain the 24-bit aircraft address of the interrogating ACAS aircraft.

*Note.— Structure of MU for a resolution message:*

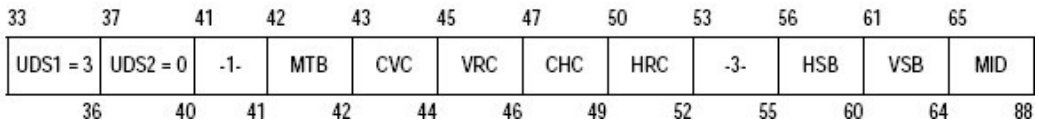


**4.3.8.4.2.3.3** Subfields in MU for an ACAS broadcast. When UDS1 = 3 and UDS2 = 2, the following subfield shall be contained in MU:

**4.3.8.4.2.3.3.1 MID (Aircraft address).** This 24-bit (65-88) subfield shall contain the 24-bit

aircraft address of the interrogating ACAS aircraft.

*Note.— Structure of MU for an ACAS broadcast:*

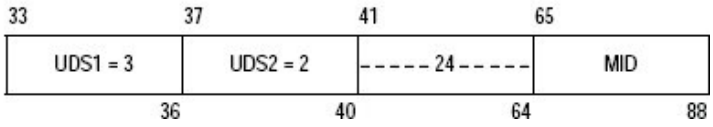


#### 4.3.8.4.2.3.4 Subfields in MU for an RA broadcast (RA broadcast interrogation message)

*Note. — 4.3.8.4.2.3.4.1 is only applicable to TCAS Version 7.1 compliant systems, while 4.3.8.4.2.3.4.2 is only applicable to ACAS X compliant systems.*

**4.3.8.4.2.3.4.1** ***For TCAS Version 7.1 compliant systems:*** Subfields in MU for an RA broadcast *broadcast (RA broadcast interrogation message)*. When UDS 1 = 3 and UDS 2 = 1, the following subfields shall be contained in MU:

**4.3.8.4.2.3.4.1.1 ARA (active RAs**). This 14-bit (41-54) subfield shall be coded as defined in 4.3.8.4.2.2.1.1.

**4.3.8.4.2.3.4.1.2 RAC (RACs record**). This 4-bit (55-58) subfield shall be coded as defined in 4.3.8.4.2.2.1.2.

**4.3.8.4.2.3.4.1.3 RAT (RA terminated indicator**). This 1-bit (59) subfield shall be coded as defined in 4.3.8.4.2.2.1.3.

**4.3.8.4.2.3.4.1.4 MTE (multiple threat encounter**). This 1-bit (60) subfield shall be coded as defined in4.3.8.4.2.2.1.4.

**4.3.8.4.2.3.4.1.5 AID (Mode A identity code**). This 13-bit (63-75) subfield shall denote the Mode A identity code of the reporting aircraft.

| Coding: Bit No. | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Mode A Code bit | $A_4$ | $A_2$ | $A_1$ | $B_4$ | $B_2$ | | 0 | $C_4$ | $C_2$ | $C_1$ | $D_4$ | $D_2$ | $D_1$ |

**4.3.8.4.2.3.4.1.6 CAC (Mode C altitude code**). This 13-bit (76-88) subfield shall denote the Mode C altitude code of the reporting aircraft.

| *Coding* | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Bit | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 |
| Mode C code bit | $C_1$ | $A_1$ | $C_2$ | $A_2$ | $C_4$ | $A_4$ | 0 | $B_1$ | $D_1$ | $B_2$ | $D_2$ | $B_4$ | $D_4$ |

*Note.— Structure of MU for an RA broadcast:*

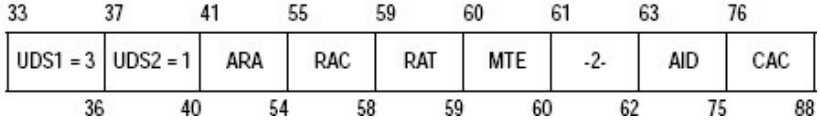


4.3.8.4.2.3.4.*2 For ACAS X compliant systems: Subfields in MU for an RA broadcast (RA broadcast interrogation message). When UDS1 = 3 and UDS2 = 1, the follow*ing subfields shall be contained in MU:

4.3.8.4.2.3.4.2.1 *ARA (active RAs).* This 10-bit (41-50) subfield shall be coded as defined in 4.3.8.4.2.2.2.1.

4.3.8.4.2.3.4.2.2 *LDI (low-level descend inhibit).* This 2-bit (51-52) subfield shall be coded as defined in 4.3.8.4.2.2.2.2.

4.3.8.4.2.3.4.2.3 *RMF (RA message format).* This 2-bit (53-54) subfield shall be coded as defined in 4.3.8.4.2.2.2.3.

4.3.8.4.2.3.4.2.4 *RAC (RACs record).* This 4-bit (55-58) subfield shall be coded as defined in 4.3.8.4.2.2.2.4.

4.3.8.4.2.3.4.2.5 *RAT (RA terminated indicator).* This 1-bit (59) subfield shall be coded as defined in 4.3.8.4.2.2.2.5.

4.3.8.4.2.3.4.2.6 *MTE (multiple threat encounter).* This 1-bit (60) subfield shall be coded as defined in 4.3.8.4.2.2.2.6.

4.3.8.4.2.3.4.2.7 *SPI (Suppression indicator).* This 1-bit (61) subfield shall be coded as defined in 4.3.8.4.2.2.2.11.

4.3.8.4.2.3.4.2.8 *AID (Mode A identity code).* This 13-bit (63-75) subfield shall denote the Mode A identity code of the reporting aircraft.

*Coding*

| Bit | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Mode A code bit | $A_4$ | $A_2$ | $A_1$ | $B_4$ | $B_2$ | $B_1$ | 0 | $C_4$ | $C_2$ | $C_1$ | $D_4$ | $D_2$ | $D_1$ |

4.3.8.4.2.3.4.2.9 *CAC (Mode C altitude code).* This 13-bit (76-88) subfield shall denote the Mode C altitude code of the reporting aircraft.

*Coding*

| Bit | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Mode C code bit | $C_1$ | $A_1$ | $C_2$ | $A_2$ | $C_4$ | $A_4$ | 0 | $B_1$ | $D_1$ | $B_2$ | $D_2$ | $B_4$ | $D_4$ |

*Note. — Structure of MU for an RA broadcast:*



**4.3.8.4.2.4 MV field.** This 56-bit (33-88) field of long air-air surveillance replies (Figure 4-1) shall be used to transmit air-air coordination reply messages.

**4.3.8.4.2.4.1 VDS (V-definition subfield**). This 8-bit (33-40) subfield shall define the remainder of MV.

**4.3.8.4.2.4.2 Subfields in MV for a coordination reply.**
*Note. — 4.3.8.4.2.4.2.1 is only applicable to TCAS Version 7.1 compliant systems, while 4.3.8.4.2.4.2.2 is only applicable to ACAS X compliant systems*

**4.3.8.4.2.4.2.1** *For TCAS Version 7.1 compliant systems:* When VDS1 = 3 and VDS2 = 0, the following subfields shall be contained in MV:

**4.3.8.4.2.4.2.1.1 ARA (active RAs).** This 14-bit (41-54) subfield shall be coded as defined in 4.3.8.4.2.2.1.1.

**4.3.8.4.2.4.2.1.2 RAC (RACs record).** This 4-bit (55-58) subfield shall be coded as defined in 4.3.8.4.2.2.1.2.

**4.3.8.4.2.4.2.1.3 RAT (RA terminated indicator**). This 1-bit (59) subfield shall be coded as defined in 4.3.8.4.2.2.1.3.

**4.3.8.4.2.4.2.1.4 MTE (multiple threat encounter**). This 1-bit (60) subfield shall be coded as defined in 4.3.8.4.2.2.1.4.

*Note.— Structure of MV for a coordination reply:*

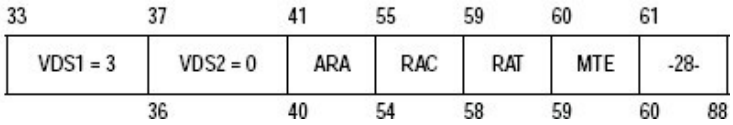


**4.3.8.4.2.4.2.2** ***For ACAS X compliant systems:*** *Subfields in MV for a coordination reply.* When VDS1 = 3 and VDS2 = 0, the following subfields shall be contained in MV:

**4.3.8.4.2.4.2.2.1** ***ARA (active RAs).*** This 10-bit (41-50) subfield shall be coded as defined in 4.3.8.4.2.2.2.1.

**4.3.8.4.2.4.2.2.2** ***LDI (low-level descend inhibit).*** This 2-bit (51-52) subfield shall be coded as defined in 4.3.8.4.2.2.2.2.

**4.3.8.4.2.4.2.2.3** ***RMF (RA message format).*** This 2-bit (53-54) subfield shall be coded as defined in 4.3.8.4.2.2.2.3.

**4.3.8.4.2.4.2.2.4** ***RAC (RACs record).*** This 4-bit (55-58) subfield shall be coded as defined in 4.3.8.4.2.2.2.4.

**4.3.8.4.2.4.2.2.5** ***RAT (RA terminated indicator).*** This 1-bit (59) subfield shall be coded as defined in 4.3.8.4.2.2.2.5.

**4.3.8.4.2.4.2.2.6** ***MTE (multiple threat encounter).*** This 1-bit (60) subfield shall be coded as defined in 4.3.8.4.2.2.2.6.

*Note. — Structure of MV for a coordination reply:*




**4.3.8.4.2.5 SL (sensitivity level report).** This 3-bit (9-11) downlink field shall be included in both short and long air-air reply formats (DF = 0 and 16). This field shall denote the sensitivity level at which ACAS is currently operating.

**Coding**

0 ACAS inoperative
1 ACAS is operating at sensitivity level 1
2 ACAS is operating at sensitivity level 2
3 ACAS is operating at sensitivity level 3
4 ACAS is operating at sensitivity level 4
5 ACAS is operating at sensitivity level 5
6 ACAS is operating at sensitivity level 6
7 ACAS is operating at sensitivity level 7

*Note. — For ACAS X compliant systems: ACAS will not transmit an SL code greater than 3.*

**4.3.8.4.2.7** ***For ACAS X compliant systems****: Extended squitter ME field for use in air-to-air coordination.* This 56-bit (33-88) field shall be used for air-to-air coordination involving ADS-B only equipped intruders (intruders that cannot receive a discrete 1 030 MHz resolution message).

*Note. — ADS-B messages with TYPE code = 28 (ADS-B operational coordination message, refer to 4.3.8.4.2.7.1) and TYPE code = 31 (ADS-B aircraft operational status message, refer to 4.3.8.4.2.7.2) are used in air-to-air coordination.*

4.3.8.4.2.7.1 *Subfields in ME for ADS-B operational coordination message (OCM).*

*Note. — In the subfields defined below, the bit number is relative to the start of the extended squitter, where bit 33 is the start of the ME message field.*

**4.3.8.4.2.7.1.1** ***TYPE***. This 5-bit (33-37) subfield that defines the type of extended squitter shall be set to 28 for the ADS-B OCM.

**4.3.8.4.2.7.1.2** ***Subtype***. This 3-bit (38-40) subfield that further defines TYPE shall be set to 3 for the ADS-B OCM.

**4.3.8.4.2.7.1.3** ***MTB (multiple threat bit).*** This 1-bit (42) subfield shall indicate a multiple threat according to the codes as defined in 4.3.8.4.2.3.

**4.3.8.4.2.7.1.4** ***CVC (cancel vertical RAC).*** This 2-bit (43-44) subfield shall be used by airborne ACAS X equipment to cancel a vertical resolution advisory complement sent to an ACAS equipped threat aircraft with codes as defined in 4.3.8.4.2.3.

**4.3.8.4.2.7.1.5** ***VRC (vertical RAC).*** This 2-bit (45-46) subfield shall be used by airborne ACAS X equipment to send a vertical resolution advisory complement ("do not pass above" or "do not pass below") to an ACAS equipped threat aircraft with codes as defined in 4.3.8.4.2.3.

**4.3.8.4.2.7.1.6** ***CHC (cancel horizontal RAC).*** This 3-bit (47-49) subfield shall be used by ACAS X with horizontal on-board resolution equipment to cancel a horizontal resolution advisory complement sent to an ACAS equipped threat aircraft with codes as defined in 4.3.8.4.2.3. The CHC shall be set to 0 in TCAS resolution messages transmitted by ACAS X without horizontal resolution capability.

**4.3.8.4.2.7.1.7** ***HRC (horizontal RAC).*** This 3-bit (50-52) subfield shall be used by ACAS X with horizontal on-board resolution equipment to send a horizontal resolution advisory complement to manoeuvre ("do not turn left" or "do not turn right") to the ACAS equipped threat aircraft with codes as defined in 4.3.8.4.2.3. The HRC shall be set to 0 in ADS-B OCMs transmitted by ACAS X without horizontal resolution capability.

**4.3.8.4.2.7.1.8** ***HSB (horizontal sense bits subfield).*** This 5-bit (53-57) subfield shall be used as a parity coding field to protect the six horizontal sense bits (47-52). The originating aircraft equipped with ACAS which is capable of 1 030/1 090 MHz transmission and that sends a coordination message shall include bits 53-57 with code as defined in 4.3.8.4.2.3 in all ADS-B OCMs sent. The receiving ACAS X aircraft shall examine HSB (bits 53-57) in the ADS-B OCMs. If the six vertical sense bits (47-52) are not in agreement with the HSB (bits 53-57), the receiving ACAS X aircraft detects there is an error in the message and shall not use the message contents.

**4.3.8.4.2.7.1.9** ***VSB (vertical sense bits subfield).*** This 4-bit (58-61) subfield shall be used as a parity coding field to protect the four vertical sense bits (43-46). The originating active ACAS shall include VSB (bits 58-61) with codes as defined in 4.3.8.4.2.3 in all operational coordination messages sent. The receiving ACAS X shall examine VSB (bits 58-61) in operational coordination messages received. If four vertical sense bits (43-46) are not in agreement with VSB (bits 58-61), the receiving ACAS X aircraft detects there is an error in the message and shall not use the message contents.

**4.3.8.4.2.7.1.10** ***TAA (threat identity aircraft address).*** This 24-bit (65-88) subfield shall contain the 24-bit aircraft address of the threat with codes as defined in 4.3.8.4.2.3.

*Note. —The structure of ME for an operational coordination message is:*

| Position | # of bits | Subfield | Remarks |
|---|---|---|---|
| 33-37 | 5 | TYPE | = 28 |
| 38-40 | 3 | Subtype | = 3 |
| 41 | 1 | - | Not assigned |
| 42 | 1 | MTB | - |
| 43-44 | 2 | CVC | - |
| 45-46 | 2 | VRC | - |
| 47-49 | 3 | CHC | - |

| | | | |
|---|---|---|---|
| 50-52 | 3 | HRC | - |
| 53-57 | 5 | HSB | - |
| 58-61 | 4 | VSB | - |
| 62-64 | 3 | - | Not assigned |
| 65-88 | 24 | TAA | - |

**4.3.8.4.2.7.2 *Subfields in ME for* aircraft operational status message**.

*Note. — In the subfields defined below, the bit number is relative to the start of the extended squitter, where bit 33 is the start of the ME message field.*

**4.3.8.4.2.7.2.1 *TYPE***. This 5-bit (33-37) subfield that defines the type of extended squitter shall be set to 31 for the Aircraft operational status message.

**4.3.8.4.2.7.2.2 *Subtype***. This 3-bit (38-40) subfield that further defines TYPE shall be set to 0 for airborne aircraft and 1 for surface aircraft. For ACAS X air-to-air coordination purposes, Subtype shall always be set to 0.

**4.3.8.4.2.7.2.3 *CC (airborne capability class code).***This 16-bit (41-56) subfield which is part of Subtype=0 messages shall be coded as defined in 4.3.8.4.2.7.2.3.1 to 4.3.8.4.2.7.2.3.4.

4.3.8.4.2.7.2.3.1 *Bit (41-42).* This 2-bit (41-42) subfield shall be set to 0 for ACAS air-to-air coordination purposes.

4.3.8.4.2.7.2.3.2 *CA Operational (collision avoidance operational).* This 1-bit (43) subfield shall be set to 1 to indicate that a collision avoidance system is available and operational and capable of issuing resolution advisories. When this bit is set to 1, the collision avoidance coordination capability bits shall be examined to provide detailed coordination information.

*Note. — For all TCAS II versions and ACAS X compliant systems, the associated Mode S transponder sets the CA Operational bit=1 when RI=3 or 4.*

4.3.8.4.2.7.2.3.3 Bits (44-54) shall not be used by the ACAS X air-to-air coordination process but are reserved for future use.

4.3.8.4.2.7.2.3.4 *DAA (detect and avoid).* This 2-bit (55-56) subfield shall be used as defined below:

| | |
|---|---|
| 00 | No DAA capability or no capability of DAA system to receive CA coordination information |
| 01 | Aircraft has a DAA system capable of receiving TCAS resolution messages and ADS-B OCMs |
| 10 | Aircraft has a DAA system capable of receiving only ADS-B OCMs |
| 11 | Not defined |

*Note 1. — The DAA bits indicate whether and what type of coordination information needs to be provided to the aircraft so that the DAA system of the threat aircraft can listen and provide guidance that is interoperable with ACAS. These bits are independent of the CA Coordination capability bits, as aircraft with a DAA system may or may not have an ACAS .For more details of DAA bits, refer to RTCA/DO-365.*

*Note 2. — The type of coordination message transmitted, resolution message or ADS-B OCM, depends both on the receive capability of the DAA system and on the transmit capability of the ACAS. If the DAA system can receive both the resolution message and the OCM, an ACAS with 1 030 MHz transmit capability is required to transmit the resolution message.*

4.3.8.4.2.7.2.4 *OM (airborne operational mode).* This 16-bit (57-72) subfield which is part of Subtype=0 messages shall be coded as defined in 4.3.8.4.2.7.2.4.1 to 4.3.8.4.2.7.2.4.3.

4.3.8.4.2.7.2.4.1 *Bits (57-58).* This 2-bit (57-58) subfield shall be set to 0 for ACAS X air-to-air coordination purposes.

4.3.8.4.2.7.2.4.2 *Bits (59-64) and Bit 72.* The bits (59-64) and bit 72 shall not be used by the ACAS X air-to-air coordination process.

4.3.8.4.2.7.2.4.3 *CCCB (collision avoidance coordination capability bits).* This 7-bit (65-71) subfield shall be used as defined below:

Vertical and horizontal (2 bits (65-66))

| | |
|---|---|
| 00 | Vertical |
| 01 | Horizontal |
| 10 | Blended |
| 11 | Reserved |

Aircraft CAS Type / Capability (3 bits (67-69))

| | |
|---|---|
| 000 | Active ACAS (TCAS II) |
| 001 | Active ACAS (except all TCAS II) |
| 010 | Active ACAS (except all TCAS II) with OCM transmit capability |
| 011 | Responsive ACAS |
| 100 | Passive ACAS with 1 030 MHz resolution message receive capability |
| 101 | Passive ACAS with only OCM receive capability |
| 110 to 111 | Reserved |

Reserved (2 bits (70-71))

| | |
|---|---|
| 00 to 11 | Intended for unmanned aircraft systems use |

*Note. — The two reserved bits marked 'Intended for unmanned aircraft systems use' are envisioned as a priority field to distinguish among users with different levels of capability or as directed by regulatory authorities.*

4.3.8.4.2.8 *ACAS unit part number and ACAS software part number.* If the ACAS and associated transponder have the necessary capacity, ACAS shall transmit its unit part number to transponder register $E5_{16}$ and shall transmit its software part number to transponder register $E6_{16}$.

*Note. — The data formats for transponder registers $E5_{16}$ and $E6_{16}$ are specified in the* Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871).*

**4.3.8.4.2.6** ***CC: Cross-link capability*****.** This 1-bit (7) downlink field shall indicate the ability of the transponder to support the cross-link capability, i.e. decode the contents of the DS field in an interrogation with UF equals 0 and respond with the contents of the specified GICB register in the corresponding reply with DF equals16.

**Coding**

0 signifies that the transponder cannot support the cross-link capability.
1 signifies that the transponder supports the cross-link capability

### 4.3.9 ACAS equipment characteristics

**4.3.9.1 Interfaces**. As a minimum, the following input data shall be provided to the ACAS:

a) aircraft address code;

b) air-air and ground-air Mode S transmissions received by the Mode S transponder for use by ACAS(4.3.6.3.2);

c) own aircraft's maximum cruising true airspeed capability (Chapter 3, 3.1.2.8.2.2);

d) pressure altitude; and

e) radio altitude.

f) operating mode control (standby, TA only and TA/RA Mode);

g) for ACAS X compliant systems: heading;

h) for ACAS X compliant systems: GNSS own aircraft's position and velocity;

i) for ACAS X compliant systems: ADS-B airborne and surface position, airborne velocity, target state and status, and aircraft operational status messages from other aircraft for use by ACAS; and

j) for ACAS X-compliant systems with Xo special modes available: Designation information for special operation mode.

*Note. — Specific requirements for additional inputs for ACAS II and III are listed in the appropriate sections below.*

**4.3.9.2 Aircraft antenna system.** ACAS shall transmit interrogations and receive replies via two antennas, one mounted on the top of the aircraft and the other on the bottom of the aircraft. The top-mounted antenna shall be directional and capable of being used for direction finding.

**4.3.9.2.1 Polarization.** Polarization of ACAS transmissions shall be nominally vertical.

**4.3.9.2.2 Radiation pattern.** The radiation pattern in elevation of each antenna when installed on an aircraft shall be nominally equivalent to that of a quarter-wave monopole on a ground plane.

**4.3.9.2.3 Antenna Selection**

**4.3.9.2.3.1 Squitter reception.** ACAS shall be capable of receiving squitters via the top and bottom antennas.

**4.3.9.2.3.2 Interrogations.** ACAS interrogations shall not be transmitted simultaneously on both antennas.

**4.3.9.3 Pressure altitude source**. The altitude data for own aircraft provided to ACAS shall be obtained from the source that provides the basis for own Mode C or Mode S reports and they shall be provided at the finest quantization available.

**4.3.9.3.1** A source providing a resolution finer than 7.62 m (25 ft) should beused.

**4.3.9.3.2** Where a source providing a resolution finer than 7.62 m (25 ft) is not available, and the only altitude data available for own aircraft is Gilhamen coded, at least two independent sources shall be used and compared continuously in order to detect encoding errors.

**4.3.9.3.3** Two altitude data sources should be used and compared in order to detect errors before provision to ACAS.

**4.3.9.3.4** The provisions of 4.3.10.3 shall apply when the comparison of the two altitude data sources indicates that one of the sources is in error.

**4.3.10 Monitoring**

**4.3.10.1 Monitoring function**. ACAS shall continuously perform a monitoring function in order to provide a warning if any of the following conditions at least are satisfied:

a) there is no interrogation power limiting due to interference control (4.3.2.2.2) and the maximum radiated power is reduced to less than that necessary to satisfy the surveillance requirements specified in 4.3.2;or

b) any other failure in the equipment is detected which results in a reduced capability of providing TAs or RAs; or

c) data from external sources indispensable for ACAS operation are not provided, or the data provided are not credible.

**4.3.10.2 Effect on ACAS operation**. The ACAS monitoring function shall not adversely affect other ACAS functions.

**4.3.10.3 Monitoring response**. When the monitoring function detects a failure (4.3.10.1), ACAS shall:

a) indicate to the flight crew that an abnormal condition exists;

b) prevent any further ACAS interrogations; and

c) cause any Mode S transmission containing own aircraft's resolution capability to indicate that ACAS is not operating.

### 4.3.11 Requirements for a Mode S transponder used in conjunction with ACAS

**4.3.11.1 Transponder capabilities**. In addition to the minimum transponder capabilities defined in Chapter 3, 3.1, the Mode S transponder used in conjunction with ACAS shall have the following capabilities:

a) ability to handle the following formats:

| Format No. | Format name |
|---|---|
| UF=16 | Long air-air surveillance interrogation |
| DF=16 | Long air-air surveillance reply |

b) ability to receive long Mode S interrogations (UF = 16) and generate as per 3.1.2.10.3.7.3;

c) means for delivering the ACAS data content of all accepted interrogations addressed to the ACAS equipment;

d) antenna diversity (as specified in Chapter 3,3.1.2.10.4);

e) mutual suppression capability; and

f) inactive state transponder output power restriction.

When the Mode S transponder transmitter is in the inactive state, the peak pulse power at 1 090 MHz ±3 MHz at the terminals of the Mode S transponder antenna shall not exceed -70dBm.

#### 4.3.11.2 Data Transfer Between ACAS And Its Mode S Transponder

##### 4.3.11.2.1 Data transfer from ACAS to its Mode S transponder:

a) The Mode S transponder shall receive from its ACAS RA information for transmission in an RA report (4.3.8.4.2.2.1) and in a coordination reply (4.3.8.4.2.4.2);

b) the Mode S transponder shall receive from its ACAS current sensitivity level for transmission in a sensitivity level report(4.3.8.4.2.5);

c) the Mode S transponder shall receive from its ACAS capability information for transmission in a data link capability report (4.3.8.4.2.2.2) and for transmission in the RI field of air-air downlink formats DF = 0 and DF = 16 (4.3.8.4.1.2);and

d) the Mode S transponder shall receive from its ACAS an indication that RAs are enabled or inhibited for transmission in the RI field of downlink formats 0 and 16.

**4.3.11.2.2 Data transfer from Mode S transponder to its ACAS**:

a) For TCAS Version 7.1 compliant systems The Mode S transponder shall transfer to its ACAS received sensitivity level control commands (4.3.8.4.2.1.1) transmitted by Mode S stations;

b) the Mode S transponder shall transfer to its ACAS received ACAS broadcast messages (4.3.8.4.2.3.3) transmitted by other ACASs;

c) the Mode S transponder shall transfer to its ACAS received resolution messages (4.3.8.4.2.3.2) transmitted by other ACASs for air-air coordination purposes; and

d) the Mode S transponder shall transfer to its ACAS own aircraft's Mode A identity data for transmission in an RA broadcast (4.3.8.4.2.3.4.5).

**4.3.11.3 Communication of ACAS Information To other ACAS**

**4.3.11.3.1 Surveillance reply.** The ACAS Mode S transponder shall use the short (DF = 0) or long (DF = 16) surveillance formats for replies to ACAS surveillance interrogations. The surveillance reply shall include the VS field as specified in Chapter 3, 3.1.2.8.2, the RI field as specified in Chapter 3, 3.1.2.8.2 and in 4.3.8.4.1.2, and the SL field as specified in4.3.8.4.2.5.

**4.3.11.3.2 Coordination reply.** The ACAS Mode S transponder shall transmit a coordination reply upon receipt of a coordination interrogation from an equipped threat subject to the conditions of 4.3.11.3.2.1. The coordination reply shall use the long air-air surveillance reply format, DF = 16, with the VS field as specified in Chapter 3, 3.1.2.8.2, the RI field as specified in Chapter 3, 3.1.2.8.2 and in 4.3.8.4.1.2, the SL field as specified in 4.3.8.4.2.5 and the MV field as specified in 4.3.8.4.2.4.

**4.3.11.3.2.1** The ACAS Mode S transponder shall reply with a coordination reply to a coordination interrogation received from another ACAS if and only if the transponder is able to deliver the ACAS data content of the interrogation to its associated ACAS.

**4.3.11.4 Communication Of ACAS Information To Ground Stations**

**4.3.11.4.1 RA reports to Mode S ground stations**. During the period of an RA and for 18±1 s following the end of the RA, the ACAS Mode S transponder shall indicate that it has an RA report by setting the appropriate DR field code in replies to a Mode S sensor as specified in 4.3.8.4.1.1. The RA report shall include the MB field as specified in 4.3.8.4.2.2.1. The RA report shall describe the most recent RA that existed during the preceding 18±1 s period.

**4.3.11.4.2 Data link capability report.** The presence of an ACAS shall be indicated by its Mode S transponder to a ground station in the Mode S data link capability report.

### 4.3.12 Indications To The Flight Crew

#### 4.3.12.1 Corrective And Preventive RAs

Indications to the flight crew should distinguish between preventive and corrective RAs.

#### 4.3.12.2 Altitude Crossing RAs

If ACAS generates an altitude crossing RA, a specific indication should be given to the flight crew that it is crossing.

## 4.4 Performance of the ACAS II Collision Avoidance Logic

*Note 1. — Caution is to be observed when considering potential improvements to ACAS since changes may affect more than one aspect of the system performance. It is essential that alternative designs would not degrade the perforances of other designs and that such compatibility is demonstrated with a high degree of confidence. The performance specified in Section 4.4 is based on the performance achieved by TCAS Version 7.1 compliant systems.*

*Note 2. — The performance of ACAS X compliant systems is improved compared to the performance of TCAS Version 7.1 compliant systems. For more information, refer to the Airborne Collision Avoidance System (ACAS) Manual* (Doc 9863).

### 4.4.1 Definitions relating to the performance of the collision avoidance logic

**Altitude layer**. Each encounter is attributed to one of six altitude layers as follows:

| *Layer* | *1* | *2* | *3* | *4* | *5* | *6* |
|---|---|---|---|---|---|---|
| *from* | | 2 300 ft | 5000 ft | 10 000 ft | 20 000 ft | 41 000 ft |
| *to* | 2 300 ft | 5 000 ft | 10 000 ft | 20 000 ft | 41 000 ft | |

The altitude layer of an encounter is determined by the average altitude of the two aircraft at closest approach.

**Approach angle.** The difference in the ground headings of the two aircraft at closest approach, with 180 degrees defined as head on and 0 degrees defined as parallel.

**Crossing encounter.** An encounter in which the altitude separation of the two aircraft exceeds 100 ft at the beginning and at the end of the encounter window, and the relative vertical position of two aircraft at the end of the encounter window is reversed from that at the beginning of the encounter window.

**Encounter.** For the purposes of defining the performance of the collision avoidance logic, an encounter consists of two simulated aircraft trajectories. The horizontal coordinates of the aircraft represent the actual position of the aircraft but the vertical coordinate represents an altimeter measurement of altitude.

**Encounter class**. Encounters are classified according to whether or not the aircraft are transitioning at the beginning and end of the encounter window, and whether or not the encounter is crossing.

**Encounter window**. The time interval [tca - 40 s, tca + 10 s].

**Horizontal miss distance (hmd).** The minimum horizontal separation observed in an encounter.

**Level aircraft.** An aircraft that is not transitioning.

**Original trajectory.** The original trajectory of an ACAS-equipped aircraft is that followed by the aircraft in the same encounter when it was not ACAS equipped.

**Original rate**. The original rate of an ACAS-equipped aircraft at any time is its altitude rate at the same time when it followed the original trajectory.

**Required rate.** For the standard pilot model, the required rate is that closest to the original rate consistent with the RA.

**tca.** Nominally, the time of closest approach. For encounters in the standard encounter model (4.4.2.6), a reference time for the construction of the encounter at which various parameters, including the vertical and horizontal separation (vmd and hmd), are specified.

**Transitioning aircraft.** An aircraft having an average vertical rate with a magnitude exceeding 400 feet per minute (ft/min), measured over some period of interest.

**Turn extent**. A heading difference defined as an aircraft's ground heading at the end of a turn minus its ground heading at the beginning of the turn.

**Vertical miss distance (vmd).** Notionally, the vertical separation at closest approach. For encounters in the standard encounter model (4.4.2.6), by construction the vertical separation at the time tca.

### 4.4.2 Conditions under which the requirements apply

**4.4.2.1** The following assumed conditions shall apply to the performance requirements specified in 4.4.3 and4.4.4:

a) range and bearing measurements and an altitude report are available for the intruder each cycle as long as it is within 14 NM, but not when the range exceeds 14 NM;

b) the errors in the range and bearing measurements conform to standard range and bearing error models (4.4.2.2 and4.4.2.3);

c) the intruder's altitude reports, which are its Mode C replies, are expressed in 100 ft quanta;

d) an altitude measurement that has not been quantized and is expressed with a precision of 1 ft or better is available for own aircraft;

e) errors in the altitude measurements for both aircraft are constant throughout any particular encounter;

f) the errors in the altitude measurements for both aircraft conform to a standard altimetry error model(4.4.2.4);

g) the pilot responses to RAs conform to a standard pilot model(4.4.2.5);

h) the aircraft operate in an airspace in which close encounters, including those in which ACAS generates an RA, conform to a standard encounter model(4.4.2.6);ACAS-equipped aircraft are not limited in their ability to perform the manoeuvres required by their RAs; and

i) as specified in4.4.2.7:

1) the intruder involved in each encounter is not equipped (4.4.2.7a));or

2) the intruder is ACAS-equipped but follows a trajectory identical to that in the unequipped encounter (4.4.2.7 b));or

3) the intruder is equipped with an ACAS having a collision avoidance logic identical to that of own ACAS (4.4.2.7c)).

**4.4.2.1.1** The performance of the collision avoidance logic shall not degrade abruptly as the statistical distribution of the altitude errors or the statistical distributions of the various parameters that characterize the standard encounter model or the response of pilots to the advisories are varied, when surveillance reports are not available on every cycle or when the quantization of the altitude measurements for the intruder is varied or the altitude measurements for own aircraft are quantized.

**4.4.2.2 Standard Range Error Model**

The errors in the simulated range measurements shall be taken from a Normal distribution with mean 0 ft and standard deviation 50 ft.

**4.4.2.3 Standard Bearing Error Model**

The errors in the simulated bearing measurements shall be taken from a Normal distribution with mean 0.0 degrees and standard deviation 10.0 degrees.

**4.4.2.4 Standard Altimetry Error Model**

**4.4.2.4.1** The errors in the simulated altitude measurements shall be assumed to be distributed as a Laplacian distribution with zero mean having probability density

$$p(e) = \frac{1}{2\lambda}\exp\left(-\frac{|e|}{\lambda}\right)$$

**4.4.2.4.2** The parameter λ required for the definition of the statistical distribution of altimeter error

for each aircraft shall have one of two values, $\lambda_1$ and $\lambda_2$, which depend on the altitude layer of the encounter as follows:

| *Layer* | *1* | | *2* | | *3* | | *4* | | *5* | | *6* | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | *m* | *ft* | *m* | *ft* | *m* | *ft* | *m* | *ft* | *m* | *ft* | *m* | *ft* |
| $\lambda_1$ | 10 | 35 | 11 | 38 | 13 | 43 | 17 | 58 | 22 | 72 | 28 | 94 |
| $\lambda_2$ | 18 | 60 | 18 | 60 | 21 | 69 | 26 | 87 | 30 | 101 | 30 | 101 |

**4.4.2.4.3** For an aircraft equipped with ACAS the value of λ shall be $\lambda_1$.

**4.4.2.4.4** For aircraft not equipped with ACAS, the value of λ shall be selected randomly using the following probabilities:

| Layer | 1 | 2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|---|
| Prob ($\lambda_1$) | 0.391 | 0.320 | 0.345 | 0.610 | 0.610 | 0.610 |
| Prob ($\lambda_2$) | 0.609 | 0.680 | 0.655 | 0.390 | 0.390 | 0.390 |

**4.4.2.5 Standard Pilot Model**

The standard pilot model used in the assessment of the performance of the collision avoidance logic shall be that:

a) any RA is complied with by accelerating to the required rate (if necessary) after an appropriate delay;

b) when the aircraft's current rate is the same as its original rate and the original rate complies with the RA, the aircraft continues at its original rate, which is not necessarily constant due to the possibility of acceleration in the original trajectory;

c) when the aircraft is complying with the RA, its current rate is the same as the original rate and the original rate changes and consequently becomes inconsistent with the RA, the aircraft continues to comply with the RA;

d) when an initial RA requires a change in altitude rate, the aircraft responds with an acceleration of 0.25 g after a delay of 5 s from the display of the RA;

e) when an RA is modified and the original rate complies with the modified RA, the aircraft returns to its original rate (if necessary) with the acceleration specified in g) after the delay specified in h);

f) when an RA is modified and the original rate does not comply with the modified RA, the aircraft responds to comply with the RA with the acceleration specified in g) after the delay specified in h);

g) the acceleration used when an RA is modified is 0.25 g unless the modified RA is a reversed sense RA or an increased rate RA in which case the acceleration is 0.35 g;

h) the delay used when an RA is modified is 2.5 s unless this results in the acceleration

starting earlier than 5 s from the initial RA in which case the acceleration starts 5 s from the initial RA; and

i) when an RA is cancelled, the aircraft returns to its original rate (if necessary) with an acceleration of 0.25 g after a delay of 2.5s.

#### 4.4.2.6 Standard Encounter Model

##### 4.4.2.6.1 Elements Of The Standard Encounter Model

**4.4.2.6.1.1** In order to calculate the effect of ACAS on the risk of collision (4.4.3) and the compatibility of ACAS with air traffic management (ATM) (4.4.4), sets of encounters shall be created for each of:

a) the two aircraft address orderings;

b) the six altitude layers;

c) nineteen encounter classes; and

d) nine or ten vmd bins as specified in4.4.2.6.2.4.

The results for these sets shall be combined using the relative weightings given in 4.4.2.6.2.

**4.4.2.6.1.1.1** Each set of encounters shall contain at least 500 independent, randomly generated encounters.

**4.4.2.6.1.1.2** The two aircraft trajectories in each encounter shall be constructed with the following randomly selected characteristics:

a) in the vertical plane:

1) a vmd from within the appropriate vmd bin;

2) a vertical rate for each aircraft at the beginning of the encounter window, $\dot{z}_1$ and at the end of the encounter window, $\dot{z}_2$;

3) a vertical acceleration; and

4) a start time for the vertical acceleration; and

b) and in the horizontal plane:

1) an hmd;

2) an approach angle;

3) a speed for each aircraft at closest approach;

4) a decision for each aircraft whether or not it turns;

5) the turn extent; the bank angle; and the turn end time;

6) a decision for each aircraft whether or not its speed changes; and

7) the magnitude of the speed change.

**4.4.2.6.1.3** Two models shall be used for the statistical distribution of hmd (4.4.2.6.4.1). For calculations of the effect of ACAS on the risk of collision (4.4.3), hmd shall be constrained to be less than 500 ft. For calculations of the compatibility of ACAS with ATM (4.4.4), hmd shall be selected from a larger range of values (4.4.2.6.4.1.2).

**4.4.2.6.2 Encounter Classes And Weights**

**4.4.2.6.2.1 Aircraft address**. Each aircraft shall be equally likely to have the higher aircraft address.

**4.4.2.6.2.2 Altitude layers**. The relative weights of the altitude layers shall be as follows:

| Layer | 1 | 2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|---|
| prob(layer) | 0.13 | 0.25 | 0.32 | 0.22 | 0.07 | 0.01 |

**4.4.2.6.2.3 Encounter classes**

**4.4.2.6.2.3.1** The encounters shall be classified according to whether the aircraft are level (L) or transitioning (T) at the beginning (before tca) and end (after tca) of the encounter window and whether or not the encounter is crossing, as follows:

| | Aircraft No.1``` | | Aircraft No.2 | | |
|---|---|---|---|---|---|
| Class | before tca | after tca | before tca | after tca | Crossing |
| 1 | L | L | T | T | yes |
| 2 | L | L | L | T | yes |
| 3 | L | L | T | L | yes |
| 4 | T | T | T | T | yes |
| 5 | L | T | T | T | yes |
| 6 | T | T | T | L | yes |
| 7 | L | T | L | T | yes |
| 8 | L | T | T | L | yes |
| 9 | T | L | T | L | yes |
| 10 | L | L | L | L | no |
| 11 | L | L | T | T | no |
| 12 | L | L | L | T | no |
| 13 | L | L | T | L | no |
| 14 | T | T | T | T | no |
| 15 | L | T | T | T | no |
| 16 | T | T | T | L | no |
| 17 | L | T | L | T | no |
| 18 | L | T | T | L | no |

| | | | | | |
|---|---|---|---|---|---|
| 19 | T | L | T | L | no |

**4.4.2.6.2.3.2** The relative weights of the encounter classes shall depend on layer as follows:

| | for calculating risk ratio | | for ATM compatibility | |
|---|---|---|---|---|
| Class | Layers 1-3 | Layers 4-6 | Layers 1-3 | Layers 4-6 |
| 1 | 0.00502 | 0.00319 | 0.06789 | 0.07802 |
| 2 | 0.00030 | 0.00018 | 0.00408 | 0.00440 |
| 3 | 0.00049 | 0.00009 | 0.00664 | 0.00220 |
| 4 | 0.00355 | 0.00270 | 0.04798 | 0.06593 |
| 5 | 0.00059 | 0.00022 | 0.00791 | 0.00549 |
| 6 | 0.00074 | 0.00018 | 0.00995 | 0.00440 |
| 7 | 0.00002 | 0.00003 | 0.00026 | 0.00082 |
| 8 | 0.00006 | 0.00003 | 0.00077 | 0.00082 |
| 9 | 0.00006 | 0.00003 | 0.00077 | 0.00082 |
| 10 | 0.36846 | 0.10693 | 0.31801 | 0.09011 |
| 11 | 0.26939 | 0.41990 | 0.23252 | 0.35386 |
| 12 | 0.06476 | 0.02217 | 0.05590 | 0.01868 |
| 13 | 0.07127 | 0.22038 | 0.06151 | 0.18571 |
| 14 | 0.13219 | 0.08476 | 0.11409 | 0.07143 |
| 15 | 0.02750 | 0.02869 | 0.02374 | 0.02418 |
| 16 | 0.03578 | 0.06781 | 0.03088 | 0.05714 |
| 17 | 0.00296 | 0.00098 | 0.00255 | 0.00082 |
| 18 | 0.00503 | 0.00522 | 0.00434 | 0.00440 |
| 19 | 0.01183 | 0.03651 | 0.01021 | 0.03077 |

#### 4.4.2.6.2.4 vmd bins

**4.4.2.6.2.4.1** The vmd of each encounter shall be taken from one of ten vmd bins for the non-crossing encounter classes, and from one of nine or ten vmd bins for the crossing encounter classes. Each vmd bin shall have an extent of 100 ft for calculating risk ratio, or an extent of 200 ft for calculating compatibility with ATM. The maximum vmd shall be 1 000 ft for calculating risk ratio, and 2 000 ft otherwise.

**4.4.2.6.2.4.2** For non-crossing encounter classes, the relative weights of the vmd bins shall be as follows:

| vmd bin | for calculating risk ratio | for ATM compatibility |
|---|---|---|
| 1 | 0.013 | 0.128 |
| 2 | 0.026 | 0.135 |
| 3 | 0.035 | 0.209 |
| 4 | 0.065 | 0.171 |
| 5 | 0.100 | 0.160 |
| 6 | 0.161 | 0.092 |
| 7 | 0.113 | 0.043 |
| 8 | 0.091 | 0.025 |
| 9 | 0.104 | 0.014 |

| | | |
|---|---|---|
| 10 | 0.091 | 0.009 |

**4.4.2.6.2.4.3** For the crossing classes, the relative weights of the vmd bins shall be as follows:

| vmd bin | for calculating risk ratio | for ATM compatibility |
|---|---|---|
| 1 | 0.0 | 0.064 |
| 2 | 0.026 | 0.144 |
| 3 | 0.036 | 0.224 |
| 4 | 0.066 | 0.183 |
| 5 | 0.102 | 0.171 |
| 6 | 0.164 | 0.098 |
| 7 | 0.115 | 0.046 |
| 8 | 0.093 | 0.027 |
| 9 | 0.106 | 0.015 |
| 10 | 0.093 | 0.010 |

### 4.4.2.6.3 Characteristics Of The Aircraft Trajectories In The Vertical Plane

**4.4.2.6.3.1 vmd.** The vmd for each encounter shall be selected randomly from a distribution that is uniform in the interval covered by the appropriate vmd bin.

#### 4.4.2.6.3.2 Vertical rate

**4.4.2.6.3.2.1** For each aircraft in each encounter, either the vertical rate shall be constant (ż) or the vertical trajectory shall be constructed so that the vertical rate at tca - 35 s is $ż_1$, and the vertical rate at tca + 5 s is $ż_2$. Each vertical rate, ż, $ż_1$ or $ż_2$, shall be determined by first selecting randomly an interval within which it lies and then selecting the precisse value from a distribution that is uniform over the interval selected.

**4.4.2.6.3.2.2** The intervals within which the vertical rates lie shall depend on whether the aircraft is level, i.e. marked “L” in 4.4.2.6.2.3.1, or transitioning, i.e. marked “T” in 4.4.2.6.2.3.1, and shall be as follows:

| L | T |
|---|---|
| [240 ft/min, 400ft/min] | [3 200 ft/min, 6 000ft/min] |
| [80 ft/min, 240ft/min] | [400 ft/min, 3 200ft/min] |
| [-80 ft/min, 80ft/min] | [-400 ft/min, 400ft/min] |
| [-240 ft/min, -80ft/min] | [-3 200 ft/min, -400ft/min] |
| [-400 ft/min, -240ft/min] | [-6 000 ft/min, -3 200ft/min] |

**4.4.2.6.3.2.3** For aircraft that are level over the entire encounter window, the vertical rate ż shall be constant. The probabilities for the intervals within which ż lies shall be as

follows:

| $\dot{z}$ (ft/min) | prob($\dot{z}$) |
|---|---|
| [240 ft/min, 400 ft/min] | 0.0382 |
| [80 ft/min, 240 ft/min] | 0.0989 |
| [–80 ft/min, 80 ft/min] | 0.7040 |
| [–240 ft/min, –80 ft/min] | 0.1198 |
| [–400 ft/min, –240 ft/min] | 0.0391 |

**4.4.2.6.3.2.4** For aircraft that are not level over the entire encounter window, the intervals for $\dot{z}_1$ and $\dot{z}_2$ shall be determined jointly by random selection using joint probabilities that depend on altitude layer and on whether the aircraft is transitioning at the beginning of the encounter window (Rate-to-Level), at the end of the encounter window (Level-to-Rate) or at both the beginning and the end (Rate-to- Rate). The joint probabilities for the vertical rate intervals shall be as follows:

for aircraft with Rate-to-Level trajectori

| $\dot{z}_2$ interval | joint probability of $\dot{z}_1$ and $\dot{z}_2$ intervals | | | | |
|---|---|---|---|---|---|
| [240 ft/min, 400 ft/min] | 0.0019 | 0.0169 | 0.0131 | 0.1554 | 0.0000 |
| [80 ft/min, 240 ft/min] | 0.0000 | 0.0187 | 0.0019 | 0.1086 | 0.0000 |
| [–80 ft/min, 80 ft/min] | 0.0037 | 0.1684 | 0.0094 | 0.1124 | 0.0075 |
| [–240 ft/min, –80 ft/min] | 0.0037 | 0.1461 | 0.0094 | 0.0243 | 0.0037 |
| [–400 ft/min, –240 ft/min] | 0.0000 | 0.1742 | 0.0094 | 0.0094 | 0.0019 |
| | –6 000 ft/min | –3 200 ft/min | –400 ft/min | 400 ft/min | 3 200 ft/min | 6 000 ft/min | $\dot{z}_1$ |

for aircraft with Rate-to-Level trajectories in layers 4 to 6,

| $\dot{z}_2$ interval | joint probability of $\dot{z}_1$ and $\dot{z}_2$ intervals | | | | |
|---|---|---|---|---|---|
| [240 ft/min, 400 ft/min] | 0.0105 | 0.0035 | 0.0000 | 0.1010 | 0.0105 |
| [80 ft/min, 240 ft/min] | 0.0035 | 0.0418 | 0.0035 | 0.1776 | 0.0279 |
| [–80 ft/min, 80 ft/min] | 0.0279 | 0.1219 | 0.0000 | 0.2403 | 0.0139 |
| [–240 ft/min, –80 ft/min] | 0.0035 | 0.0767 | 0.0000 | 0.0488 | 0.0105 |
| [–400 ft/min, –240 ft/min] | 0.0105 | 0.0453 | 0.0035 | 0.0174 | 0.0000 |
| | –6 000 ft/min | –3 200 ft/min | –400 ft/min | 400 ft/min | 3 200 ft/min | 6 000 ft/min | $\dot{z}_1$ |

for aircraft with Level-to-Rate trajectories in layers 1 to 3,

| $\dot{z}_2$ interval | joint probability of $\dot{z}_1$ and $\dot{z}_2$ intervals | | | | |
|---|---|---|---|---|---|
| [3 200 ft/min, 6 000 ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| [400 ft/min, 3 200 ft/min] | 0.0074 | 0.0273 | 0.0645 | 0.0720 | 0.1538 |
| [–400 ft/min, 400 ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| [–3 200 ft/min, –400 ft/min] | 0.2978 | 0.2084 | 0.1365 | 0.0273 | 0.0050 |
| [–6 000ft/min, –3 200ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| | –400 ft/min | –240 ft/min | –80 ft/min | 80 ft/min | 240 ft/min | 400 ft/min | $\dot{z}_1$ |

es in layers 1 to 3,

For a Rate-to-Rate track, if line $|\dot{z}_2 - \dot{z}_1| < 566$ ft/min then the track shall be constructed with a constant rate equal to $\dot{z}_1$.

for aircraft with Level-to-Rate trajectories in layers 4 to 6,

| $\dot{z}_2$ interval | joint probability of $\dot{z}_1$ and $\dot{z}_2$ intervals | | | | |
|---|---|---|---|---|---|
| [3 200 ft/min, 6 000 ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0192 |
| [400 ft/min, 3 200 ft/min] | 0.0000 | 0.0000 | 0.0962 | 0.0577 | 0.1154 |
| [–400 ft/min, 400 ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| [–3 200 ft/min, –400 ft/min] | 0.1346 | 0.2692 | 0.2308 | 0.0577 | 0.0192 |
| [–6 000 ft/min, –3 200 ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| | –400 ft/min | –240 ft/min | –80 ft/min | 80 ft/min | 240 ft/min | 400 ft/min | $\dot{z}_1$ |

for aircraft with Rate-to-Rate trajectories in layers 1 to 3,

| $\dot{z}_2$ interval | joint probability of $\dot{z}_1$ and $\dot{z}_2$ intervals | | | | |
|---|---|---|---|---|---|
| [3 200 ft/min, 6 000 ft/ min] | 0.0000 | 0.0000 | 0.0007 | 0.0095 | 0.0018 |
| [400 ft/min, 3 200 ft/min] | 0.0000 | 0.0018 | 0.0249 | 0.2882 | 0.0066 |
| [–400 ft/min, 400 ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| [–3 200 ft/min, –400 ft/min] | 0.0048 | 0.5970 | 0.0600 | 0.0029 | 0.0011 |
| [–6 000 ft/min, –3 200 ft/min] | 0.0000 | 0.0007 | 0.0000 | 0.0000 | 0.0000 |
| | –6 000 ft/min | –3 200 ft/min | –400 ft/min | 400 ft/min | 3 200 ft/min | 6 000 ft/min | $\dot{z}_1$ |

for aircraft with Rate-to-Rate trajectories in layers 4 to 6,

| $\dot{z}_2$ interval | joint probability of $\dot{z}_1$ and $\dot{z}_2$ intervals | | | | |
|---|---|---|---|---|---|
| [3 200 ft/min, 6 000 ft/ min] | 0.0014 | 0.0000 | 0.0028 | 0.0110 | 0.0069 |
| [400 ft/min, 3 200 ft/min] | 0.0028 | 0.0028 | 0.0179 | 0.4889 | 0.0523 |
| [–400 ft/min, 400 ft/min] | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| [–3 200 ft/min, –400 ft/min] | 0.0317 | 0.3029 | 0.0262 | 0.0152 | 0.0028 |
| [–6 000 ft/min, –3 200 ft/min] | 0.0110 | 0.0220 | 0.0014 | 0.0000 | 0.0000 |
| | –6 000 ft/min | –3 200 ft/min | –400 ft/min | 400 ft/min | 3 200 ft/min | 6 000 ft/min | $\dot{z}_1$ |

#### 4.4.2.6.3.3 Vertical acceleration

**4.4.2.6.3.3.1** Subject to 4.4.2.6.3.2.5, for aircraft that are not level over the entire encounter window, the rate shall be constant and equal to $\dot{z}_1$ over at least the interval [tca - 4-s, tca - 35 s] at the beginning of the encounter window, and shall be constant and equal to $\dot{z}_2$ over at least the interval [tca+5s,tca+10s] at the end of the encounter window. The vertical acceleration shall be constant in the intervening period.

**4.4.2.6.3.3.2** The vertical acceleration $(\ddot{z})$ shall be modelled as follows:

$$\ddot{z} = (A\dot{z}_2 - \dot{z}_1) + \varepsilon$$

where the parameter A is case-dependent as follows:

$A(s^{-1})$

| Case | Layers 1-3 | Layers 4-6 |
|---|---|---|
| Rate-to-Level | 0.071 | 0.059 |
| Level-to-Rate | 0.089 | 0.075 |
| Rate-to-Rate | 0.083 | 0.072 |

and the error $\varepsilon$ is selected randomly using the following probability density:

$$p(\varepsilon) = \frac{1}{2\mu}\exp\left(-\frac{|\varepsilon|}{\mu}\right)$$

where $\mu = 0.3$ ft $s^{-2}$.

**4.4.2.6.3.4 Acceleration start time**. The acceleration start time shall be distributed uniformly in the time interval [tca - 35 s, tca - 5 s] and shall be such that $\dot{z}_2$ is achieved no later than tca + 5s.

### 4.4.2.6.4 Characteristics Of The Aircraft Trajectories In The Horizontal Plane

#### 4.4.2.6.4.1 Horizontal miss distance

**4.4.2.6.4.1.1** For calculations of the effect of ACAS on the risk of collision (4.4.3), hmd shall be uniformly distributed in the range [0, 500ft].

**4.4.2.6.4.1.2** For calculations concerning the compatibility of ACAS with ATM (4.4.4), hmd shall be distributed so that the values of hmd have the following cumulative probabilities:

| | Cumulative probability | | | cumulative probability | |
|---|---|---|---|---|---|
| hmd (ft) | Layers 1-3 | Layers 4-6 | hmd (ft) | Layers 1-3 | Layers 4-6 |
| 0 | 0.000 | 0.000 | 17013 | 0.999 | 0.868 |
| 1215 | 0.152 | 0.125 | 18228 | 1.000 | 0.897 |
| 2430 | 0.306 | 0.195 | 19443 | | 0.916 |
| 3646 | 0.482 | 0.260 | 20659 | | 0.927 |
| 4860 | 0.631 | 0.322 | 21874 | | 0.939 |
| 6076 | 0.754 | 0.398 | 23089 | | 0.946 |
| 7921 | 0.859 | 0.469 | 24304 | | 0.952 |
| 8506 | 0.919 | 0.558 | 25520 | | 0.965 |
| 9722 | 0.954 | 0.624 | 26735 | | 0.983 |
| 10937 | 0.972 | 0.692 | 27950 | | 0.993 |
| 12152 | 0.982 | 0.753 | 29165 | | 0.996 |
| 13367 | 0.993 | 0.801 | 30381 | | 0.999 |
| 14582 | 0.998 | 0.821 | 31596 | | 1.000 |
| 15798 | 0.999 | 0.848 | | | |

**4.4.2.6.4.2 Approach angle.** The cumulative distribution for the horizontal approach angle shall be as follows:

| *approach* | *cumulative probability* | | *approach* | *cumulative probability* | |
|---|---|---|---|---|---|
| *angle (deg.)* | *Layers 1-3* | *Layers 4-6* | *angle (deg.)* | *Layers 1-3* | *Layers 4-6* |
| 0 | 0.00 | 0.00 | 100 | 0.38 | 0.28 |
| 10 | 0.14 | 0.05 | 110 | 0.43 | 0.31 |
| 20 | 0.17 | 0.06 | 120 | 0.49 | 0.35 |
| 30 | 0.18 | 0.08 | 130 | 0.55 | 0.43 |
| 40 | 0.19 | 0.08 | 140 | 0.62 | 0.50 |
| 50 | 0.21 | 0.10 | 150 | 0.71 | 0.59 |
| 60 | 0.23 | 0.13 | 160 | 0.79 | 0.66 |
| 70 | 0.25 | 0.14 | 170 | 0.88 | 0.79 |
| 80 | 0.28 | 0.19 | 180 | 1.00 | 1.00 |
| 90 | 0.32 | 0.22 | | | |

**4.4.2.6.4.3 Aircraft speed.** The cumulative distribution for each aircraft's horizontal ground speed at closest approach shall be as follows:

| Ground speed(kt) | cumulative probability Layers1-3 | Layers4-6 | ground speed(kt) | cumulative probability Layers 1-3 | Layers4-6 |
|---|---|---|---|---|---|
| 45 | 0.000 | | 325 | 0.977 | 0.528 |
| 50 | 0.005 | | 350 | 0.988 | 0.602 |
| 75 | 0.024 | 0.000 | 375 | 0.997 | 0.692 |
| 100 | 0.139 | 0.005 | 400 | 0.998 | 0.813 |
| 125 | 0.314 | 0.034 | 425 | 0.999 | 0.883 |
| 150 | 0.486 | 0.064 | 450 | 1.000 | 0.940 |
| 175 | 0.616 | 0.116 | 475 | 0.972 | |
| 200 | 0.700 | 0.171 | 500 | 0.987 | |
| 225 | 0.758 | 0.211 | 525 | 0.993 | |
| 250 | 0.821 | 0.294 | 550 | 0.998 | |
| 275 | 0.895 | 0.361 | 575 | 0.999 | |
| 300 | 0.949 | 0.427 | 600 | 1.000 | |

**4.4.2.6.4.4 Horizontal manoeuvre probabilities.** For each aircraft in each encounter, the probability of a turn, the probability of a speed change given a turn, and the probability of a speed change given no turn shall be as follows:

| Layer | Prob(turn) | Prob(speed change) given a turn | Prob(speed change) given no turn |
|---|---|---|---|
| 1 | 0.31 | 0.20 | 0.50 |
| 2 | 0.29 | 0.20 | 0.25 |
| 3 | 0.22 | 0.10 | 0.15 |
| 4, 5, 6 | 0.16 | 0.05 | 0.10 |

**4.4.2.6.4.4.1** Given a speed change, the probability of a speed increase shall be 0.5 and the probability of a speed decrease shall be0.5.

**4.4.2.6.4.5 Turn extent.** The cumulative distribution for the extent of any turn shall be as follows:

| Turn extent (deg.) | Cumulative probability Layers 1-3 | Layers 4-6 |
|---|---|---|
| 15 | 0.00 | 0.00 |
| 30 | 0.43 | 0.58 |
| 60 | 0.75 | 0.90 |
| 90 | 0.88 | 0.97 |
| 120 | 0.95 | 0.99 |
| 150 | 0.98 | 1.00 |
| 180 | 0.99 | |
| 210 | 1.00 | |

**4.4.2.6.4.5.1** The direction of the turn shall be random, with the probability of a left turn being 0.5 and the probability of a right turn being 0.5.

**4.4.2.6.4.6** **Bank angle.** An aircraft's bank angle during a turn shall not be less than 15 degrees. The probability that it equals 15 degrees shall be 0.79 in layers 1-3 and 0.54 in layers 4-5. The cumulative distribution for larger bank angles shall be as follows:

| | cumulative probability | |
|---|---|---|
| Bank angle(deg.) | Layers1-3 | Layers4-6 |
| 15 | 0.79 | 0.54 |
| 25 | 0.96 | 0.82 |
| 35 | 0.99 | 0.98 |
| 50 | 1.00 | 1.00 |

**4.4.2.6.4.7** **Turn end time.** The cumulative distribution for each aircraft's turn end time shall be as follows:

| Turn endtime | cumulative probability | |
|---|---|---|
| (seconds before tca) | Layers1-3 | Layers4-6 |
| 0 | 0.42 | 0.28 |
| 5 | 0.64 | 0.65 |
| 10 | 0.77 | 0.76 |
| 15 | 0.86 | 0.85 |
| 20 | 0.92 | 0.94 |
| 25 | 0.98 | 0.99 |
| 30 | 1.00 | 1.00 |

**4.4.2.6.4.8** **Speed change.** A constant acceleration or deceleration shall be randomly selected for each aircraft performing a speed change in a given encounter, and shall be appliedforthedurationoftheencounter.Accelerationsshallbeuniformlydistributedbetweenbetweenbetweenbetween 2 kt/s and 6 kt/s. Decelerations shall be uniformly distributed between 1 kt/s and 3kt/s.

**4.4.2.7 ACAS Equipage Of The Intruder**

The performance requirements specified in 4.4.3 and 4.4.4 each apply to three distinct situations in which the following conditions concerning the intruder's ACAS and trajectory shall apply:

a) where the intruder involved in each encounter is not equipped (4.4.2.1 j) 1)), it follows a trajectory identical to that which it follows when own aircraft is not equipped;

b) where the intruder is ACAS-equipped but follows a trajectory identical to that in the unequipped encounter (4.4.2.1 j)2)):

1) it follows the identical trajectory regardless of whether or not there is an RA;

2) the intruder ACAS generates an RA and transmits an RAC that is received immediately after any RA is first announced to the pilot of own aircraft;

3) the sense of the RAC generated by the intruder ACAS and transmitted to own aircraft is opposite to the sense of the first RAC selected and transmitted to the intruder by own aircraft(4.3.6.1.3);

4) the RAC transmitted by the intruder is received by own aircraft; and

5) the requirements apply both when own aircraft has the lower aircraft address and when the intruder aircraft has the lower aircraft address; and

c) where the intruder is equipped with an ACAS having a collision avoidance logic identical to that of own ACAS (4.4.2.1 j)3)):

1) the conditions relating to the performance of own aircraft, ACAS and pilot apply equally to the intruder aircraft, ACAS and pilot;

2) RACs transmitted by one aircraft are received by the other; and

3) the requirements apply both when own aircraft has the lower aircraft address and when the intruder aircraft has the lower aircraft address.

#### 4.4.2.8 Compatibility Between Different Collision Avoidance Logic Designs

When considering alternative collision avoidance logic designs, certification authorities should verify that:

a) the performances of the alternative design are acceptable in encounters involving ACAS units that use existing designs; and

b) the performances of the existing designs are not degraded by the use of the alternative design.

### 4.4.3 Reduction in the risk of collision

Under the conditions of 4.4.2, the collision avoidance logic shall be such that the expected number of collisions is reduced to the following proportions of the number expected in the absence of ACAS:

a) when the intruder is not ACAS equipped 0.18;

b) when the intruder is equipped but does not respond 0.32; and

c) when the intruder is equipped and responds 0.04.

### 4.4.4 Compatibility with air traffic management (ATM)

#### 4.4.4.1 Nuisance Alert Rate

**4.4.4.1.1** Under the conditions of 4.4.2, the collision avoidance logic shall be such that the proportion of RAs which are a "nuisance" (4.4.4.1.2) shall not exceed:

.06 when own aircraft's vertical rate at the time the RA is first issued is less than 400 ft/min; or

.08 when own aircraft's vertical rate at the time the RA is first issued exceeds 400 ft/min.

**4.4.4.1.2** An RA shall be considered a "nuisance" for the purposes of 4.4.4.1.1 unless, at some point in the encounter in the absence of ACAS, the horizontal separation and the vertical separation are simultaneously less than the following values:

| | horizontal separation | vertical separation |
|---|---|---|
| above FL100 | 2.0 NM | 750 ft |
| below FL100 | 1.2 NM | 750 ft |

#### 4.4.4.2 Compatible Sense Selection

Under the conditions of 4.4.2, the collision avoidance logic shall be such that the proportion of encounters in which following the RA results in an altitude separation at closest approach with the opposite sign to that occurring in the absence of ACAS shall not exceed the following values:

a) when the intruder is not ACAS equipped.08;
b) when the intruder is equipped but does not respond .08;and
c) when the intruder is equipped and responds.12.

#### 4.4.4.3 Deviations Caused By ACAS

**4.4.4.3.1** Under the conditions of 4.4.2, the collision avoidance logic shall be such that the number of RAs resulting in "deviations" (4.4.4.3.2) greater than the values indicated shall not exceed the following proportions of the total number of RAs:

| | when own aircraft's vertical rate at the time the RA is first issued- | |
|---|---|---|
| | is less than 400ft/min | exceeds 400ft/min |
| when the intruder is not ACAS equipped, | | |
| for deviations >300ft | .15 | .23 |
| for deviations >600ft | .04 | .13 |
| for deviations >1000ft | .01 | .07 |
| when the intruder is equipped but does not respond, | | |
| for deviations >300ft | .23 | .35 |
| for deviations >600ft | .06 | .16 |
| for deviations >1000ft | .02 | .07 |
| when the intruder is equipped and responds, | | |
| for deviations >300ft | .11 | .23 |
| for deviations >600ft | .02 | .12 |
| for deviations >1000ft | .01 | .06 |

**4.4.4.3.2** For the purposes of 4.4.4.3.1, the "deviation" of the equipped aircraft from the original trajectory shall be measured in the interval from the time at which the RA is first issued until the time at which, following cancellation of the RA, the equipped aircraft has recovered its original altitude rate. The deviation shall be calculated as the largest altitude difference at any time in this interval between the trajectory followed by the equipped aircraft when responding to its RA and its original trajectory.

### 4.4.5 Relative value of conflicting objectives

The collision avoidance logic should be such as to reduce as much as practicable the risk of collision (measured as defined in 4.4.3) and limit as much as practicable the disruption to ATM (measured as defined in4.4.4).

## 4.5 ACAS Use of Extended Squitter

### 4.5.1 ACAS hybrid surveillance using extended squitter position data

*Note.— Surveillance protocols defined in this section are for ACAS hybrid surveillance, and surveillance protocols for ACAS not equipped for hybrid surveillance are defined in 4.3.7.1.*

#### 4.5.1.1 Definitions

**Active surveillance.** The process of tracking an intruder by using the information gained from the replies to own ACAS interrogations.

**Extended hybrid surveillance**. The process of using qualified ADS-B airborne position messages via 1 090 MHz extended squitter without validating 1090 extended squitter data for the track by ACAS active interrogations.
**Hybrid surveillance**. The process of using a combination of active surveillance and passive surveillance with validated data to update an ACAS track in order to preserve ACAS independence.

**Initial acquisition.** The process of starting the formation of a new track upon receipt of a squitter from a Mode S aircraft for which there is no track by making an active interrogation.

**Validation.** The process of verifying the relative position of an intruder using passive information via 1090 MHz extended squitter by comparing it to the relative position obtained by ACAS active interrogation.

**Passive surveillance**. The process of tracking another aircraft without interrogating it, by using the other aircraft's extended squitter. ACAS uses the information obtained via 1090 MHz extended squitter to monitor the need for active surveillance, but not for any other purpose. Passive surveillance applies to both hybrid and extended hybrid surveillance.

**4.5.1.2** An ACAS equipped to receive extended squitter airborne position messages for passive surveillance of non-threatening intruders shall utilize this passive position information in the following manner.

**4.5.1.3 Passive Surveillance**

**4.5.1.3.1** ***EXTENDED HYBRID SURVEILLANCE***

**4.5.1.3.1.1** Systems using extended hybrid surveillance mode shall establish a track in such a way that no interrogations are performed, i.e. acquiring the track through exclusive use of ADS-B extended squitter, when the following conditions are met:

a) Own aircraft position data meets the following minimum level of quality:
1) own aircraft horizontal position uncertainty (95 per cent) is < 0.1 NM; and

2) own aircraft horizontal position integrity shall be such that the probability of an undetected position error, which is greater than 0.6 NM radius, is less than 1 x 10-7.

b) The received signal strength is equal or less than -68 dBm +/-2 dB (extended hybrid surveillance minimum triggering level), or own aircraft is operating on the surface; and

c) The intruder data quality meets the following minimum requirements:
1) the ADS-B version number ≥ 2;
2) the reported NIC ≥ 6 ( < 0.6 NM);
3) the reported NACp ≥ 7 (< 0.1 NM);
4) the reported SIL = 3;
5) the reported SDA = 2 or 3; and
6)the barometric altitude is valid.

**4.5.1.1.2** The system shall not use ADS-rebroadcast (ADS-R) and TIS-B data to passively acquire an aircraft.

*Note 1.— ADS-R is described in the* Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871).*

*Note 2.— The signal level strength cannot be applied to ADS-R and TIS-B data.*

**4.5.1.1.3** A track maintained under extended hybrid surveillance mode shall transition to a track maintained under active surveillance mode if range and altitude of hybrid threat criteria are met.

Note.— Information concerning range and altitude hybrid threat criteria can be found in RTCA DO-300A Change 1/EUROCAE ED-221A – Minimum Operational Performance Standards (MOPS) for Traffic Alert and Collision Avoidance System II (TCAS II) Hybrid Surveillance.

**4.5.1.1.4** A track under extended hybrid surveillance mode shall transition to a track under hybrid surveillance mode if:

1) The signal indicates a high probability to be in close proximity, i.e. signal > Extended Hybrid Surveillance MTL, except when operating on the airport surface; or
2) Intruder data or own data quality does not meet minimum requirements.

**4.5.1.1.5** **Validation**. To validate the position of an intruder reported by extended squitter and not meeting the criteria for extended hybrid surveillance mode, ACAS shall determine the relative range and bearing as computed from the position and geographical heading of of own aircraft and the intruder's position as reported in the extended squitter. This derived range and relative bearing and the altitude reported in the squitter shall be compared to the range, relative bearing and altitude determined by active ACAS interrogation requiring a short reply from the aircraft. Differences between the derived and measured range and relative bearing and the squitter and reply altitude shall be computed and used in tests to determine whether the extended squitter data is valid. If these tests are satisfied the passive position shall be considered to be validated and the track shall be maintained on passive data unless it is a near threat as describedin4.5.1.4. If any of these validation tests fail, active surveillance shall be used to track the intruder.

*Note.— Suitable tests for validating extended squitter data information for the purposes of ACAS hybrid surveillance can be found in RTCA DO-300A Change 1/EUROCAE ED-221A* – Minimum Operational Performance Standards (MOPS) for Traffic Alert and Collision Avoidance System II (TCAS II) Hybrid Surveillance..

**4.5.1.1.6** **Supplementary active interrogations**. In order to ensure that an intruder's track is

updated at least as frequently as required in the absence of extended squitter data (4.3.7.1.2.2), each time a track is updated using squitter information the time at which an active interrogation would next be required shall be calculated. An active interrogation shall be made at that time if a further squitter has not been received before the interrogation is due.

**4.5.1.2** ***Near threat.*** An intruder shall be tracked under active surveillance if it is a near threat, as determined by separate tests on the range and altitude of the aircraft. These tests shall be such that an intruder is considered a near threat before it becomes a potential threat, and thus triggers a traffic advisory as described in 4.3.3. These tests shall be performed once per second. All near threats, potential threats and threats shall be tracked using active surveillance.

*Note.— Suitable tests for determining that an intruder is a near threat can be found in RTCA DO-300A Change 1/EUROCAE ED-221A – Minimum Operational Performance Standards (MOPS) for Traffic Alert and Collision Avoidance System II (TCAS II) Hybrid Surveillance.*

**4.5.1.3** **Revalidation and monitoring**. If an aircraft is being tracked using passive surveillance and if criteria for extended hybrid surveillance mode are not met, periodic active interrogations shall be performed to validate and monitor the extended squitter data as required in 4.5.1.3.2. The rates of revalidation shall be between once per minute and once per ten seconds

The tests required in 4.5.1.3.1 shall be performed for each interrogation, and active surveillance shall be used to track the intruder if these revalidation tests fail.

*Note.— More information about criteria of revalidation rate can be found in RTCA DO-300A Change 1/EUROCAE ED-221A* – Minimum Operational Performance Standards (MOPS) for Traffic Alert and Collision Avoidance System II (TCAS II) Hybrid Surveillance.

**4.5.1.4** **Full active surveillance.** If the following condition is met for a track being updated via passive surveillance data:

a) $|a| \leq 10\,000$ ft and both;

b) $|a| \leq 3\,000$ ft or $|a - 3\,000 \text{ ft}| / |\dot{a}| \leq 60$ s; and

c) $r \leq 3$ NM or $(r - 3 \text{ NM}) / |\dot{r}| \leq 60$ s;

where: $a$ = intruder altitude separation in ft
$\dot{a}$ = altitude rate estimate in ft/s
$r$ = intruder slant range in NM
$\dot{r}$ = range rate estimate in NM/s

the aircraft shall be declared an active track and shall be updated on active range measurements once per second for as long as the above condition is met.

**4.5.1.4.1** All near threats, potential threats and threats shall be tracked using active Surveillance.

**4.5.1.4.2** Adequate protection against residual ADS-B position data shall be provided in track state computation when transitioning from passive to active surveillance, in order to avoid unnecessary advisories during such transitions

*Note.— A suitable means of protection can be found in* RTCA DO-300 Change 2 *and* RTCA DO-300A Change 1/EUROCAE ED-221A – Minimum Operational Performance Standards (MOPS) for Traffic Alert and Collision Avoidance System II (TCAS II) Hybrid Surveillance, *Section 2.2.6.2.*

**4.5.1.4.3** A track under active surveillance shall transition to passive surveillance if it is neither a near threat, potential threat nor a threat. The tests used to determine it is no longer a near threat shall be similar to those used in 4.5.1.4 but with larger thresholds in order to have hysteresis which prevents the possibility of frequent transitions between active and passive surveillance.

**4.5.1.4.4**

*Note.— Suitable tests for determining that an intruder is no longer a near threat can be found in RTCA DO-300A Change 1/EUROCAE ED-221A* – Minimum Operational Performance Standards (MOPS) for Traffic Alert and Collision Avoidance System II (TCAS II) Hybrid Surveillance*.*

### 4.5.2 ACAS operation with an improved receiver MTL

**4.5.2.1** An ACAS operating with a receiver having a MTL more sensitive than -74 dBm shall implement the capabilities specified in the following paragraphs.

**4.5.2.2** **Dual minimum triggering levels.** The ACAS receiver shall be capable of setting an indication for each squitter reception as to whether the reply would have been detected by an ACAS operating with a conventional MTL (-74 dBm). Squitter receptions received at the conventional MTL shall be passed to the ACAS surveillance function for further processing. Squitter receptions that do not meet this condition shall be not be passed to the ACAS surveillance function.

**4.5.2.3** **Dual or re-triggerable reply processor.** The ACAS Mode S reply processing function shall:

a) use separate reply processors for Mode S reply formats received at or above the conventional MTL and a separate reply processor for Mode S reply formats received below the conventional MTL; or,

b) use a Mode S reply processor that will re-trigger if it detects a Mode S preamble that is 2 to 3 dB stronger than the reply that is currently being processed.

## 5 MODE S EXTENDED SQUITTER

*Note 1.—A functional model of Mode S extended squitter systems supporting ADS-B and/or TIS- B is depicted in Figure 5-1.*

*Note 2.—Airborne systems transmit ADS-B messages (ADS-B OUT) and may also receive ADS- B and TIS-B messages (ADS-B IN and TIS-B IN). Ground systems (i.e. ground stations) transmit TIS-B (as an option) and receive ADS-B messages.*

*Note 3.—Although not explicitly depicted in the functional model presented in Figure 5-1, extended squitter*

*systems installed on aerodrome surface vehicles or fixed obstacles may transmit ADS-B messages (ADS-B OUT).*

## 5.1 MODE S EXTENDED SQUITTER TRANSMITTING SYSTEM CHARACTERISTICS

*Note.—Many of the requirements associated with the transmission of Mode S extended squitter are included in Chapters 2 through 5 for Mode S transponder and non-transponder devices using the message formats defined in the* Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871). The provisions presented within the following subsections are focused on requirements applicable to specific classes of airborne and ground transmitting systems that are supporting the applications of ADS-B and TIS-B.*

### 5.1.1 ADS-B out requirements

**5.1.1.1** Aircraft, surface vehicles and fixed obstacles supporting an ADS-B capability shall incorporate the ADS-B message generation function and the ADS-B message exchange function (transmit) as depicted in Figure5-1.

**5.1.1.1.1** ADS-B transmissions from aircraft shall be in accordance with 3.1.2.8.6.3 for transponder-based systems or 3.1.2.8.7.3.2 for non-transponder-based systems

***5.1.1.1.2*** Recommendation.— *Extended squitter transmitting equipment should use formats and protocols of the latest version available.*

*Note 1.— The data formats and protocols for messages transferred via extended squitter are specified in the* Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871).*

5.1.1.1 **Extended squitter ADS-B transmission requirements.** Mode S extended squitter transmitting equipment shall be classified according to the unit's intended range capability and the set of parameters that it is capable of transmitting consistent with the following definition of general equipment classes and the specific equipment classes defined in Tables 5-1 and5-2:

*a)* Class A extended squitter airborne systems support an interactive capability incorporating both an extended squitter transmission capability (i.e. ADS-B OUT) with a complementary extended squitter reception capability (i.e. ADS-B IN) in support of onboard ADS-B applications;

*b)* Class B extended squitter systems provide a transmission only (i.e. ADS-B OUT without an extended squitter reception capability) for use on aircraft, surface vehicles, or fixed obstructions; and

*c)* Class C extended squitter systems have only a reception capability and thus have no transmission requirements.

5.1.2 **Intentionally left blank**

5.1.3 **ADS-B OUT requirements for surface vehicles**

5.1.3.1 All surface vehicles supporting any versions of extended squitter ADS-B capability shall transmit extended squitter messages as per 5.1.1.2.

5.1.3.2 *Extended squitter version 2 or later required system performance*. The position source and equipment installed in surface vehicles to transmit extended squitter version 2 or later messages shall support the following performance characteristics:

**5.1.3.2.1** The NACP for the navigation position data shall be greater than or equal to 9, a 95 per cent accuracy bound on horizontal position less than 30 metres.

*Note.— NACP is calculated based on satellite performance.*

**5.1.3.2.2** The NACV for the navigation velocity data shall be greater than or equal to 2, a velocity error less than 3 metres per second.

**5.1.3.2.3** The NACP and NACV minimum values shall be met at a minimum availability of 95 per cent.

**5.1.3.2.4** The system design assurance parameter shall be equal to 1 or more, which defines the probability of a failure resulting in transmission of false or misleading information to be less than or equal to 1x10-3.

*Note 1.— These minimum performance requirements for extended squitter version 2 or later transmitted position data from surface vehicles are necessary to support aircraft-based alerting applications.*
*Note 2.— Guidance material for implementation of surface vehicle ADS-B systems is contained in the* Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871)*.

## 5.2 MODE S EXTENDED SQUITTER RECEIVING SYSTEM CHARACTERISTICS (ADS-B IN AND TIS-B IN)

*Note 1.— The paragraphs herein describe the required capabilities for 1 090 MHz receivers used for the reception of Mode S extended squitter transmissions that convey ADS-B and/or TIS-B messages. Airborne receiving systems support ADS-B and TIS-B reception while ground receiving systems support only ADS-B reception.*

*Note 2.— Detailed technical provisions for Mode S extended squitter receivers can be found within RTCA DO-260C/EUROCAE ED-102B, "Minimum Operational Performance Standards for 1 090 MHz Extended Squitter Automatic Dependent Surveillance - Broadcast (ADS-B) and Traffic Information Services - Broadcast (TIS-B)."*

### 5.2.1 Mode S extended squitter receiving system functional requirements

**5.2.1.1** Mode S extended squitter receiving systems shall perform the message exchange function (receive) and the report assembler function.

*Note.— The extended squitter receiving system receives ADS-B Mode S extended squitter messages and outputs ADS-B reports to client applications. Airborne receiving systems also receive TIS-B extended squitter messages and output TIS-B reports to client applications. This functional model (shown in Figure 5-1) depicts both airborne and ground 1 090 MHz ADS-B receiving systems.*

**5.2.1.2 Mode S extended squitter receiver classes.** The required functionality and performance characteristics for the Mode S extended squitter receiving system will vary depending on the ADS-B and TIS-B client applications to be supported and the operational use of the system. Airborne Mode S extended squitter receivers shall be

consistent with the definition of receiving system classes shown in Table5-3.

*Note.— Different equipment classes of Mode S extended squitter installations are possible. The characteristics of the receiver associated with a given equipment class are intended to be appropriate to support the required level of operational capability. Equipment classes A0 through A3 are applicable to those Mode S extended airborne installations that include a Mode S extended squitter transmission (ADS-OUT) and reception (ADS-B IN) capability. Equipment classes B0 through B3 are applicable to Mode S extended installations with only a transmission (ADS-BOUT) capability and includes equipment classes applicable to airborne, surface vehicles and fixed obstructions. Equipment classes C1 through C3 are applicable to Mode S extended squitter ground receiving systems.*

### 5.2.2 Message exchange function

**5.2.2.1** The message exchange function shall include the 1 090 MHz receiving antenna and the radio equipment (receiver/demodulator/decoder/data buffer) sub-functions.

**5.2.2.2 Message exchange functional characteristics.** The airborne Mode S extended squitter receiving system shall support the reception and decoding of all extended squitter messages as listed in Table 5-3. The ground ADS-B extended squitter receiving system shall, as a minimum, support the reception and decoding of all of the extended squitter message types that convey information needed to support the generation of the ADS-B reports of the types required by the client ATM ground applications.

**5.2.2.3 Required message reception performance.** The airborne Mode S extended squitter receiver/demodulation/ decoder shall employ the reception techniques and have a receiver minimum trigger threshold level (MTL) as listed in Table 5-3 as a function of the airborne receiver class. The reception technique and MTL for extended squitter ground receiver shall be selected to provide the reception performance (i.e. range and update rates) as required by the client ATM ground applications.

**5.2.2.4 Enhanced reception techniques.** Class A1, A2 and A3 airborne receiving systems shall include the following features to provide improved probability of Mode S extended squitter reception in the presence of multiple overlapping Mode A/C fruit and/or in the presence of an overlapping stronger Mode S fruit, as compared to the performance of the standard reception technique required for Class A0 airborne receiving systems:

a) Improved Mode S extended squitter preamble detection.
b) Enhanced error detection and correction.
c) Enhanced bit and confidence declaration techniques applied to the airborne receiver classes as shown below:
    1) ClassA1-Performance equivalent to or better than the use of the “Centre Amplitude” technique.
    2) Class A2 - Performance equivalent to or better than the use of the “Multiple Amplitude Samples” baseline technique, where at least 8 samples are taken for each Mode S bit position and are used in the decision process.
    3) Class A3 - Performance equivalent to or better than the use of the “Multiple Amplitude Samples” baseline technique, where at least 10 samples are taken for each Mode S bit position and are used in the decision process.
d) Advanced range receiver techniques for Class A3 receivers, which includes optional additional performance enhancements from the use of multiple receivers and antenna

sectorization

*Note 1.— The above enhanced reception techniques are as defined in RTCA DO- 260B/EUROCAE ED-102B, Appendix I.*

*Note 2.— The performance provided for each of the above enhanced reception techniques when used in a high fruit environment (i.e. with multiple overlapping Mode A/C fruit) is expected to be at least equivalent to that provided by the use of the techniques described in RTCA DO- 260C/EUROCAE ED-102B, Appendix I.*

*Note 3.— It is considered appropriate for ground extended squitter receiving systems to employ the enhanced reception techniques equivalent to those specified for airborne Class A2 or A3 receiving systems.*

### 5.2.3 Report assembler function

**5.2.3.1** The report assembler function shall include the message decoding, report assembly, and output interface sub-functions.

**5.2.3.2** When an extended squitter message is received, the message shall be decoded and the applicable ADS-B report(s) of the types defined in 5.2.3.3 shall be generated within 0.5 seconds.

*Note 1.— Two configurations of extended squitter airborne receiving systems, which include the reception portion of the ADS-B message exchange function and the ADS-B/TIS-B report assembly function, are allowed:*

*a) Type I extended squitter receiving systems receive ADS-B and TIS-B messages and produce application-specific subsets of ADS-B and TIS-B reports. Type I extended squitter receiving systems are customized to the particular client applications using ADS-B and TIS-B reports. Type I extended squitter receiving systems may additionally be controlled by an external entity to produce installation- defined subsets of the reports that those systems are capable of producing.*

*b) Type II extended squitter receiving systems receive ADS-B and TIS-B messages and are capable of producing complete ADS-B and TIS-B reports in accordance with the equipment class. Type II extended squitter receiving systems may be controlled by an external entity to produce installation-defined subsets of the reports that those systems are capable of producing.*

*Note 2.— Extended squitter ground receiving systems receive ADS-B messages and produce either application-specific subsets or complete ADS-B reports based on the needs of the ground service provider, including the client applications to be supported. . Ground receiving systems may also generate ADS-B Wx Pilot Reports (PIREPs) based upon ADS-B Wx PIREP messages. Additional information on ADS-B Wx PIREP messages can be found in Doc 9871.*

*Note 3.— The extended squitter message reception function may be physically partitioned into hardware separate from those that implement the report assembly function.*

#### 5.2.3.3 ADS-B REPORT TYPES

*Note 1.— The ADS-B report refers to the restructuring of ADS-B message data received from Mode S extended squitter broadcasts into various reports that can be used directly by a set of client applications. Five ADS-B report types are defined by the following subparagraphs and additional two ADS-B report types (ADS-B Wx Air*

*Report (AIREP)and Aircraft State Report) are defined in Doc 9871 for output to client applications. Additional information on the ADS-B report contents and the applicable mapping from extended squitter messages to ADS-B reports can be found in RTCA DO-260C / EUROCAE ED-102B.*

*Note 2.*— The ADS-B Wx Air Report is an optional report that will be generated when weather information is received in ADS-B Wx subtype 1 and 2 messages along with additional weather information received in aircraft status subtype 1 extended squitter messages. The aircraft state report is an optional report that will be generated when information is received in ADS-B Wx subtype 0 messages. The ADS B Wx subtype 0, 1 and 2 messages are defined in Doc 9871. Specific requirements for the customization of this type of report may vary according to the needs of the client applications of each participant.

**5.2.3.3.1 State vector report.** The state vector report shall contain time of applicability, information about an airborne or vehicle's current kinematic state (e.g. position, velocity), as well as a measure of the integrity of the navigation data, based on information received in airborne or suface position, airborne velocity, identification and category and aircraft operational status extended squitter messages. Since separate messages are used for position and velocity, the time of applicability shall be reported individually for the position related report parameters and the velocity related report parameters. Also, the state vector report shall include a time of applicability for the estimated position and/or estimated velocity information (i.e. not based on a message with updated position or velocity information) when such estimated position and/or velocity information is included in the state vector report.

*Note.— Specific requirements for the customization of this type of report may vary according to the needs of the client applications of each participant (ground or airborne). The state vector data is the most dynamic of the four ADS-B reports; hence, the applications require frequent updates of the state vector to meet the required accuracy for the operational dynamics of the typical airborne or ground operations of airborne and surface vehicles.*

**5.2.3.3.2 Mode status report.** The mode status report shall contain time of applicability and current operational information about the transmitting participant, including airborne/vehicle address, call sign, ADS-B version number, airborne/vehicle length and width information, state vector quality information, and other information based on information received in aircraft operational status, target state and status, aircraft identification and category, airborne velocity and aircraft status extended squitter messages. Each time that a mode status report is generated, the report assembler function shall update the report time of applicability. Parameters for which valid data is not available shall either be indicated as invalid or omitted from the mode status report.

*Note 1.— Specific requirements for the customization of this type of report may vary according to the needs of the client applications of each participant (ground or airborne).*

*Note 2.— The age of the information being reported within the various data elements of a mode status report may vary as a result of the information having been received within different extended squitter messages at different times. In the absence of item-specific timestamp information, the mode status report includes an optional data update flag that provides applications with the means to establish data age.*

**5.2.3.3.3 Air referenced velocity report.** Air referenced velocity reports shall be generated when air referenced velocity information is received in airborne velocity or ADS-B Wx AIREP extended squitter messages. The air referenced velocity report shall contain time of applicability, airspeed and heading information. Only certain classes of extended

squitter receiving systems, as defined in 5.2.3.5, are required to generate air referenced velocity reports. Each time that an individual air referenced velovcity report is generated, the report assembly function shall update the report time of applicability.

*Note 1.— The air referenced velocity report contains velocity information that is received in airborne velocity or ADS-B Wx AIREP messages along with additional information received in airborne identification and category extended squitter messages. Air referenced velocity reports are not generated for surface participants.*

*Note 2.— Specific requirements for the customization of this type of report may vary according to the needs of the client applications of each participant.*

***Resolution advisory (RA) report.*** The RA report shall contain time of applicability and the contents of an active ACAS resolution advisory (RA) as received in a Type=28 and Subtype=2 extended squitter message.

*Note.— The RA report is only intended to be generated by ground receiving subsystems when supporting a ground ADS-B client application(s) requiring active RA information. An RA report will nominally be generated each time a Type=28, Subtype=2 extended squitter message is received.*

#### 5.2.3.3.4 Target state report

*Note.— The target state report will be generated when information is received in target state and status messages, along with additional information received in airborne identification and category extended squitter messages. The target state and status message is defined in the Technical Provisions for Mode S Services and Extended Squitter (Doc 9871). Specific requirements for the customization of this type of report may vary according to the needs of the client applications of each participant (ground or airborne).*

### 5.2.3.4 Intentionally left blank

### 5.2.3.5 Report time of applicability

The receiving system shall use a local source of reference time as the basis for reporting the time of applicability, as defined for each specific ADS-B TIS-B report type (see 5.2.3.3 and 5.2.3.4).

**5.2.3.5.1** ***GNSS UTC measure reference. For*** receiving systems that generate ADS-B and/or TIS-B reports that use GNSS UTC measured time for the purpose of generating the report time applicability.

UTC measured time data shall have a minimum range of 300 seconds and a resolution of 0.0078125 (1/128) seconds.

#### 5.2.3.5.2 *ESTABLISHED INSTALLATION RECEIVER* TIME REFERENCE

**5.2.3.5.2.1** For receiving systems that generate ADS-B and/or TIS-B reports that do not use GNSS UTC measure time per 5.2.3.5.1 and for which there is no appropriate time reference available, the receiving system shall establish an appropriate internal clock or counter having a maximum clock cycle or count time of 20 milliseconds. The established cycle or clock count shall have a minimum range of 300 seconds and a resolution of 0.0078125 (1/128) seconds.

*Note.— The use of a time reference as described above is intended to allow the report time of applicability to accurately reflect the time intervals applicable to reports within a sequence. For example the applicable time interval between state vector reports could be accurately determined by a client application, even though the absolute time would not be indicated by the report.*

#### 5.2.3.6 REPORTING REQUIREMENTS

**5.2.3.6.1** ***Reporting requirements for Type I Mode S extended squitter airborne receiving systems.*** As a minimum, the report assembler function associated with Type I Mode S extended squitter receiving systems, as defined in 5.2.3, shall support that subset of ADS-B and TIS-B reports and report parameters, that are required by the specific client applications being served by that receiving system.

**5.2.3.6.2** ***Reporting requirements for Type II Mode S extended squitter airborne receiving systems.*** The report assembler function associated with Type II receiving systems, as defined in 5.2.3, shall generate ADS-B and TIS-B reports according to the class of the receiving system as shown in Table 5-4 when the prerequisite ADS-B and/or TIS-B messages are being received.

**5.2.3.6.3** **Reporting requirements for Mode S extended squitter ground receiving systems.** As a minimum, the report assembler function associated with Mode S extended squitter ground receiving systems, as defined in 5.2.3, shall support that subset of ADS-B reports and report parameters that are required by the specific client applications being served by that receiving system.

### 5.2.4 Interoperability

The Mode S extended squitter receiving system shall provide interoperability between the different versions of extended squitter ADS-B message formats.

*Note 1.*— All defined ADS-B versions and their corresponding message formats *are contained in the* Technical Provisions for Mode S Services and Extended Squitter *(Doc9871) and are identified by a version number.*

*Note 2.— ADS-B message formats are defined with backward compatibility with previous versions. An extended squitter receiver can recognize and decode signals of its own version, as well as the message formats from lower versions. The receiver, however, can decode the portion of messages received from a higher version transponder according to its own capability.*

#### 5.2.4.1 Initial message decoding

The Mode S extended squitter receiving system shall, upon acquiring a new ADS-B target, initially apply the decoding provisions applicable to version 0 (zero) ADS-B messages until or unless an aircraft operational status message is received indicating that a higher version message format is in use.

#### 5.2.4.2 Applying version number

The Mode S extended squitter receiving system shall decode the version number information conveyed in the aircraft operational status message and shall apply the corresponding decoding rules for the reported version, up to the highest version

supported by the receiving system, for the decoding of the subsequent extended squitter ADS-B messages from that specific aircraft or vehicle.

#### 5.2.4.3 Handling of reserved message subfields

The Mode S extended squitter receiving system shall ignore the contents of any message subfield defined as reserved.

*Note.— This provision supports interoperability between message versions by allowing the definition of additional parameters that will be ignored by earlier receiver versions and correctly decoded by newer receiver versions.*

## TABLES FOR CHAPTER 5

### Table 5-1. ADS-B Class A equipment characteristics

| *Equipment class* | *Minimum transmit power (at antenna terminal)* | *Maximum transmit power (at antenna terminal)* | *Airborne or surface* | *Minimum extended squitter message capability required (see Note2)* |
|---|---|---|---|---|
| AO (Minimum) | 18.5 dBW (see Note 1) | 27 dBW | Airborne | Airborne position<br>Aircraft identification and category Airborne velocity<br>Aircraft operational status<br>Extended squitter aircraft status |
| | | | Surface | Surface position<br>Aircraft identification and type<br>Aircraft operational status<br>Extended squitter aircraft status |
| A1 (Basic) | 21 dBW | 27 dBW | Airborne | Airborne position<br>Aircraft identification and category Airborne velocity<br>Aircraft operational status<br>Extended squitter aircraft status |
| | | | Surface | Surface position<br>Aircraft identification and category<br>Aircraft operational status<br>Extended squitter aircraft status |
| A2 (Enhanced) | 21 dBW | 27 dBW | Airborne | Airborne position<br>Aircraft identification and category Airborne velocity<br>Aircraft operational status<br>Extended squitter aircraft status<br>Target state and status |
| | | | Surface | Surface position<br>Aircraft identification and category<br>Aircraft operational status<br>Extended squitter aircraft status |
| A3 (Extended) | 23 dBW | 27 dBW | Airborne | Airborne position<br>Aircraft identification and category Airborne velocity<br>Aircraft operational status<br>Extended squitter aircraft status<br>Target state and status |
| | | | Surface | Surface position<br>Aircraft identification and category<br>Aircraft operational status<br>Extended squitter aircraft status |

*Note 1.— See Chapter 3, 3.1.2.10.2 for restrictions on the use of this category of Mode S transponder.*

*Note 2.— The extended squitter messages applicable to Class A equipment are defined in of the* Technical Provisions for Mode S Services and Extended Squitter *(Doc 9871).*

**Table 5-2. ADS-B Class B equipment characteristics**

| *Equipment class* | *Minimum transmit power (at antenna terminal)* | *Maximum transmit power (at antenna terminal)* | *Airborne or surface* | *Minimum extended squitter message capability required* |
|---|---|---|---|---|
| BO (Airborne) | 18.5 dBW (see Note 1) | 27 dBW | Airborne | Airborne position<br>Aircraft identification and category<br>Airborne velocity<br>Aircraft operational status<br>Extended squitter aircraft status |
| | | | Surface | Surface position<br>Aircraft identification and category<br>Aircraft operational status<br>Extended squitter aircraft status |
| B1 (Airborne) | 21 dBW | 27 dBW | Airborne | Airborne position<br>Aircraft identification and category<br>Airborne velocity<br>Aircraft operational status<br>Extended squitter aircraft status |
| | | | Surface | Surface position<br>Aircraft identification and category<br>Aircraft operational status<br>Extended squitter aircraft status |
| B2 Low (Ground Vehicle) | 8.5 dBW | < 18.5dBW (see Note2) | Surface | Surface position<br>Aircraft identification and category<br>Aircraft operational status |
| B2 (Ground Vehicle) | 18.5 dBW | 27 dBW (see Note 2) | Surface | Surface position<br>Aircraft identification and category<br>Aircraft operational status |
| B3 (Fixed Obstacle) | 18.5 dBW | 27 dBW (see Note 2) | Airborne (see Note 3) | Airborne position<br>Aircraft identification and category<br>Aircraft operational status |

*Note 1.— See Chapter 3, 3.1.2.10.2 for restrictions on the use of this category of Mode S transponder.*

*Note 2.— The appropriate ATS authority is expected to get the maximum power level permitted.*

*Note 3.— Fixed obstacles use the airborne ADS-B message formats since knowledge of their location is of primary interest to airborne aircraft.*

## Table 5-3. Reception performance for airborne receiving systems

| *Receiver class* | *Intended air-to-air operational range* | *Receiver minimum trigger threshold level (MTL) (see Note 1)* | *Reception Technique (see Note 2)* | *Required extended squitter ADS-B message support (includes ADS-R and ADS-SLR)* | *Required extended squitter TIS-B message Support (includes management messages)* |
|---|---|---|---|---|---|
| A0 (Basic VFR) | 10 NM | -72 dBm | Standard | Airborne position<br>Surface position<br>Airborne velocity<br>Aircraft identification and category<br>Aircraft status<br>Aircraft operational status | Fine airborne position<br>Fine surface position<br>Aircraft Identification and category<br>Airborne velocity<br>Management |
| A1 (Basic IFR) | 20 NM | -79 dBm | Enhanced | Airborne position<br>Surface position<br>Airborne velocity<br>Aircraft identification and category<br>Aircraft status<br>Aircraft operational status | Fine airborne position<br>Fine surface position<br>Aircraft Identification and category<br>Airborne velocity<br>Management |
| A2 (Enhanced IFR) | 40 NM | -79 dBm | Enhanced | Airborne position<br>Surface position<br>Airborne velocity<br>Aircraft identification and category<br>Aircraft status<br>Aircraft operational status<br>Target state and status | Fine airborne position<br>Fine surface position<br>Aircraft Identification and category<br>Airborne velocity<br>Management |
| A3 (Extended capability) | 90 NM | -84 dBm (and-87 dBm at15% probability of reception | Enhanced | Airborne position<br>Surface position<br>Airborne velocity<br>Aircraft identification and category<br>Aircraft status<br>Aircraft operational status<br>Target state and status | Fine airborne position<br>Fine surface position<br>Aircraft Identification and category<br>Airborne velocity<br>Management |

*Note 1.— Specific MTL is referenced to the signal level at the output terminal of the antenna, assuming a passive antenna. If electronic amplification is integrated into the antenna assembly, then the MTL is referenced at the input to the amplifier. For Class A3 receivers, a second performance level is defined at a received signal level of -87dBm where 15 per cent of the messages are to be successfully received. MTL values refer to reception under non-interference conditions.*

*Note2.—The extended squitter receiver reception techniques are defined in 5.2.2.4."Standard" reception techniques refer to the baseline techniques, as required for ACAS 1090MHz receivers that are intended to handle single overlapping Mode A/C fruit. "Enhanced" reception techniques refer to techniques intended to provide improved reception performance in the presence of multiple overlapping Mode A/C fruit and improved decoder re-triggering in the presence of overlapping stronger Mode S fruit. The requirements for the enhanced reception techniques that are applicable to the specific airborne receiver classes are defined in 5.2.2.4.*

*Note 3.— Management messages include TIS-B, ADS-R and ADS-SLR services. ADS-Rebroadcast (ADS-R) and ADS-Same Link Rebroadcast (ADS- SLR) are defined in Doc 9871.*

## Table 5-4. Mode S extended squitter airborne receiving system reporting requirements

| *Receiver class* | *Minimum ADS-B reporting requirements* | *Minimum TIS-B reporting requirements* |
|---|---|---|
| A0<br>(Basic VFR) | ADS-B state vector report (per 5.2.3.3.1) and<br>ADS-B mode status report (per 5.2.3.3.2) | TIS-B state report and<br>Traffic uplink management report |
| A1<br>(Basic IFR) | ADS-B state vector report (per 5.2.3.3.1) and<br>ADS-B mode status report (per 5.2.3.3.2) and<br>ADS-B air referenced velocity report (ARV) (per 5.2.3.3.3) | TIS-B state report and<br>Traffic uplink management report |
| A2<br>(Enhanced IFR) | ADS-B state vector report (per 5.2.3.3.1) and<br>ADS-B mode status report (per 5.2.3.3.2) and<br>ADS-B ARV report (per 5.2.3.3.3) and<br>ADS-B target state report (per 5.2.3.3.4) | TIS-B state report and<br>Traffic uplink management report |
| A3<br>(Extended capability) | ADS-B state vector report (per 5.2.3.3.1) and<br>ADS-B mode status report (per 5.2.3.3.2) and<br>ADS-B ARV report (per 5.2.3.3.3) and<br>ADS-B target state report (per 5.2.3.3.4) | TIS-B state report and<br>Traffic uplink management report |
| *Note.— Traffic uplink management reports include TIS-B, ADS-R and ADS-SLR service status.* | | |

FIGURE FOR CHAPTER 5

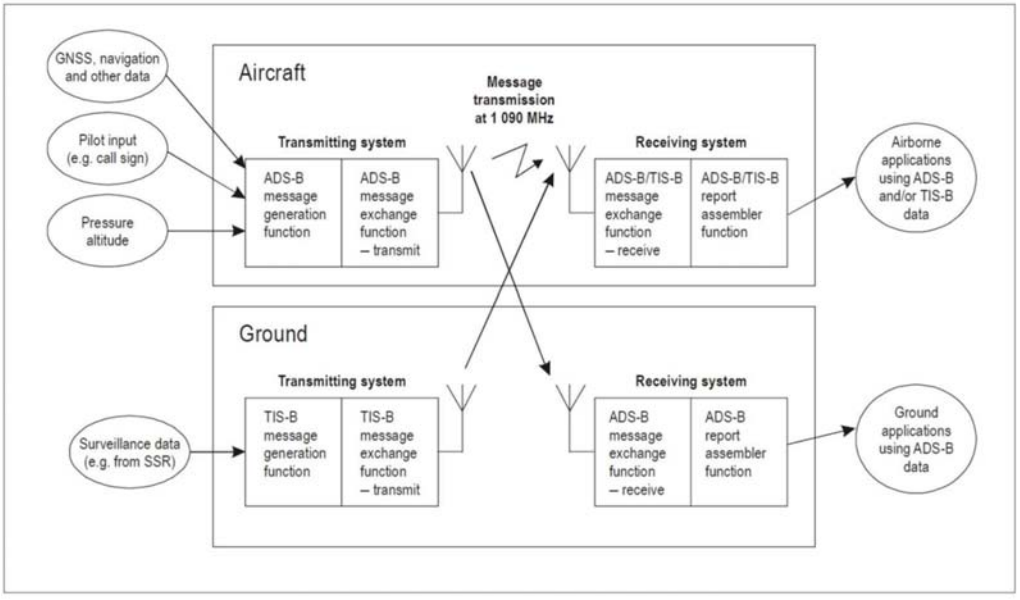


Figure 5-1. ADS-B/TIS-B system functional model

## 6 MULTI LATERATION SYSTEMS

*Note 1.— Multi lateration (MLAT) systems use the time difference of arrival (TDOA) of the transmissions of a SSR transponder (or the extended squitter transmissions of a non-transponder device) between several ground receivers to determine the position of the aircraft (or ground vehicle). A multi lateration system can be:*

*a) passive, using transponder replies to other interrogations or spontaneous squitter transmissions;*

*b) active, in which case the system itself interrogates aircraft in the overage area; or*

*c) a combination of a) and b)*.

*Note2.—Detailed technical guidance for MLAT and WAM can be found in the* Aeronautical Surveillance Manual *(Doc 9924),* Appendix L*. Material contained in EUROCAEED-117A –MOPS for Mode S Multilateration Systems for Use in A-SMGCS and ED-142 – Technical Specifications for Wide Area Multilateration System(WAM) provides i nformation for planning, implementation and satisfactory operation of MLAT systems for most applications.*

### 6.1 DEFINITIONS

***Multi lateration (MLAT) System*.** A group of equipment configured to provide position derived from the secondary surveillance radar (SSR) transponder signals (replies or squitters) primarily using time difference of arrival (TDOA) techniques. Additional information, including identification, can be extracted from the received signals.

***Time Difference of Arrival (TDOA).*** The difference in relative time that a transponder signal from the same aircraft (or ground vehicle) is received at different receivers.

**Wide area multilateration (WAM) system*.*** A multilateration system deployed to support en-route surveillance, terminal area surveillance and other applications such as height monitoring and precision runway monitoring (PRM).

### 6.2 FUNCTIONAL REQUIREMENTS

6.2.1 Radio frequency characteristics, structure and data contents of signals used in 1090 MHz MLAT systems shall conform to the provisions of Chapter 3.

6.2.2 An MLAT system used for air traffic surveillance shall be capable of determining aircraft position and identity.

*Note 1.— Depending on the application, either two- or three-dimensional position of the aircraft may be required.*

*Note 2.— Aircraft identity may be determined from:*

a) Mode A code contained in Mode A or Mode S replies; or

b) Aircraft Identification contained in Mode S replies or extended squitter identity and category message.

*Note 3.— Other aircraft information can be obtained by analyzing transmissions of opportunity (i.e. squitters or replies to other ground interrogations) or by direct interrogation by the MLAT system.*

6.2.3 Where an MLAT system is equipped to decode additional position information contained in transmissions, it shall report such information separately from the aircraft position calculated based on TDOA.

## *6.3* PROTECTION OF THE RADIO FREQUENCY ENVIRONMENT

*Note.— This section only applies to active MLAT systems.*

6.3.1 In order to minimize system interferences the effective radiated power of active interrogators shall be reduced to the lowest value consistent with the operationally required range of each individual interrogator site.

*Note.— Guidance material on power consideration is contained in the* Aeronautical Surveillance Manual *(Doc 9924).*

6.3.2 An active MLAT system shall not use active interrogations to obtain information that can be obtained by passive reception within each required update period.

*Note. — Transponder occupancy will be increased by the use of omni directional antennas. It is particularly significant for Mode S selective interrogations because of their higher transmission rate. All Mode S transponders will be occupied decoding each selective interrogation not just the addressed transponder.*

6.3.3 An active MLAT system consisting of a set of transmitters shall be considered as a single Mode S interrogator.

6.3.4 The set of transmitters used by all active MLAT systems in any part of the airspace shall not cause any transponder to be impacted such that its occupancy, because of the aggregate of all MLAT 1030 MHz interrogations, is greater than 2 per cent at anytime.

*Note 1.— This represents a minimum requirement. Some regions may impose stricter requirements.*

*Note 2. — For an MLAT system using only Mode S interrogations, 2 per cent is equivalent to no more than 400 Mode S interrogations per second received by any aircraft from all systems using MLAT technology.*

6.3.5 **Active MLAT systems shall not use Mode S All-Call interrogations.**

*Note. — Mode S aircraft can be acquired by the reception of acquisition squitter or extended squitter even in airspace where there are no active interrogators.*

## 6.4 PERFORMANCE REQUIREMENTS

6.4.1 The performance characteristics of the MLAT system used for air traffic surveillance shall be such that the intended operational service(s) can be satisfactorily supported.

# 7 TECHNICAL REQUIREMENTS FOR AIRBORNE SURVEILLANCE APPLICATIONS

*Note 1.— Airborne surveillance applications are based on aircraft receiving and using ADS-B message information transmitted by other aircraft/vehicles or ground stations. The capability of an aircraft to receive and use ADS-B/TIS-B message information is referred to as ADS-B/TIS-B IN.*

*Note2.—Initial airborne surveillance applications use ADS-B messages on 1090MHz extended squitter to provide airborne traffic situational awareness (ATSA) and are expected to include "In-trail procedures" and "Enhanced visual separation on approach".*

*Note 3.— Detailed description of aforementioned applications can be found in RTCA/DO-289 and DO-312.*

## 7.1 GENERAL REQUIREMENTS

### 7.1.1 Traffic data functions

*Note.— The aircraft transmitting ADS-B messages used by other aircraft for airborne surveillance applications is referred to as the reference aircraft.*

#### 7.1.1.1 IDENTIFYING THE REFERENCE AIRCRAFT

**7.1.1.1.1** The system shall support a function to identify unambiguously each reference aircraft relevant to the application.

#### 7.1.1.2 TRACKING THE REFERENCE AIRCRAFT

**7.1.1.2.1** The system shall support a function to monitor the movements and behavior of each reference aircraft relevant to the application.

#### 7.1.1.3 TRAJECTORY OF THE REFERENCE AIRCRAFT

**7.1.1.3.1** The system should support a computational function to predict the future position of a reference aircraft beyond simple extrapolation.

*Note. — It is anticipated that this function will be required for future applications.*

### 7.1.2 Displaying traffic

*Note. — Provisions contained in this section apply to cases wherein tracks generated by ACAS and by reception of ADS-B/TIS-B IN messages are shown on a single display.*

7.1.2.1 The system shall display only one track for each distinct aircraft on a given display.

*Note. — This is to ensure that tracks established by ACAS and ADS-B /TIS-B IN are properly correlated and mutually validated before being displayed.*

7.1.2.2 Where a track generated by ADS-B/TIS-B IN and a track generated by ACAS have been determined to belong to the same aircraft, the track generated by ADS-B/TIS-B IN shall be displayed.

*Note. — At close distances, it is possible that the track generated by ACAS provides better accuracy than the track generated by ADS-B/TIS-B IN. The requirement above ensures the continuity of the display.*

7.1.2.3 The display of the tracks shall comply with the requirements of ACAS traffic display.

*Note. — Section 4.3 addresses color coding and readability of the display.*

Sd/-
**(Vir Vikram Yadav)**
**Director General of Civil Aviation**